



## **Avaya Solution & Interoperability Test Lab**

---

# **Application Notes for Configuring Dialogic Brooktrout SR140 Fax Software with Avaya Aura® Communication Manager and Avaya Aura® Session Manager using a SIP Trunk Interface - Issue 1.0**

### **Abstract**

These Application Notes describe the procedures for configuring Dialogic Brooktrout SR140 Fax Software with Avaya Aura® Communication Manager and Avaya Aura® Session Manager using a SIP trunk interface.

Dialogic Brooktrout SR140 Fax Software is a host-based Fax over IP (FoIP) engine utilized by fax servers to send and receive fax calls over an IP network. In the tested configuration, Avaya Aura® Session Manager routed fax calls via a SIP trunk to and from a fax server utilizing the Dialogic Brooktrout SR140 Fax Software.

Information in these Application Notes has been obtained through DevConnect compliance testing and additional technical discussions. Testing was conducted via the DevConnect Program at the Avaya Solution and Interoperability Test Lab.

# 1. Introduction

These Application Notes describe the procedures for configuring Dialogic Brooktrout SR140 Fax Software with Avaya Aura® Communication Manager and Avaya Aura® Session Manager using a SIP trunk interface.

Dialogic Brooktrout SR140 Fax Software is a host-based Fax over IP (FoIP) engine utilized by fax servers to send and receive fax calls over an IP network. In the tested configuration, Avaya Aura® Session Manager routed fax calls via a SIP trunk to and from a fax server utilizing the Dialogic Brooktrout SR140 Fax Software.

## 2. General Test Approach and Test Results

The general test approach was to make intra-site and inter-site fax calls to and from a fax server utilizing the Dialogic Brooktrout SR140 Fax Software. The fax server application software used during compliance testing was the Dialogic FaxDiag Tool (fdtool.exe).

### 2.1. Interoperability Compliance Testing

The compliance test cases tested interoperability between Dialogic Brooktrout SR140 Fax Software and Session Manager by making intra-site and inter-site fax calls to and from fax servers that were connected to the Session Manager systems via a SIP trunk. Specifically, the following fax operations were tested during compliance testing:

- Faxes from/to a fax server to/from an analog fax machine at a local site
- Faxes from/to a fax server to/from an analog fax machine at a remote site
- Faxes from/to a fax server to/from a fax server at a remote site

During compliance testing, both ISDN-PRI trunks and SIP trunks were used to connect two Communication Manager systems between two sites.

Faxes were sent with various page lengths and resolutions. For capacity, a large number of 2-page faxes were continuously sent between the two fax servers. Serviceability testing included verifying proper operation/recovery from failed cables, unavailable resources, and Session Manager and fax server restarts. Fax calls were tested with different Avaya Media Gateway media resources to process the fax data. This included the TN2302AP IP Media Processor (MedPro) circuit pack and the TN2602AP IP Media Processor circuit pack in the Avaya G650 Media Gateway; and the integrated Voice over Internet Protocol (VoIP) engine of the Avaya G450 Media Gateway.

### 2.2. Test Results

Dialogic Brooktrout SR140 Fax Software successfully passed compliance testing.

Fax over IP (FoIP) calls consume DSP (Digital Signal Processing) resources for processing fax data on the TN2302AP IP Media Processor (MedPro) circuit pack and the TN2602AP IP Media Processor circuit pack in the Avaya G650 Media Gateway, and the integrated Voice over Internet Protocol (VoIP) engine of the Avaya G450 Media Gateway. To increase the capacity to support

simultaneous fax calls, additional TN2302AP and/or TN2602AP MedPro circuit packs may need to be installed in the Avaya G650 Gateway, and additional Avaya MM760 Media Module or Modules may need to be installed in the Avaya G450 Media Gateway. The information contained in the table below indicates DSP capacities/usage in the Avaya media processors. Customers should work with their Avaya sales representatives to ensure that their fax solutions have adequate licenses and DSP resources to match the intended fax capacity/usage.

<b>Platform Device</b>	<b>DSP Resources per Platform Device</b>	<b>DSP Resources per FoIP Call</b>
TN2302, MM760	64	4
TN2602	64	1

## 2.3. Support

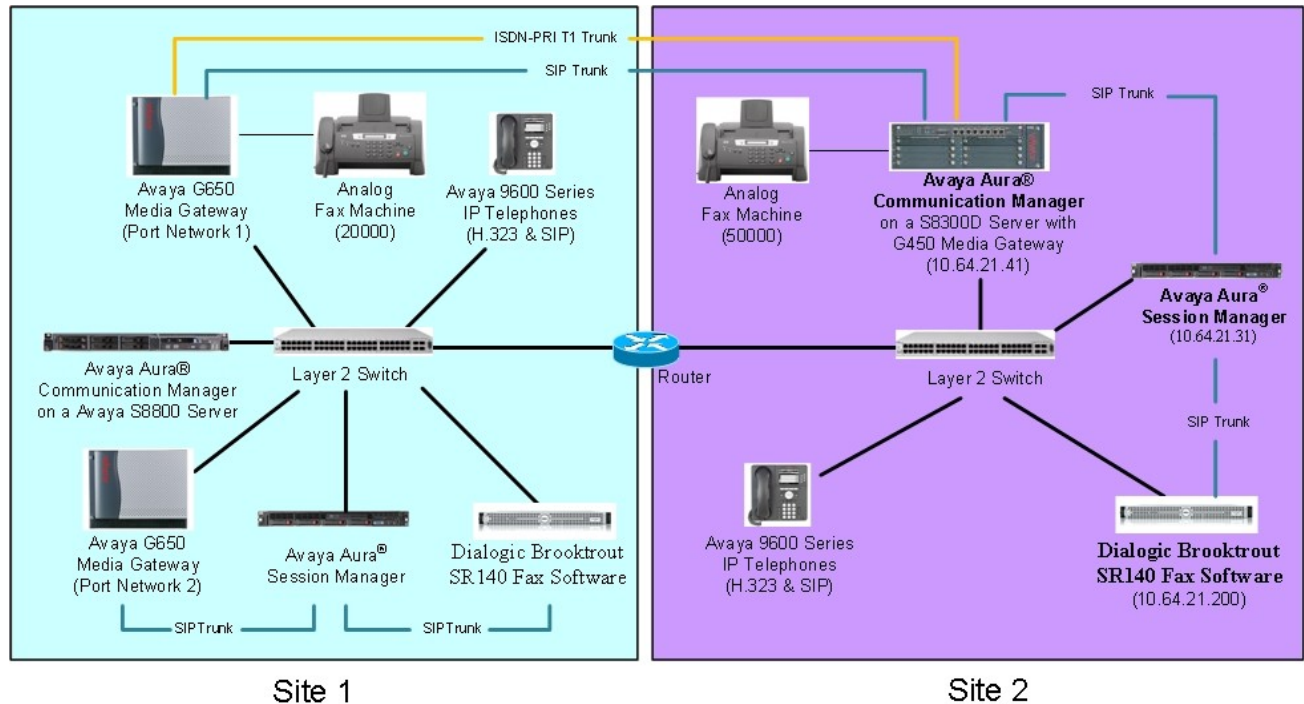
Technical support for the Dialogic Brooktrout SR140 Fax Software can be obtained by contacting Dialogic at:

- Phone: 973-993-1443
- Web: <http://www.dialogic.com/support/contact/default.aspx>

### 3. Reference Configuration

The test configuration was designed to emulate two completely separate corporations/sites with multiple Port Networks at one site (Site 1), and modular Gateway resources at the other site (Site 2).

**Figure 1** illustrates the configuration used in these Application Notes, with a focus on the configuration at Site 2. Communication Manager Servers and Gateways at the two sites were connected via SIP and ISDN-PRI trunks. Faxes were alternately sent between the two sites using these two facilities. The fax servers communicated directly with Session Manager via SIP. Each Session Manager was configured using a System Manager (not shown).



**Figure 1: Dialogic Brooktrout SR140 Fax Software with Session Manager**

Site 1 had an Avaya S8800 Server running Communication Manager with two Avaya G650 Media Gateways. Each media gateway was configured as a separate port network in separate IP network regions. The fax server at this site communicated with Session Manager via a SIP trunk. Session Manager communicated with Communication Manager via a SIP trunk which terminated on a CLAN circuit pack in port network 2. IP media resources were provided by Media Processor (MedPro) circuit packs. Two versions of the MedPro circuit pack were tested in this configuration: TN2302AP and TN2602AP. Endpoints at this site included an Avaya 9600 Series IP Telephone (with H.323 and SIP firmware), and an analog fax machine.

Site 2 had an Avaya S8300D Server running Communication Manager in an Avaya G450 Media Gateway. The fax server at this site communicated with Communication Manager via an SIP trunk. On the Avaya G450 Media Gateway, the signaling and media resources supporting the SIP trunk

were integrated directly on the media gateway processor. Endpoints at this site included Avaya 9600 Series IP Telephones (with H.323 and SIP firmware), and an analog fax machine.

The IP phones (H.323 and SIP) at each site had no specific role in fax operations; therefore, this part of the configuration is not covered in these Application Notes. They were present in the configuration to verify VoIP telephone calls did not have an adverse impact on the FoIP faxing operations.

A fax call originating from a local fax server was sent to Session Manager via a SIP trunk. Based on the dialed digits, Session Manager and Communication Manager routed the fax call either to the local fax machine or to one of the trunks (ISDN-PRI or SIP) to reach the remote site. When the fax call reached the remote site, the Communication Manager at that site routed the call either to the local fax machine or to Session Manager for onward routing to the local fax server over the SIP trunk.

## 4. Equipment and Software Validated

The following equipment and software/firmware were used for the sample configuration provided:

Equipment	Software/Firmware
<b>Site 1</b>	
Avaya S8800 Server (not shown in <b>Figure 1</b> ).	Avaya Aura® System Manager: 6.0.0 (Build No. – 6.0.0.0.668-3.0.7. 2) (Avaya Aura® System Platform: 6.0.2.1.5)
Avaya S8800 Server	Avaya Aura® Session Manager 6.0.2.0.602004
Avaya S8800 Server	Avaya Aura® Communication Manager 6.0.1 (R016x.00.1.510.1 with Patch 19358)
Avaya G650 Media Gateway (at Main Site) - 2 CLANs - 2 MedPros – TN2302 - 2 MedPros – TN2602	TN799DP - HW01 FW38 & HW13 FW 38 TN2302AP - HW20 FW120 TN2602AP - HW02 FW057
Avaya 9600 Series IP Deskphones (H.323)	Release 3.1 Service Pack 3 (96x0) Release 6 Service Pack 5 (96x1G)
Avaya 9600 Series IP Deskphones (SIP)	Release 2.6 Service Pack 5 (96x0) Release 6 Service Pack 2 (96x1G)
Analog Fax Machine	-
Fax Server – Dialogic FaxDiagTool on a Windows 2008 Server	Compiled with SDK 6.2.4
Dialogic Brooktrout SR140 Fax Software – Boston Bfv API – Boston Driver – Boston SDK – Boot ROM	v6.2.4 (Build 12) v6.2.0 (Build 4) v6.2.4 (Build 12) 6.2.1B9
<b>Site 2</b>	
Dell™ PowerEdge™ R610 Server	Avaya Aura® System Manager: 6.1.0 (Build No. – 6.1.0.0.7345-6.1.5.502), Software Update

	Revision No : 6.1.9.1.1634 (Avaya Aura® System Platform: 6.0.3.4.3)
HP ProLiant DL360 G7 Server	Avaya Aura® Session Manager 6.1.5.0.615006
Avaya S8300D Media Server	Avaya Aura® Communication Manager 6.0.1 (R016x.00.1.510.1 with Patch 19303)
Avaya G450 Media Gateway	31.18.1
Avaya 9600 Series IP Deskphones (H.323)	Release 3.1 Service Pack 3 (96x0) Release 6 Service Pack 5 (96x1G)
Avaya 9600 Series IP Deskphones (SIP)	Release 2.6 Service Pack 5 (96x0) Release 6 Service Pack 2 (96x1G)
Analog Fax Machine	-
Fax Server – Dialogic FaxDiagTool on a Windows 2003 Server	Compiled with SDK 6.2.4
Dialogic Brooktrout SR140 Fax Software <ul style="list-style-type: none"> <li>– Boston Bfv API</li> <li>– Boston Driver</li> <li>– Boston SDK</li> <li>– Boot ROM</li> </ul>	v6.2.4 (Build 12) v6.2.0 (Build 4) v6.2.4 (Build 12) 6.2.1B9

## 5. Configure Avaya Aura® Communication Manager

This section describes the Communication Manager configuration necessary to interoperate with the Dialogic Brooktrout SR140 Fax Software. It focuses on the configuration of the routing and SIP trunk between Communication Manager and Session Manager. All other components are assumed to be in place and previously configured, including the SIP and ISDN-PRI trunks that connect Sites 1 and 2 in **Figure 1**.

The examples shown in this section refer to Site 2. Similar steps also apply to Site 1 using values appropriate for that location.

The configuration of Communication Manager was performed using the System Access Terminal (SAT). After the completion of the configuration, the **save translation** command was used to make the changes permanent.

### 5.1. Steps to Configure Communication Manager

The procedures for configuring Communication Manager include the following areas:

- Verify Communication Manager License (Step 1)
- Administer IP Network Region (Step 2)
- Administer IP Codec Set (Step 3)
- Administer IP Node Names (Step 4)
- Administer SIP Signaling Group (Step 5)
- Administer SIP Trunk Group (Step 6)
- Administer Private Numbering (Step 7)
- Administer Route Pattern (Step 8)
- Administer AAR Analysis (Step 9)

Step	Description																																		
1.	<p><b>Verify Communication Manager License</b></p> <p>Use the <b>display system-parameters customer-options</b> command to verify that the Communication Manager license has proper permissions for features illustrated in these Application Notes. Navigate to <b>Page 2</b>, and verify that there is sufficient remaining capacity for SIP trunks by comparing the <b>Maximum Administered SIP Trunks</b> field value with the corresponding value in the <b>USED</b> column.</p> <p>The license file installed on the system controls the maximum trunks permitted. If there is insufficient capacity, contact an authorized Avaya sales representative to acquire the appropriate licenses.</p>																																		
	<pre>display system-parameters customer-options</pre> <p style="text-align: right;"><b>Page 2 of 11</b></p> <p style="text-align: center;">OPTIONAL FEATURES</p> <table> <thead> <tr> <th>IP PORT CAPACITIES</th><th>USED</th></tr> </thead> <tbody> <tr> <td>Maximum Administered SIP Trunks: 12000</td><td>57</td></tr> <tr> <td>Maximum Concurrently Registered IP Stations: 18000</td><td>9</td></tr> <tr> <td>Maximum Administered Remote Office Trunks: 12000</td><td>0</td></tr> <tr> <td>Maximum Concurrently Registered Remote Office Stations: 18000</td><td>0</td></tr> <tr> <td>Maximum Concurrently Registered IP eCons: 414</td><td>0</td></tr> <tr> <td>Max Concur Registered Unauthenticated SIP Stations: 100</td><td>0</td></tr> <tr> <td>Maximum Video Capable Stations: 18000</td><td>0</td></tr> <tr> <td>Maximum Video Capable IP Softphones: 18000</td><td>1</td></tr> <tr> <td><b>Maximum Administered SIP Trunks: 24000</b></td><td><b>170</b></td></tr> <tr> <td>Maximum Administered Ad-hoc Video Conferencing Ports: 24000</td><td>0</td></tr> <tr> <td>Maximum Number of DS1 Boards with Echo Cancellation: 522</td><td>0</td></tr> <tr> <td>Maximum TN2501 VAL Boards: 128</td><td>0</td></tr> <tr> <td>Maximum Media Gateway VAL Sources: 250</td><td>1</td></tr> <tr> <td>Maximum TN2602 Boards with 80 VoIP Channels: 128</td><td>0</td></tr> <tr> <td>Maximum TN2602 Boards with 320 VoIP Channels: 128</td><td>0</td></tr> <tr> <td>Maximum Number of Expanded Meet-me Conference Ports: 300</td><td>0</td></tr> </tbody> </table> <p>(NOTE: You must logoff &amp; login to effect the permission changes.)</p>	IP PORT CAPACITIES	USED	Maximum Administered SIP Trunks: 12000	57	Maximum Concurrently Registered IP Stations: 18000	9	Maximum Administered Remote Office Trunks: 12000	0	Maximum Concurrently Registered Remote Office Stations: 18000	0	Maximum Concurrently Registered IP eCons: 414	0	Max Concur Registered Unauthenticated SIP Stations: 100	0	Maximum Video Capable Stations: 18000	0	Maximum Video Capable IP Softphones: 18000	1	<b>Maximum Administered SIP Trunks: 24000</b>	<b>170</b>	Maximum Administered Ad-hoc Video Conferencing Ports: 24000	0	Maximum Number of DS1 Boards with Echo Cancellation: 522	0	Maximum TN2501 VAL Boards: 128	0	Maximum Media Gateway VAL Sources: 250	1	Maximum TN2602 Boards with 80 VoIP Channels: 128	0	Maximum TN2602 Boards with 320 VoIP Channels: 128	0	Maximum Number of Expanded Meet-me Conference Ports: 300	0
IP PORT CAPACITIES	USED																																		
Maximum Administered SIP Trunks: 12000	57																																		
Maximum Concurrently Registered IP Stations: 18000	9																																		
Maximum Administered Remote Office Trunks: 12000	0																																		
Maximum Concurrently Registered Remote Office Stations: 18000	0																																		
Maximum Concurrently Registered IP eCons: 414	0																																		
Max Concur Registered Unauthenticated SIP Stations: 100	0																																		
Maximum Video Capable Stations: 18000	0																																		
Maximum Video Capable IP Softphones: 18000	1																																		
<b>Maximum Administered SIP Trunks: 24000</b>	<b>170</b>																																		
Maximum Administered Ad-hoc Video Conferencing Ports: 24000	0																																		
Maximum Number of DS1 Boards with Echo Cancellation: 522	0																																		
Maximum TN2501 VAL Boards: 128	0																																		
Maximum Media Gateway VAL Sources: 250	1																																		
Maximum TN2602 Boards with 80 VoIP Channels: 128	0																																		
Maximum TN2602 Boards with 320 VoIP Channels: 128	0																																		
Maximum Number of Expanded Meet-me Conference Ports: 300	0																																		



Step	Description
2.	<p><b>Administer IP Network Region</b></p> <p>Use the <b>change ip-network-region</b> command to administer the network region settings. The values shown below are the values used during compliance testing. Note that the <b>IP-IP Direct Audio</b> settings must be disabled.</p> <ul style="list-style-type: none"> <li>▪ <b>Authoritative Domain:</b> <i>avaya.com</i></li> <li>▪ <b>Name:</b> Any descriptive name may be used (if desired).</li> <li>▪ <b>Intra-region IP-IP Direct Audio:</b> <i>no</i>  <b>Inter-region IP-IP Direct Audio:</b> <i>no</i>  By default, IP-IP direct audio (media shuffling) is enabled to allow audio traffic to be sent directly between IP endpoints without using media resources in the Avaya Media Gateway. Shuffling can be further restricted at the trunk level on the <b>Signaling Group</b> form.</li> <li>▪ <b>Codec Set:</b> <i>1</i> The codec set contains the list of codecs available for calls within this IP network region.</li> </ul> <pre> change ip-network-region 1                                 IP NETWORK REGION                                 Page 1 of 20  Region: 1 Location:      Authoritative Domain: avaya.com Name: MEDIA PARAMETERS   Codec Set: 1   UDP Port Min: 2048   UDP Port Max: 3329   Intra-region IP-IP Direct Audio: no   Inter-region IP-IP Direct Audio: no   IP Audio Hairpinning? n DIFFSERV/TOS PARAMETERS   Call Control PHB Value: 46   Audio PHB Value: 46   Video PHB Value: 26 802.1P/Q PARAMETERS   Call Control 802.1p Priority: 6   Audio 802.1p Priority: 6   Video 802.1p Priority: 5 AUDIO RESOURCE RESERVATION PARAMETERS SIP IP ENDPOINTS   SIP Link Bounce Recovery? y   Idle Traffic Interval (sec): 20   Keep-Alive Interval (sec): 5   Keep-Alive Count: 5   RSVP Enabled? n </pre>

Step	Description																															
3.	<div><div><div><div><div>Administer IP Codec Set</div><div>Use the <b>change ip-network-set</b> command to administer an IP codec set. IP codec set 1 was used during compliance testing. Multiple codecs can be listed in priority order to allow the codec used by a specific call to be negotiated during call establishment. The example below shows the values used during compliance testing.</div></div></div><div><div><div>change ip-codec-set 1</div><div>Page1 of 2</div></div><div><div>IP Codec Set</div><div>Codec Set: 1</div><div><table><tr><th>Audio Codec</th><th>Silence Suppression</th><th>Frames Per Pkt</th><th>Packet Size (ms)</th></tr><tr><td>1: <b>G.711MU</b></td><td><b>n</b></td><td><b>2</b></td><td><b>20</b></td></tr><tr><td>2:</td><td></td><td></td><td></td></tr><tr><td>3:</td><td></td><td></td><td></td></tr></table></div></div></div></div><div><div><div>On <b>Page 2</b>, set the <b>FAX Mode</b> field to <b>t.38-standard</b>. The <b>Modem Mode</b> field should be set to <b>off</b>.</div><div>Leave the <b>FAX Redundancy</b> setting at its default value of <b>0</b>. A packet redundancy level can be assigned to improve packet delivery and robustness of FAX transport over the network (with increased bandwidth as trade-off). Avaya uses IETF RFC-2198 and ITU-T T.38 specifications as redundancy standard. With this standard, each Fax over IP packet is sent with additional (redundant) 0 to 3 previous fax packets based on the redundancy setting. A setting of 0 (no redundancy) is suited for networks where packet loss is not a problem.</div></div><div><div><div>change ip-codec-set 1</div><div>Page2 of 2</div></div><div><div>IP Codec Set</div><div>Allow Direct-IP Multimedia? y</div><div>Maximum Call Rate for Direct-IP Multimedia: 2048:Kbits</div><div>Maximum Call Rate for Priority Direct-IP Multimedia: 2048:Kbits</div><div><table><tr><th></th><th>Mode</th><th>Redundancy</th></tr><tr><td><b>FAX</b></td><td><b>t.38-standard</b></td><td>0</td></tr><tr><td><b>Modem</b></td><td><b>off</b></td><td>0</td></tr><tr><td>TDD/TTY</td><td>US</td><td>3</td></tr><tr><td>Clear-channel</td><td>n</td><td>0</td></tr></table></div></div></div></div></div>	Audio Codec	Silence Suppression	Frames Per Pkt	Packet Size (ms)	1: <b>G.711MU</b>	<b>n</b>	<b>2</b>	<b>20</b>	2:				3:					Mode	Redundancy	<b>FAX</b>	<b>t.38-standard</b>	0	<b>Modem</b>	<b>off</b>	0	TDD/TTY	US	3	Clear-channel	n	0
Audio Codec	Silence Suppression	Frames Per Pkt	Packet Size (ms)																													
1: <b>G.711MU</b>	<b>n</b>	<b>2</b>	<b>20</b>																													
2:																																
3:																																
	Mode	Redundancy																														
<b>FAX</b>	<b>t.38-standard</b>	0																														
<b>Modem</b>	<b>off</b>	0																														
TDD/TTY	US	3																														
Clear-channel	n	0																														

Step	Description																										
4.	<p><b>Administer IP Node Names</b></p> <p>Use the <b>change node-names ip</b> command to create a node name and enter the IP address of Session Manager. Enter a descriptive name in the <b>Name</b> column and the Session Manager IP address in the <b>IP address</b> column. Also note the node name of the processor (<b>procr</b>) as it will be used later to configure the SIP trunk between Communication Manager and Session Manager.</p>																										
	<pre>change node-names ip</pre> <div> <div>Page</div> <div>1 of 2</div> </div> <table> <tr> <th colspan="2">IP NODE NAMES</th></tr> <tr> <th>Name</th><th>IP Address</th></tr> <tr> <td>AES_21_46</td><td>10.64.21.46</td></tr> <tr> <td>CM_20_40</td><td>10.64.20.40</td></tr> <tr> <td>CM_22_12_CLAN1A</td><td>10.64.22.16</td></tr> <tr> <td>CM_22_12_CLAN2A</td><td>10.64.22.19</td></tr> <tr> <td>IPO_21_64</td><td>10.64.21.64</td></tr> <tr> <td>SM_20_31</td><td>10.64.20.31</td></tr> <tr> <td><b>SM_21_31</b></td><td><b>10.64.21.31</b></td></tr> <tr> <td>default</td><td>0.0.0.0</td></tr> <tr> <td>msgserver</td><td>10.64.21.41</td></tr> <tr> <td><b>procr</b></td><td><b>10.64.21.41</b></td></tr> <tr> <td>procr6</td><td>::</td></tr> </table>	IP NODE NAMES		Name	IP Address	AES_21_46	10.64.21.46	CM_20_40	10.64.20.40	CM_22_12_CLAN1A	10.64.22.16	CM_22_12_CLAN2A	10.64.22.19	IPO_21_64	10.64.21.64	SM_20_31	10.64.20.31	<b>SM_21_31</b>	<b>10.64.21.31</b>	default	0.0.0.0	msgserver	10.64.21.41	<b>procr</b>	<b>10.64.21.41</b>	procr6	::
IP NODE NAMES																											
Name	IP Address																										
AES_21_46	10.64.21.46																										
CM_20_40	10.64.20.40																										
CM_22_12_CLAN1A	10.64.22.16																										
CM_22_12_CLAN2A	10.64.22.19																										
IPO_21_64	10.64.21.64																										
SM_20_31	10.64.20.31																										
<b>SM_21_31</b>	<b>10.64.21.31</b>																										
default	0.0.0.0																										
msgserver	10.64.21.41																										
<b>procr</b>	<b>10.64.21.41</b>																										
procr6	::																										

Step	Description
5.	<p><b>Administer SIP Signaling Group</b></p> <p>During compliance testing, a SIP signaling group and the associated SIP trunk group was used for routing fax calls to/from the fax server via Session Manager. Use the <b>add signaling-group</b> command to create a signaling group for use by the SIP trunk to the fax server. Signaling group <b>1</b> was configured using the parameters highlighted below. Default values may be used for all other fields.</p> <ul style="list-style-type: none"> <li>▪ Set the <b>Group Type</b> to <b>SIP</b>.</li> <li>▪ The <b>Transport Method</b> was set to the recommended default value of <b>tls</b> (Transport Layer Security). As a result, the <b>Near-end Listen Port</b> and <b>Far-end Listen Port</b> are automatically set to <b>5061</b></li> <li>▪ Set the <b>Near-end Node Name</b> to the node name that maps to the IP address of the processor (i.e. <b>procr</b>) used to connect to Session Manager (see <b>Step 4</b>).</li> <li>▪ Set the <b>Far-end Node Name</b> to the node name that maps to the IP address of Session Manager configured in <b>Step 4</b>.</li> <li>▪ The <b>Far-end Network Region</b> was set to <b>1</b>. This is the IP network region which contains Session Manager and the fax server.</li> <li>▪ Set the <b>Direct IP-IP Audio Connections</b> field to <b>n</b>. This setting disables Media Shuffling on the trunk level.</li> <li>▪ The default values were used for all other fields.</li> </ul>
<div> <div>add signaling-group 1</div> <div>SIGNALING GROUP</div> <div> <div> <div>Group Number: 1</div> <div>IMS Enabled? n</div> <div>Q-SIP? n</div> <div>IP Video? y</div> <div>Peer Detection Enabled? y</div> </div> <div> <div>Group Type: sip</div> <div>Transport Method: tls</div> <div>Priority Video? n</div> <div>Peer Server: SM</div> </div> <div> <div>SIP Enabled LSP? n</div> <div>Enforce SIPS URI for SRTP? y</div> </div> </div> <div> <div> <div>Near-end Node Name: procr</div> <div>Near-end Listen Port: 5061</div> </div> <div> <div>Far-end Node Name: SM_21_31</div> <div>Far-end Listen Port: 5061</div> <div>Far-end Network Region: 1</div> </div> </div> <div> <div>Far-end Domain:</div> <div> <div>Incoming Dialog Loopbacks: eliminate</div> <div>DTMF over IP: rtp-payload</div> <div>Session Establishment Timer(min): 3</div> <div>Enable Layer 3 Test? y</div> </div> <div> <div>Bypass If IP Threshold Exceeded? n</div> <div>RFC 3389 Comfort Noise? n</div> <div>Direct IP-IP Audio Connections? n</div> <div>IP Audio Hairpinning? n</div> </div> <div>Alternate Route Timer(sec): 20</div> </div> </div> <div>Page 1 of 1</div>	

Step	Description
6.	<p><b>Administer SIP Trunk Group</b></p> <p>Trunk group <i>1</i> was configured with the <b>add trunk-group</b> command using the parameters highlighted below. Default values may be used for all other fields.</p> <p><b>On Page 1:</b></p> <ul style="list-style-type: none"> <li>▪ Set the <b>Group Type</b> field to <i>sip</i>.</li> <li>▪ Enter a descriptive name for the <b>Group Name</b>.</li> <li>▪ Enter an available trunk access code (TAC) that is consistent with the existing dial plan in the <b>TAC</b> field.</li> <li>▪ Set the <b>Service Type</b> field to <i>tie</i>.</li> <li>▪ Set the <b>Member Assignment Method</b> to <i>auto</i>.</li> <li>▪ Set the <b>Signaling Group</b> to the signaling group shown in the previous step.</li> <li>▪ In <b>Number of Members</b> field, enter the number of trunks in the trunk group. This determines how many simultaneous calls can be supported by the configuration.</li> <li>▪ Default values may be used for all other fields.</li> </ul> <pre> add trunk-group 1                                     Page 1 of 21                                      TRUNK GROUP  Group Number: 1                Group Type: sip                CDR Reports: y   Group Name: to SM_21_31                COR: 1                TN: 1                TAC: 101     Direction: two-way                Outgoing Display? n     Dial Access? n                                Night Service: Queue Length: 0 Service Type: tie                Auth Code? n                                      Member Assignment Method: auto                                      Signaling Group: 1                                      Number of Members: 50 </pre>

Step	Description
	<p><b>Administer SIP Trunk Group – Continued</b>  <b>On Page 3:</b></p> <ul style="list-style-type: none"> <li>Set the <b>Send Name</b> field and <b>Send Calling Number</b> field to <b>y</b>. These settings enable the sending of calling party name and number to the far end.</li> <li>Set the <b>Format</b> field to <b>unk-pvt</b>. This field specifies the format of the calling party number sent to the far-end.</li> <li>Default values may be used for all other fields.</li> </ul> <pre> add trunk-group 1 TRUNK FEATURES     ACA Assignment? n          Measured: none                                 Maintenance Tests? y                                  Numbering Format: unk-pvt                                 UI Treatment: service-provider                                 Replace Restricted Numbers? n                                 Replace Unavailable Numbers? n                                  Modify Tandem Calling Number: no  Show ANSWERED BY on Display? Y </pre>
7.	<p><b>Administer Private Numbering</b>  Private numbering defines the calling party number to be sent to the far-end. Use the <b>change private-numbering</b> command to create an entry that will be used by the trunk group defined in <b>Step 6</b>. In the example shown below, all calls originating from a 5-digit extension beginning with 5 and routed across any trunk group (since the <b>Trk Grp(s)</b> entry is blank) will be sent as a 5-digit calling number.</p> <pre> change private-numbering 0                                 NUMBERING - PRIVATE FORMAT                                 Page 1 of 2  Ext  Ext      Trk      Private      Total Len  Code      Grp(s)    Prefix      Len   5   5                                 5      Total Administered: 2                                 Maximum Entries: 540 </pre>

Step	Description
8.	<p><b>Administer Route Pattern</b></p> <p>Use the <b>change route-pattern</b> command to create a route pattern that will route calls to the SIP trunk that connects to Session Manager.</p> <p>A descriptive name was entered for the <b>Pattern Name</b> field. The <b>Grp No</b> field was set to the trunk group created in <b>Step 6</b>. The Facility Restriction Level (<b>FRL</b>) field was set to a level that allows access to this trunk for all users that require it. The value of <b>0</b> is the least restrictive level. The <b>Numbering Format</b> was set to <b>lev0-pvt</b>. The default values were used for all other fields.</p> <pre> change route-pattern 1                                     Page 1 of 3       Pattern Number: 1   Pattern Name: to SM_21_31       SCCAN? n          Secure SIP? n       Grp FRL NPA Pfx Hop Toll No.  Inserted          DCS/ IXC       No          Mrk Lmt List Del  Digits          QSIG  Dgts        Intw 1: 1      0                               0          n   user 2:                               n          n   user 3:                               n          n   user 4:                               n          n   user 5:                               n          n   user 6:                               n          n   user        BCC VALUE  TSC CA-TSC      ITC BCIE Service/Feature PARM  No.  Numbering  LAR       0 1 2 M 4 W      Request      Dgts  Format  Subaddress 1: y y y y y n  n          rest          lev0-pvt  none 2: y y y y y n  n          rest          none 3: y y y y y n  n          rest          none 4: y y y y y n  n          rest          none 5: y y y y y n  n          rest          none 6: y y y y y n  n          rest          none </pre>
9.	<p><b>Administer AAR Analysis</b></p> <p>Automatic Alternate Routing (AAR) was used to route calls to the fax server via Session Manager. Use the <b>change aar analysis</b> command to create an entry in the AAR Digit Analysis Table for this purpose. The highlighted entry specifies that if the dialed number is 75000 and is 5 digits long, to use route pattern 1. Route pattern 1 routes calls to Session Manager.</p> <pre> change aar analysis 7                                     Page 1 of 2                                      AAR DIGIT ANALYSIS TABLE                                      Location: all          Percent Full: 1        Dialed      Total      Route      Call      Node      ANI       String      Min  Max  Pattern  Type      Num      Req'd       75000       5    5    1       aar          n </pre>

## 6. Configure Avaya Aura® Session Manager

This section provides the procedures for configuring Session Manager as shown in the reference configuration. All provisioning for Session Manager is performed via the System Manager web interface. System Manager delivers a set of shared, secure management services and a common console across multiple products in the Avaya Aura® network, including the central administration of routing policies, and a common format for logs and alarms. This section assumes that Session Manager and System Manager have been installed and that network connectivity exists between the two platforms.

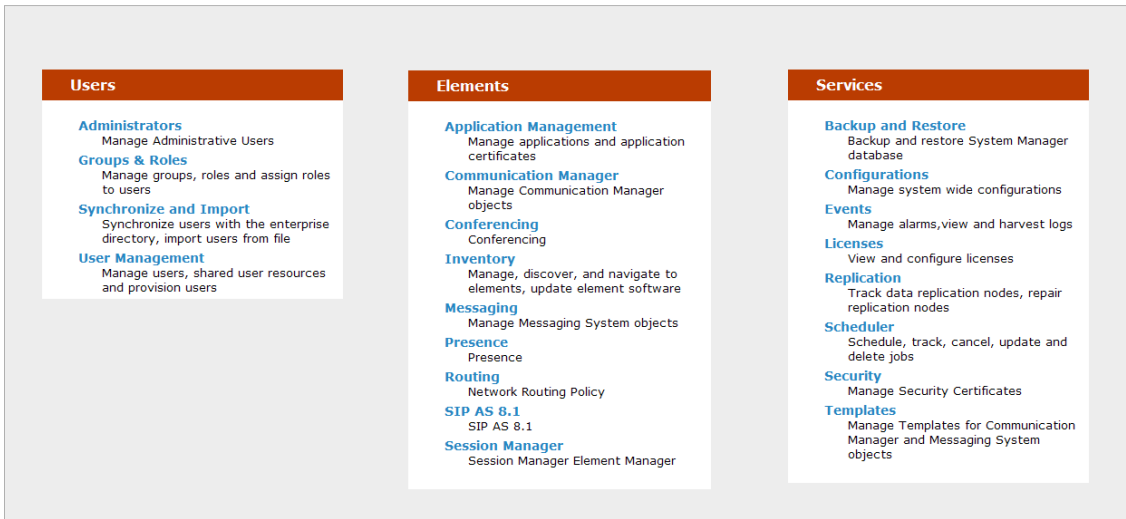
This section summarizes the configuration steps that are necessary for interoperating with Dialogic Brooktrout SR140 Fax Software. The test environment was previously configured to enable Communication Manager and Session Manager at each site to communicate with each other. Details of this configuration and the SIP endpoints are not described in this document. Additional information can be obtained from **Reference [3]**.

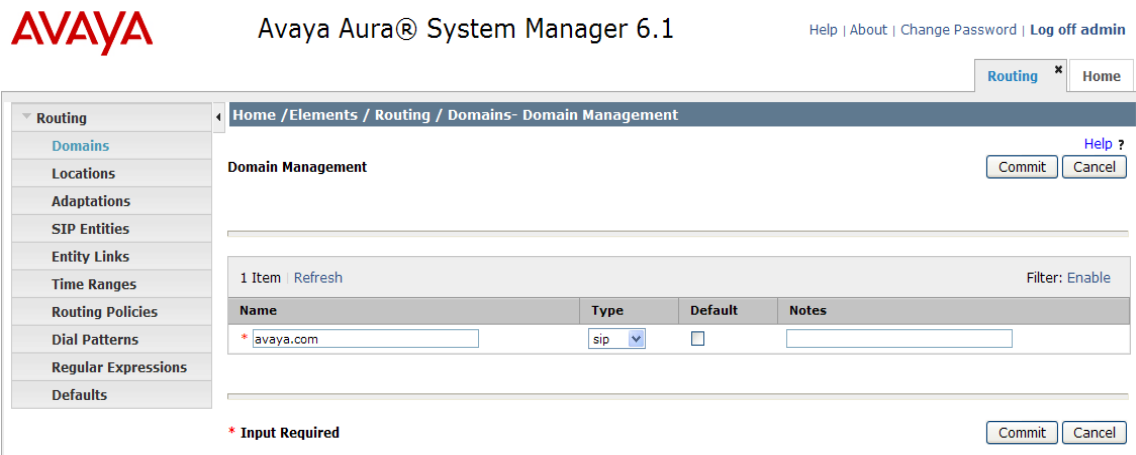
The examples shown in this section refer to Site 2. Similar steps also apply to Site 1 using values appropriate for that location.

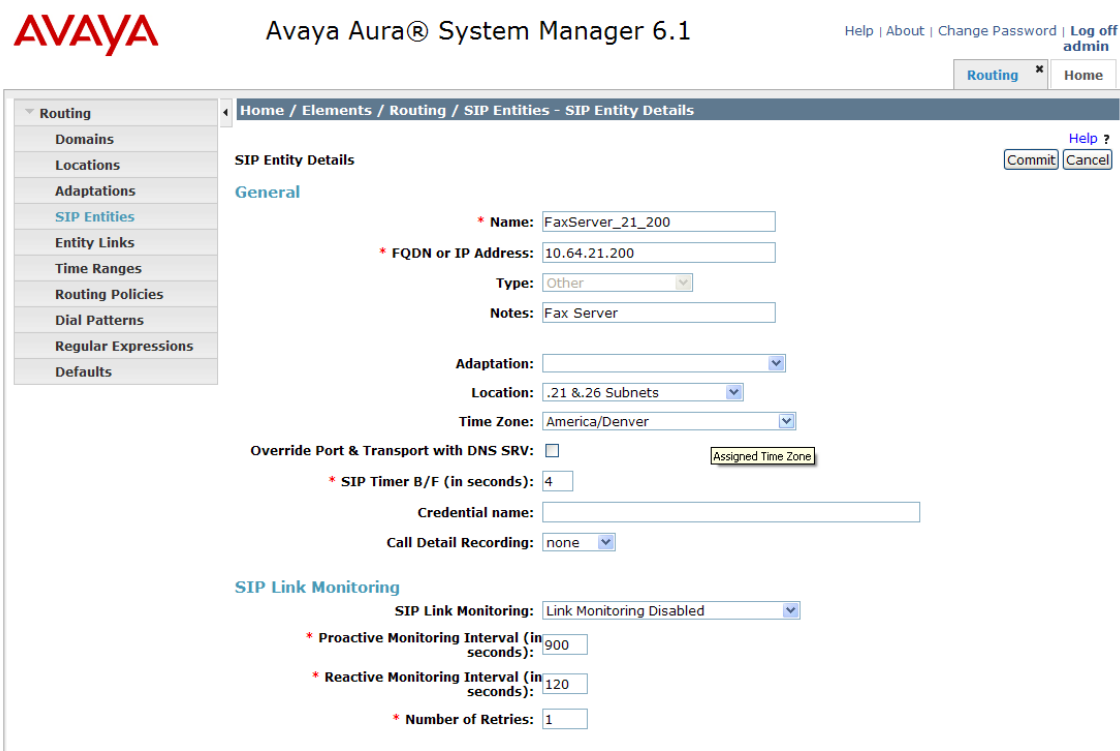
The procedures described in this section include configurations for the following:

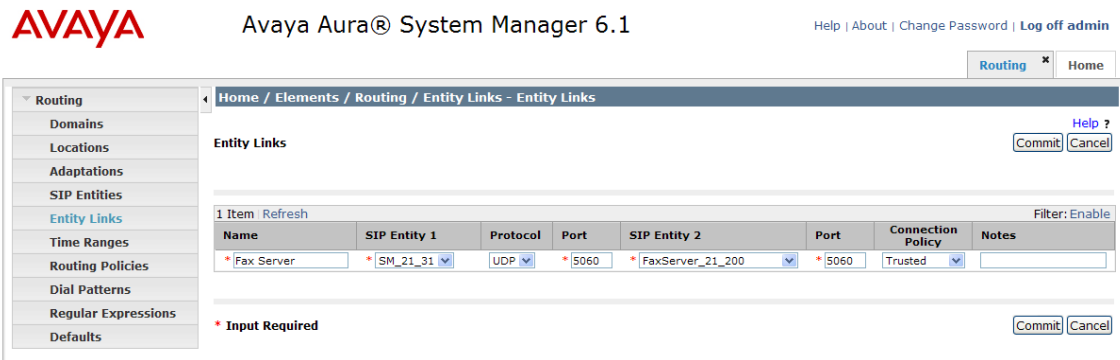
- Login to System Manager (Step 1)
- Create a SIP Domain (Step 2)
- Create a SIP Entity for the fax server (Step 3)
- Create a SIP Entity Link for the fax server (Step 4)
- Create a Routing Policy (Step 5)
- Create a Dial Pattern (Step 6)

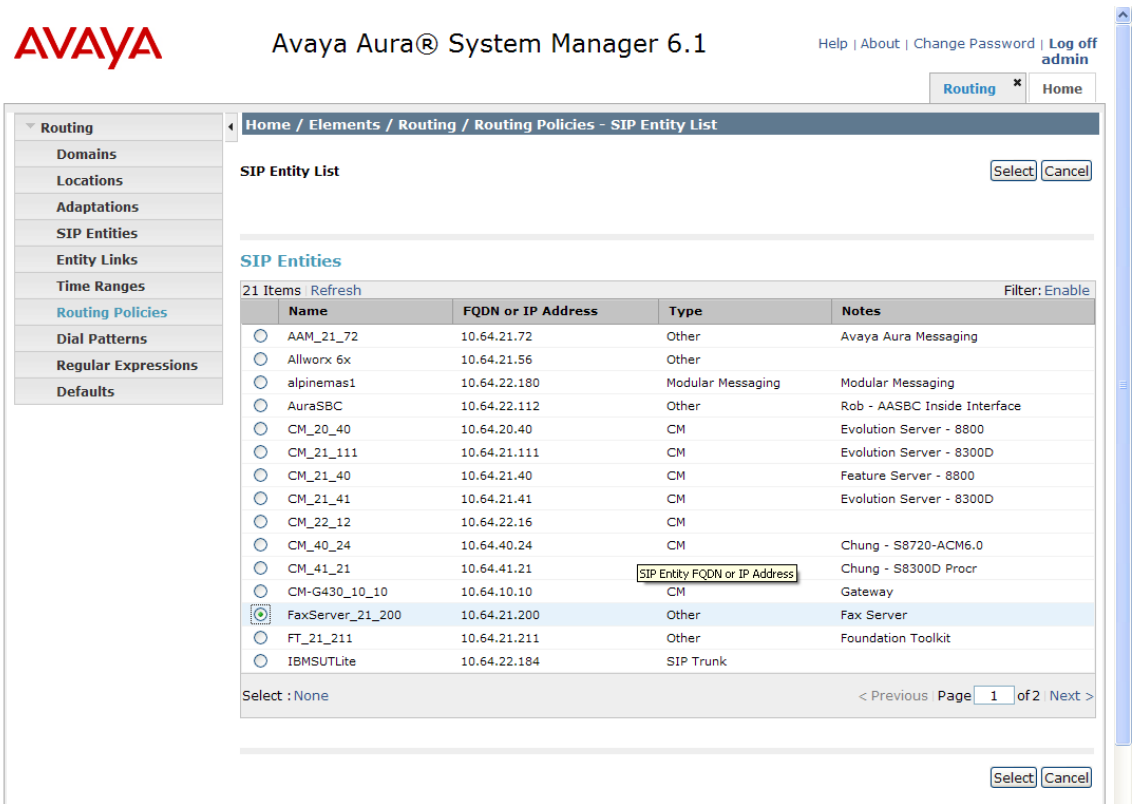


Step	Description
1.	<p><b>Login</b></p> <p>Access the Session Manager administration web interface by entering <a href="https://&lt;ip-addr&gt;/network-login/">https://&lt;ip-addr&gt;/network-login/</a> as the URL in an Internet browser, where &lt;ip-addr&gt; is the IP address of the System Manager server.</p> <p>Log in using appropriate credentials. The main page for the administrative interface is shown below.</p> 

Step	Description
2.	<p><b>Create a SIP Domain</b></p> <p>SIP Domains are the domains for which Session Manager is authoritative in routing SIP calls.</p> <p>Navigate to <b>Elements → Routing → Domains</b>, and click the <b>New</b> button (not shown) to add the SIP domain with the following:</p> <ul style="list-style-type: none"> <li>• <b>Name:</b> <i>avaya.com</i></li> <li>• <b>Type:</b> <i>sip</i></li> <li>• <b>Notes:</b> optional descriptive text</li> </ul> <p>Click <b>Commit</b> to save the configuration.</p> 

Step	Description
3.	<p><b>Create a SIP Entity for the Fax Server</b></p> <p>A SIP Entity must be added for Session Manager and for each SIP-based telephony system supported by it using SIP trunks. During compliance testing, a SIP Entity was added for the Session Manager itself (not shown), Communication Manager (not shown), and the fax server.</p> <p>Navigate to <b>Routing→SIP Entities</b>, and click the <b>New</b> button (not shown) to add a SIP Entity. The configuration details for the SIP Entity defined for the fax server are as follows:</p> <p>Under <b>General</b>:</p> <ul style="list-style-type: none"> <li>• <b>Name</b>: a descriptive name</li> <li>• <b>FQDN or IP Address</b>: <i>10.64.21.200</i> as specified in <b>Figure 1</b>.</li> <li>• <b>Type</b>: select <i>Other</i></li> <li>• <b>Location</b>: select a previously defined location (the definition of the location is not shown in this document). Selecting a location is optional.</li> </ul> <p>Default settings can be used for the remaining fields. Click <b>Commit</b> to save the SIP Entity definition. The screen below shows the SIP Entity configuration details for the fax server.</p>  <p>The screenshot displays the Avaya Aura System Manager 6.1 web interface. The top navigation bar includes the Avaya logo, the title 'Avaya Aura® System Manager 6.1', and links for 'Help', 'About', 'Change Password', and 'Log off admin'. Below the navigation bar, there are tabs for 'Routing' (selected) and 'Home'. The left sidebar shows a tree view with 'Routing' expanded, containing sub-items like 'Domains', 'Locations', 'Adaptations', 'SIP Entities' (selected), 'Entity Links', 'Time Ranges', 'Routing Policies', 'Dial Patterns', 'Regular Expressions', and 'Defaults'. The main content area is titled 'SIP Entity Details' and shows the 'General' tab. The configuration fields are as follows:     <ul style="list-style-type: none"> <li><b>Name</b>: FaxServer_21_200</li> <li><b>FQDN or IP Address</b>: 10.64.21.200</li> <li><b>Type</b>: Other (dropdown)</li> <li><b>Notes</b>: Fax Server</li> <li><b>Adaptation</b>: (empty dropdown)</li> <li><b>Location</b>: .21 &amp;.26 Subnets (dropdown)</li> <li><b>Time Zone</b>: America/Denver (dropdown)</li> <li><b>Override Port &amp; Transport with DNS SRV</b>: (checkbox, unchecked)</li> <li><b>SIP Timer B/F (in seconds)</b>: 4</li> <li><b>Credential name</b>: (empty text field)</li> <li><b>Call Detail Recording</b>: none (dropdown)</li> <li><b>SIP Link Monitoring</b>: Link Monitoring Disabled (dropdown)</li> <li><b>Proactive Monitoring Interval (in seconds)</b>: 900</li> <li><b>Reactive Monitoring Interval (in seconds)</b>: 120</li> <li><b>Number of Retries</b>: 1</li> </ul>     At the top right of the configuration area, there are 'Commit' and 'Cancel' buttons, and a 'Help ?' link.   </p>

Step	Description
4.	<p><b>Create an Entity Link for the Fax Server</b></p> <p>A SIP trunk between Session Manager and a telephony system is described by an Entity link. Two Entity Links were created:</p> <ul style="list-style-type: none"> <li>Session Manager ↔ Communication Manger (not shown)</li> <li>Session Manager ↔ Fax Server</li> </ul> <p>Navigate to <b>Routing→Entity Links</b>, and click the <b>New</b> button (not shown) to add a new Entity Link. The screen below shows the configuration details for the Entity Link connecting Session Manager to the fax server.</p> <ul style="list-style-type: none"> <li><b>Name:</b> a descriptive name</li> <li><b>SIP Entity 1:</b> select the Session Manager SIP Entity.</li> <li><b>Protocol:</b> select <b>UDP</b> as the transport protocol to match the protocol used by the fax server.</li> <li><b>Port:</b> <b>5060</b>. This is the port number to which the other system sends SIP requests.</li> <li><b>SIP Entity 2:</b> select the fax server SIP Entity.</li> <li><b>Port:</b> <b>5060</b>. This is the port number on which the other system receives SIP requests.</li> <li><b>Trusted:</b> check this box</li> <li><b>Notes:</b> optional descriptive text</li> </ul> <p>Click <b>Commit</b> to save the configuration.</p> 

Step	Description
5.	<p><b>Create a Routing Policy</b></p> <p>Routing policies describe the conditions under which calls will be routed to the SIP Entities connected to Session Manager. Routing Policies were added for routing fax calls to the fax server and calls from the fax server to other SIP entities (not shown).</p> <p>Navigate to <b>Routing→Routing Policies</b>, and click the <b>New</b> button (not shown) to add a new Routing Policy.</p> <p>Under <b>General</b>:</p> <ul style="list-style-type: none"> <li>• <b>Name</b>: a descriptive name</li> <li>• <b>Notes</b>: optional descriptive text</li> </ul> <p>Under <b>SIP Entity as Destination</b></p> <p>Click the <b>Select</b> button and the screen below is displayed. Select the fax server SIP Entity (defined in <b>Step 3</b>), to which the routing policy applies, and click the <b>Select</b> button to return to the previous screen.</p>  <p>The screenshot displays the Avaya Aura System Manager 6.1 interface. The left sidebar shows the navigation menu with 'Routing Policies' selected. The main content area shows the 'SIP Entity List' page. The page title is 'Home / Elements / Routing / Routing Policies - SIP Entity List'. Below the title, there are 'Select' and 'Cancel' buttons. The main table lists 21 SIP Entities. The 'FaxServer_21_200' entity is selected, indicated by a blue highlight and a checkmark in the selection column. The table columns are Name, FQDN or IP Address, Type, and Notes. The 'FaxServer_21_200' row shows the name 'FaxServer_21_200', the FQDN '10.64.21.200', the type 'Other', and the note 'Fax Server'. The 'Select : None' text is visible at the bottom of the table. The page number '1 of 2' is shown at the bottom right of the table area.</p>

Step	Description																																																		
	<p>Under <b>Time of Day</b></p> <p>Click <b>Add</b> to select a Time Range (not shown since the default time range of 24/7 was used during compliance testing).</p> <p>Default settings can be used for the remaining fields. Click <b>Commit</b> to save the configuration. The screen below shows the routing policy used during compliance testing.</p> <div><div><div>AVAYA</div><div>Avaya Aura® System Manager 6.1</div><div>Help   About   Change Password   Log off admin</div></div><div><div><div>Routing</div><div>Routing</div><div>Domains</div><div>Locations</div><div>Adaptations</div><div>SIP Entities</div><div>Entity Links</div><div>Time Ranges</div><div>Routing Policies</div><div>Dial Patterns</div><div>Regular Expressions</div><div>Defaults</div></div><div><div>Home / Elements / Routing / Routing Policies - Routing Policy Details</div><div><div>Routing Policy Details</div><div>Help ?</div><div>Commit</div><div>Cancel</div></div><div><div>General</div><div><div>* Name:</div><div>FaxServer_21_200</div></div><div><div>Disabled:</div><div><input type="checkbox"/></div></div><div><div>Notes:</div><div></div></div></div><div><div>SIP Entity as Destination</div><div>Select</div><div><table><thead><tr><th>Name</th><th>FQDN or IP Address</th><th>Type</th><th>Notes</th></tr></thead><tbody><tr><td>FaxServer_21_200</td><td>10.64.21.200</td><td>Other</td><td>Fax Server</td></tr></tbody></table></div></div><div><div>Time of Day</div><div><div>Add</div><div>Remove</div><div>View Gaps/Overlaps</div></div><div><div>1 Item</div><div>Refresh</div><div>Filter: Enable</div></div><div><table><thead><tr><th><input type="checkbox"/></th><th>Ranking 1</th><th>Name 2</th><th>Mon</th><th>Tue</th><th>Wed</th><th>Thu</th><th>Fri</th><th>Sat</th><th>Sun</th><th>Start Time</th><th>End Time</th><th>Notes</th></tr></thead><tbody><tr><td><input type="checkbox"/></td><td>0</td><td>24/7</td><td><input checked="" type="checkbox"/></td><td><input checked="" type="checkbox"/></td><td><input checked="" type="checkbox"/></td><td><input checked="" type="checkbox"/></td><td><input checked="" type="checkbox"/></td><td><input checked="" type="checkbox"/></td><td><input checked="" type="checkbox"/></td><td>00:00</td><td>23:59</td><td>Time Range 24/7</td></tr></tbody></table></div><div>Select : All, None</div></div><div><div>Dial Patterns</div><div><div>Add</div><div>Remove</div></div><div><div>1 Item</div><div>Refresh</div><div>Filter: Enable</div></div><div><table><thead><tr><th><input type="checkbox"/></th><th>Pattern</th><th>Min</th><th>Max</th><th>Emergency Call</th><th>SIP Domain</th><th>Originating Location</th><th>Notes</th></tr></thead><tbody><tr><td><input type="checkbox"/></td><td>75</td><td>5</td><td>5</td><td><input type="checkbox"/></td><td>avaya.com</td><td>-ALL-</td><td>to local Fax Server</td></tr></tbody></table></div><div>Select : All, None</div></div></div></div></div>	Name	FQDN or IP Address	Type	Notes	FaxServer_21_200	10.64.21.200	Other	Fax Server	<input type="checkbox"/>	Ranking 1	Name 2	Mon	Tue	Wed	Thu	Fri	Sat	Sun	Start Time	End Time	Notes	<input type="checkbox"/>	0	24/7	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	00:00	23:59	Time Range 24/7	<input type="checkbox"/>	Pattern	Min	Max	Emergency Call	SIP Domain	Originating Location	Notes	<input type="checkbox"/>	75	5	5	<input type="checkbox"/>	avaya.com	-ALL-	to local Fax Server
Name	FQDN or IP Address	Type	Notes																																																
FaxServer_21_200	10.64.21.200	Other	Fax Server																																																
<input type="checkbox"/>	Ranking 1	Name 2	Mon	Tue	Wed	Thu	Fri	Sat	Sun	Start Time	End Time	Notes																																							
<input type="checkbox"/>	0	24/7	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	00:00	23:59	Time Range 24/7																																							
<input type="checkbox"/>	Pattern	Min	Max	Emergency Call	SIP Domain	Originating Location	Notes																																												
<input type="checkbox"/>	75	5	5	<input type="checkbox"/>	avaya.com	-ALL-	to local Fax Server																																												

Step	Description
6.	<p><b>Create Dial Pattern</b></p> <p>Dial Patterns define digit strings to be matched against dialed numbers for directing calls to the appropriate SIP Entities. 5-digit numbers beginning with “75” were routed to the fax server.</p> <p>Navigate to <b>Routing→Dial Patterns</b>, click the <b>New</b> button (not shown) to add a new Dial Pattern.</p> <p>Under <b>General</b>:</p> <ul style="list-style-type: none"> <li>• <b>Pattern</b>: dialed number or prefix</li> <li>• <b>Min</b>: minimum length of dialed number</li> <li>• <b>Max</b>: maximum length of dialed number</li> <li>• <b>SIP Domain</b>: select the SIP Domain created in <b>Step 2</b> (or select <b>–ALL–</b> to be less restrictive)</li> <li>• <b>Notes</b>: optional descriptive text</li> </ul> <p>Under <b>Originating Locations and Routing Policies</b></p> <p>Click <b>Add</b> to select the appropriate originating Location (e.g. <b>–ALL–</b>) and Routing Policy (e.g. <b>FaxServer_21_200</b>) from the list (not shown).</p> <p>Default settings can be used for the remaining fields. Click <b>Commit</b> to save the configuration.</p>

Step

Description

AVAYA

Avaya Aura® System Manager 6.1

Help | About | Change Password | Log off admin

Routing

Home

Home / Elements / Routing / Dial Patterns - Dial Pattern Details

Dial Pattern Details

Commit

Cancel

Help ?

Routing

Domains

Locations

Adaptations

SIP Entities

Entity Links

Time Ranges

Routing Policies

Dial Patterns

Regular Expressions

Defaults

General

\* Pattern:

75

\* Min:

5

\* Max:

5

Emergency Call:

☐

SIP Domain:

avaya.com

Notes:

to local Fax Server

Originating Locations and Routing Policies

Add

Remove

1 Item

Refresh

Filter: Enable

<input type="checkbox"/>	Originating Location Name <sup>1</sup>	Originating Location Notes	Routing Policy Name	Rank <sup>2</sup>	Routing Policy Disabled	Routing Policy Destination	Routing Policy Notes
<input type="checkbox"/>	-ALL-	Any Locations	FaxServer_21_200	0	<input type="checkbox"/>	FaxServer_21_200	

Select : All, None

Denied Originating Locations

Add

Remove

0 Items

Refresh

Filter: Enable

<input type="checkbox"/>	Originating Location	Notes
--------------------------	----------------------	-------

\* Input Required

Commit

Cancel



## 7. Configure Dialogic Brooktrout SR140 Fax Software

This section describes the configuration of the Dialogic Brooktrout SR140 Fax Software. It assumes that a fax server application and all required software components, including Dialogic Brooktrout SR140 Fax Software, have been installed and properly licensed. For instructions on installing Dialogic Brooktrout SR140 Fax Software, consult the Dialogic Brooktrout SR140 Fax Software documentation (**Reference [4]**).

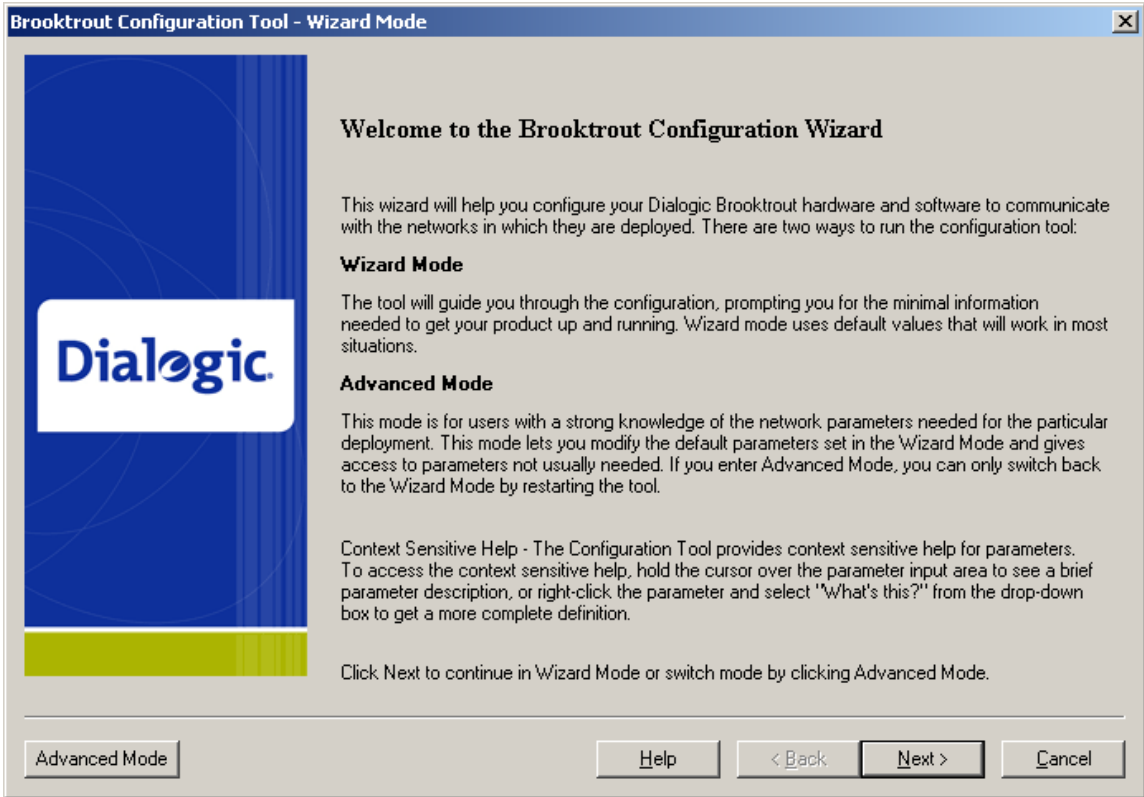
Note that the configurations documented in this section pertain to interoperability between the Dialogic Brooktrout SR140 Fax Software and the Avaya SIP infrastructure. The standard configurations pertaining to the Dialogic Brooktrout SR140 Fax Software itself (e.g., administering fax channels) are not covered. For instructions on administering and operating the Dialogic Brooktrout SR140 Fax Software, consult the Dialogic Brooktrout SR140 Fax Software documentation (**Reference [4]**).

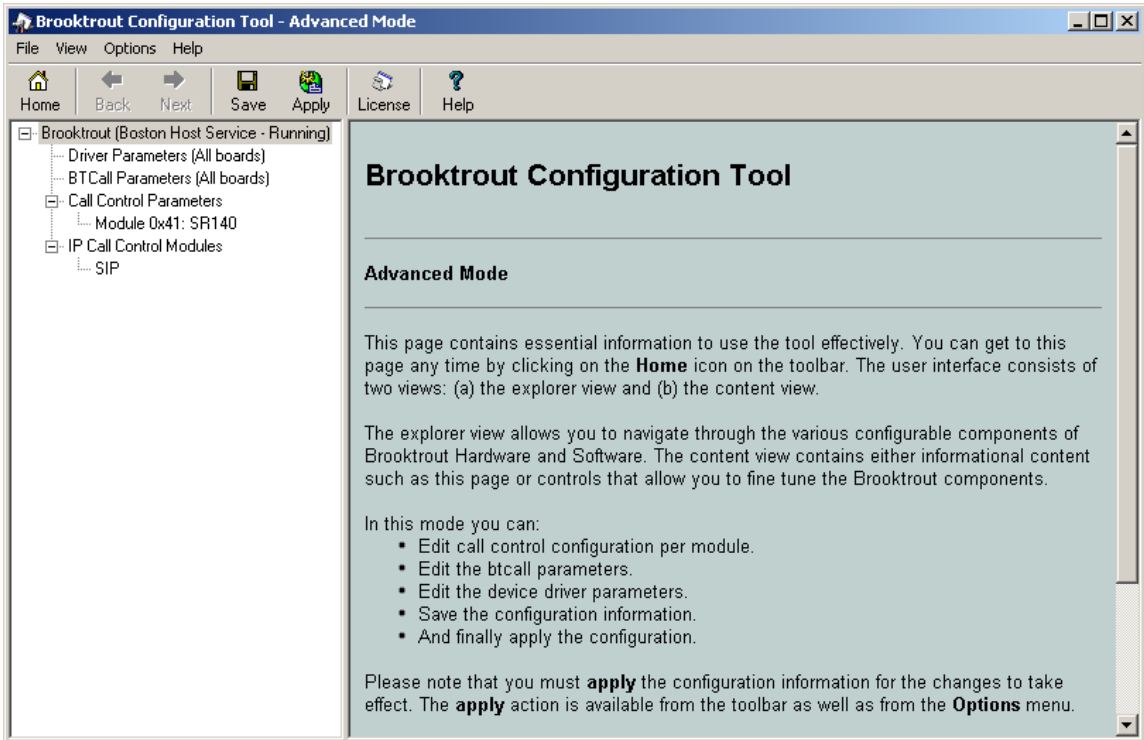
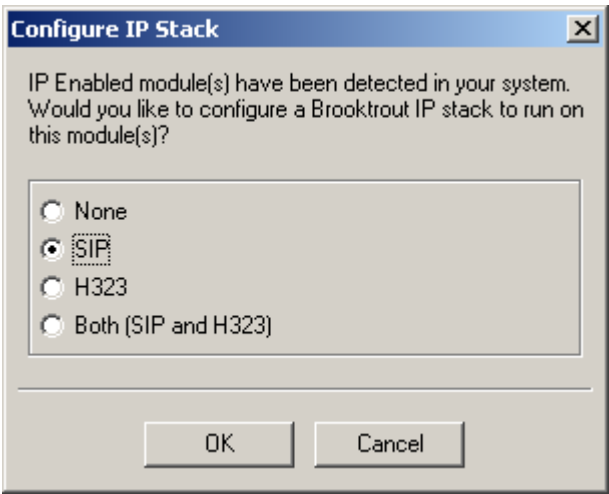
The examples shown in this section refer to Site 2 in **Figure 1**. Similar steps also apply to Site 1 using values appropriate for that location.

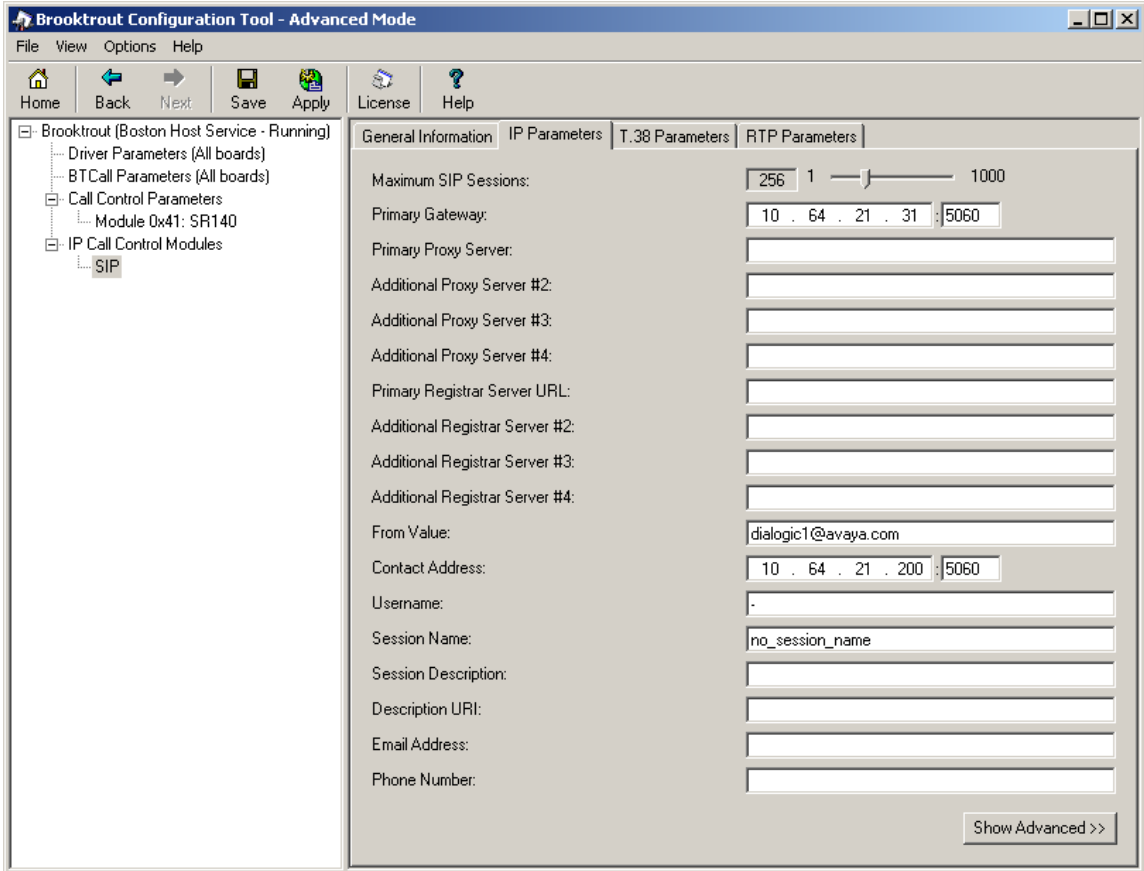
### 7.1. Steps to Configure Dialogic Brooktrout SR140 Fax Software

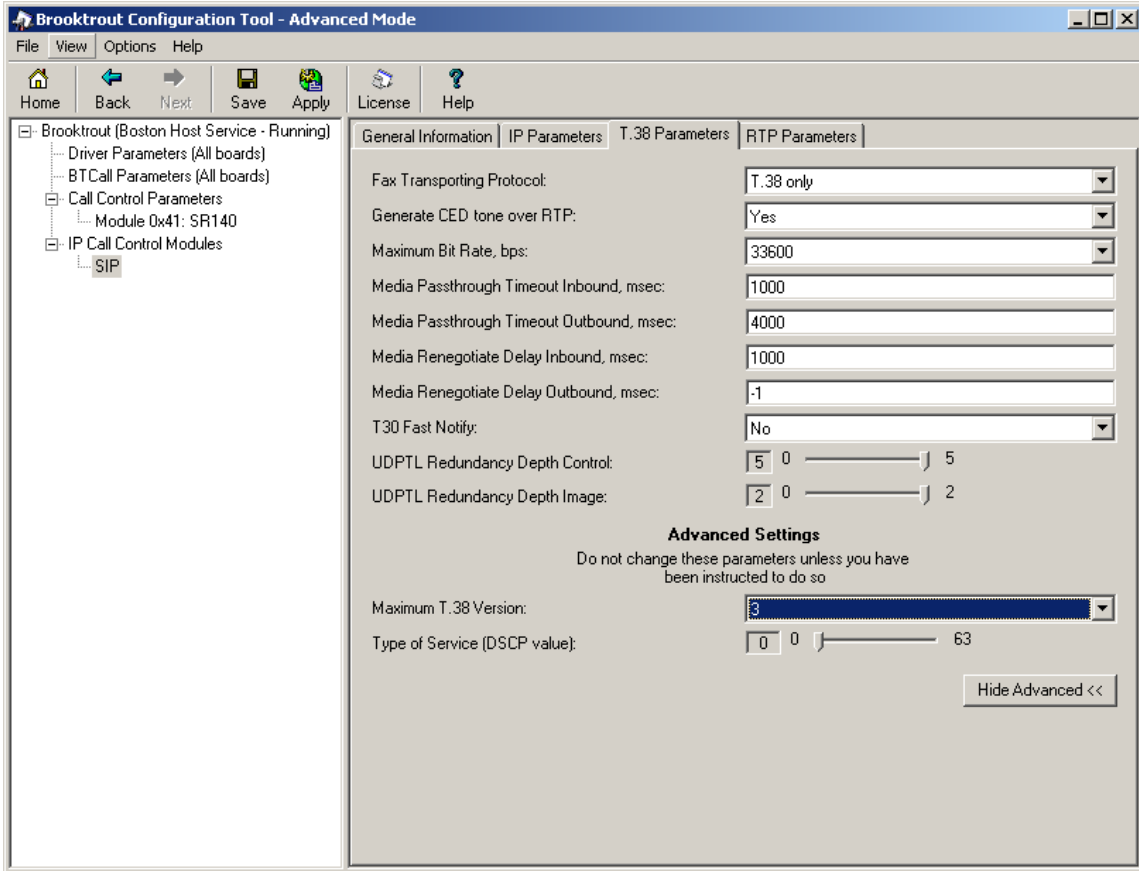
The configuration procedures covered in this section include the following:

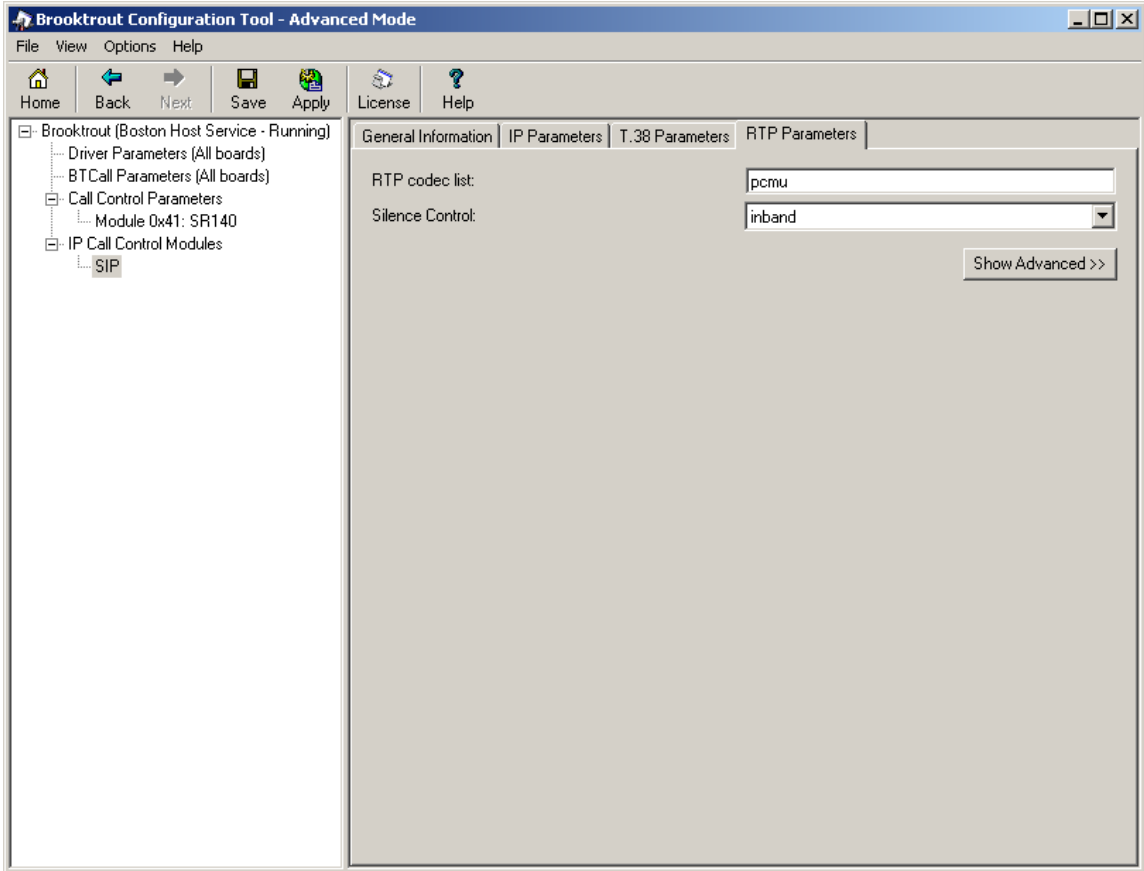
- Launch Brooktrout Configuration Tool (Step 1)
- Configure IP Stack (Step 2)
- Configure IP Parameters (Step 3)
- Configure T.38 Parameters (Step 4)
- Complete RTP Ports (Steps 5 and 6)

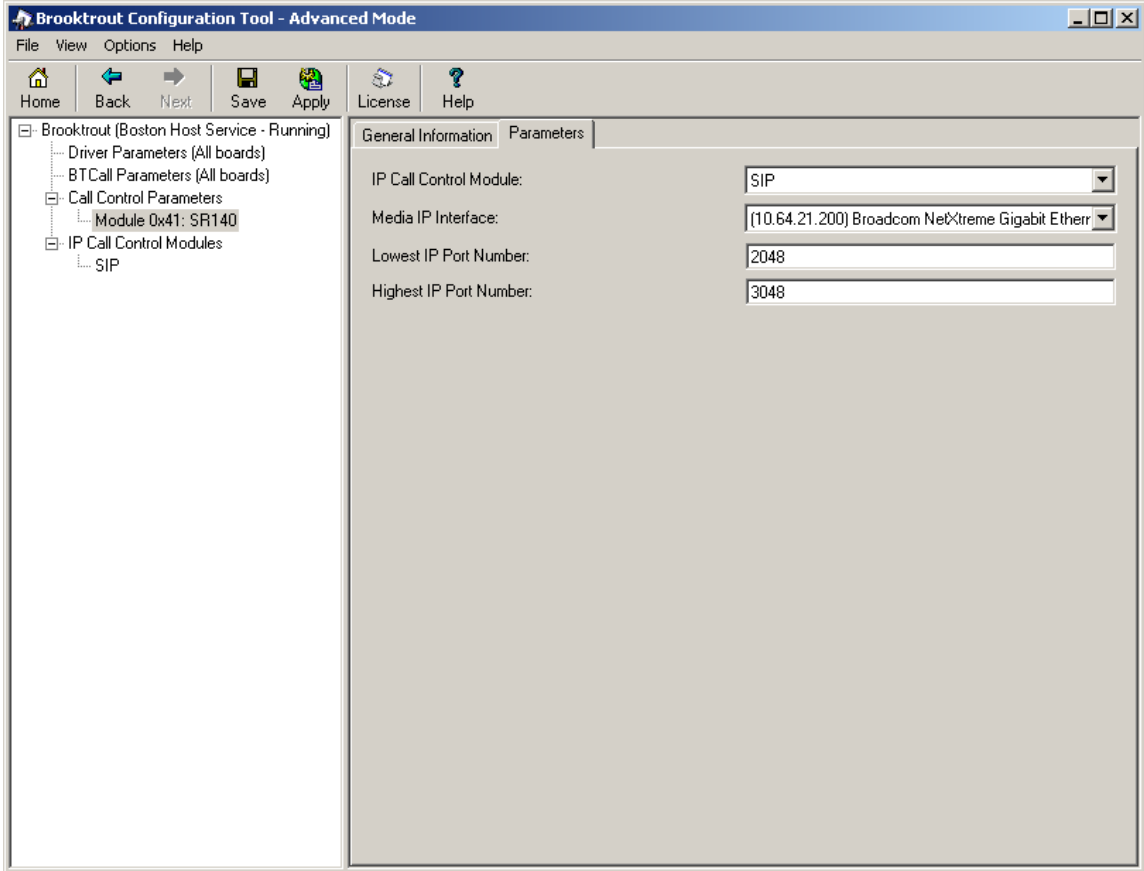
Step	Description
1.	<p><b>Launch Brooktrout Configuration Tool</b></p> <p>Navigate to the path of the Brooktrout configuration tool (i.e. <b>configtool.exe</b>) and launch the tool. The <b>Brooktrout Configuration Tool – Wizard Mode</b> window gets displayed. Click the <b>Advanced Mode</b> button on the bottom left.</p> 

Step	Description
2.	<p><b>Configure IP Stack</b> The following configuration tool window is displayed.</p>  <p>Select <b>Options</b> → <b>Configure IP Stack</b> from the top menu. The screen below is displayed. Select <b>SIP</b> and click <b>OK</b>.</p> 

Step	Description
3.	<p data-bbox="293 184 698 220"><b>Configure SIP IP Parameters</b></p> <p data-bbox="293 258 1430 436"><i><b>Important:</b> This step describes configuring the Primary SIP Gateway address using the Brooktrout Configuration Tool. This method is sufficient if the fax server will communicate with a single SIP gateway. Refer to the Dialogic Brooktrout SR140 Fax Software documentation for configuration details if the fax server will communicate with multiple SIP gateways.</i></p> <p data-bbox="293 474 1414 583">From the pane on the left, navigate to <b>Brooktrout → IP Call Control Modules → SIP</b> in the left navigation menu. Select the <b>IP Parameters</b> tab in the right pane. Configure the fields as follows:</p> <ul data-bbox="342 621 1406 926" style="list-style-type: none"> <li>• <b>Primary Gateway</b> –set to the IP address of Session Manager, and port number <b>5060</b>.</li> <li>• <b>From Value</b> – set to a desired value using the appropriate format (i.e. <b>UserInfo@DomainName</b>). The <i>DomainName</i> should be set to the authoritative domain as configured in Session Manager.</li> <li>• <b>Contact Address</b> – set to the IP address assigned to the fax server and port number <b>5060</b>.</li> <li>• <b>Username</b> – Required. Default value is a dash (‘-’) character.</li> </ul> <p data-bbox="293 963 776 999">Use default values for all other fields.</p> 
MJH; Reviewed: SPOC 3/26/2012	<p data-bbox="527 1896 1120 1969">Solution &amp; Interoperability Test Lab Application Notes ©2012 Avaya Inc. All Rights Reserved.</p> <p data-bbox="1279 1896 1446 1969">28 of 34 DialogicSMSIP</p>

Step	Description
4.	<p><b>Configure T.38 Parameters</b>  Select the <b>T.38 Parameters</b> tab. The screenshot below shows the values used during compliance testing.</p>  <p>The screenshot displays the 'Brooktrout Configuration Tool - Advanced Mode' window. The left-hand tree view shows the configuration hierarchy: 'Brooktrout (Boston Host Service - Running)' &gt; 'IP Call Control Modules' &gt; 'SIP'. The right-hand pane is titled 'T.38 Parameters' and contains the following settings:</p> <ul style="list-style-type: none"> <li>Fax Transporting Protocol: T.38 only</li> <li>Generate CED tone over RTP: Yes</li> <li>Maximum Bit Rate, bps: 33600</li> <li>Media Passthrough Timeout Inbound, msec: 1000</li> <li>Media Passthrough Timeout Outbound, msec: 4000</li> <li>Media Renegotiate Delay Inbound, msec: 1000</li> <li>Media Renegotiate Delay Outbound, msec: -1</li> <li>T30 Fast Notify: No</li> <li>UDPTL Redundancy Depth Control: 5</li> <li>UDPTL Redundancy Depth Image: 2</li> <li>Maximum T.38 Version: 3</li> <li>Type of Service (DSCP value): 0</li> </ul> <p>An 'Advanced Settings' section is also visible, with a warning: 'Do not change these parameters unless you have been instructed to do so'. A 'Hide Advanced &lt;&lt;' button is located at the bottom right of the configuration pane.</p>

Step	Description
5.	<p><b>Configure RTP Parameters</b></p> <p>Select the <b>RTP Parameters</b> tab. Set the <b>RTP codec list</b> value to use only a single codec, either <i>pcmu</i> or <i>pcma</i> to match the codec used in your region.</p>  <p>The screenshot shows the 'Brooktrout Configuration Tool - Advanced Mode' window. The left sidebar contains a tree view with the following structure: 'Brooktrout (Boston Host Service - Running)' expanded, showing 'Driver Parameters (All boards)', 'BtCall Parameters (All boards)', 'Call Control Parameters' (expanded), 'Module 0x41: SR140', and 'IP Call Control Modules' (expanded). Under 'IP Call Control Modules', 'SIP' is selected. The main panel has tabs for 'General Information', 'IP Parameters', 'T.38 Parameters', and 'RTP Parameters'. The 'RTP Parameters' tab is active, showing 'RTP codec list' set to 'pcmu' and 'Silence Control' set to 'inband'. A 'Show Advanced &gt;&gt;' button is visible at the bottom right of the main panel.</p>

Step	Description
6.	<p><b>Configure RTP Port Range</b>  From the pane on the left, navigate to <b>Call Control Parameters → Module 0x41: SR140</b>.</p> <p>Select the <b>Parameters</b> tabs. Configure the <b>Lowest IP Port Number</b> and <b>Highest IP Port Number</b> values to match the <b>UDP Port Min</b> and <b>UDP Port Max</b> values in the <b>IP Network Region</b> configuration screen in Communication Manager.</p> <p><i>Note: The Communication Manager default port range is 2048 to 3329; however, the Brooktrout Configuration Tool range only spans 1000 ports. If Lowest IP Port Number is set to 2048, the Highest Port Number should automatically be set to 3048.</i></p> 

Step	Description
7.	<p><b>Complete Brooktrout SR140 Configuration</b></p> <p>After verifying all the above parameters are properly set, click <b>Save</b> in the button menu and exit the Brooktrout Configuration Tool.</p> <p>From Windows explorer, navigate to the path of the Brooktrout call control configuration file (i.e. <b>callctrl.cfg</b>). Open the <b>callctrl.cfg</b> file and verify the following (making any edits as necessary):</p> <ul style="list-style-type: none"> <li>Verify that the following configuration segment is present; and that the <b>rtp_codec</b> value under the <b>[host_module.1/rtp]</b> header matches the value specified in <b>Step 5</b> above, either “pcmu” or “pcma”. (Note, . . . below indicates other entries under the header).</li> </ul> <pre data-bbox="391 663 1179 806">[host_module.1/rtp] ... rtp_codec=pcmu ...</pre> <ul style="list-style-type: none"> <li>Verify that <b>rtp_ced_enable</b> is set to <b>true</b> under the <b>[host_module.1/t.38parameters]</b> header. (Note, . . . below indicates other entries under the header).</li> </ul> <pre data-bbox="391 976 1179 1117">[host_module.1/t.38parameters] ... rtp_ced_enable=true ...</pre> <p>After making and saving any edits in the <b>callctrl.cfg</b> file, restart the fax server.</p>



## 8. Verification Steps

The following steps may be used to verify the configuration:

- From Communication Manager SAT, use the:
  - **status signaling-group** to verify the signaling group to the fax server is in-service.
  - **status trunk-group** command to verify the trunk group to fax server is in-service.
  - **list trace tac** command to verify that fax calls are routed over the expected trunks.
- From System Manager, confirm that the Entity Link between Session Manager and the fax server is in service.
- Verify fax calls can be placed to/from the fax server.

## 9. Conclusion

These Application Notes describe the procedures for configuring Dialogic Brooktrout SR140 Fax Software with Avaya Aura® Communication Manager and Avaya Aura® Session Manager using a SIP trunk interface. Dialogic Brooktrout SR140 Fax Software successfully passed compliance testing.

## 10. Additional References

This section provides references to the product documentation relevant to these Application Notes. Avaya product documentation may be found at <http://support.avaya.com>.

- [1] *Avaya Aura™ Communication Manager Feature Description and Implementation*, Doc # 555-245-205, Release 6.0, Issue 8.0, June, 2010.
- [2] *Administering Avaya Aura™ Communication Manager*, Doc # 03-300509, Release 6.0, Issue 6.0, June, 2010.
- [3] *Administering Avaya Aura® Session Manager*, Doc # 03-603324, Release 6.1, Issue 1.1, November, 2010.
- [4] Dialogic Brooktrout SR140 Fax Software documentation may be found out <http://www.dialogic.com/en/Products/fax-boards-and-software/foip/sr140.aspx>.

---

**©2012 Avaya Inc. All Rights Reserved.**

Avaya and the Avaya Logo are trademarks of Avaya Inc. All trademarks identified by ® and ™ are registered trademarks or trademarks, respectively, of Avaya Inc. All other trademarks are the property of their respective owners. The information provided in these Application Notes is subject to change without notice. The configurations, technical data, and recommendations provided in these Application Notes are believed to be accurate and dependable, but are presented without express or implied warranty. Users are responsible for their application of any products specified in these Application Notes.

Please e-mail any questions or comments pertaining to these Application Notes along with the full title name and filename, located in the lower right corner, directly to the Avaya DevConnect Program at [devconnect@avaya.com](mailto:devconnect@avaya.com).