



Avaya Solution & Interoperability Test Lab

Application Notes for Plantronics Spokes Software and Plantronics Calisto 620 Wireless Speakerphone with Avaya one-X® Agent - Issue 1.0

Abstract

These Application Notes describe the configuration steps required to integrate the Plantronics Spokes Software and Plantronics Calisto 620 Wireless Speakerphone with Avaya one-X® Agent. Plantronics Spokes Software enables the integrated call control features for Calisto 620, including call answer/end and synchronized mute with Avaya one-X® Agent. Calisto 620 uses Bluetooth USB adapter to connect to the PC running Avaya one-X® Agent

Information in these Application Notes has been obtained through DevConnect compliance testing and additional technical discussions. Testing was conducted via the DevConnect Program at the Avaya Solution and Interoperability Test Lab.

1. Introduction

These Application Notes describe the configuration steps required to integrate the Plantronics Spokes Software and Plantronics Calisto 620 Wireless Speakerphone with Avaya one-X® Agent. Plantronics Spokes Software enables the integrated call control features for Calisto 620, including call answer/end and synchronized mute with Avaya one-X® Agent. Calisto 620 uses Bluetooth USB adapter to connect to the PC running Avaya one-X® Agent.

Refer to the appropriate Plantronics documentation listed in **Section 12** for additional product information.

2. General Test Approach

Avaya's formal testing and Declaration of Conformity is provided only on the headsets/handsets that carry the Avaya brand or logo. Avaya may conduct testing of non-Avaya headset/handset to determine interoperability with Avaya phones. However, Avaya does not conduct the testing of non-Avaya headsets/handsets for: Acoustic Pressure, Safety, Hearing Aid Compliance, EMC regulations, or any other tests to ensure conformity with safety, audio quality, long-term reliability or any regulation requirements. As a result, Avaya makes no representations whether a particular non-Avaya headset will work with Avaya's telephones or with a different generation of the same Avaya telephone.

Since there is no industry standard for handset interfaces, different manufacturers utilize different handset/headset interfaces with their telephones. Therefore, any claim made by a headset vendor that its product is compatible with Avaya telephones does not equate to a guarantee that the headset will provide adequate safety protection or audio quality.

The interoperability compliance test included feature and serviceability testing. The feature testing focused on placing calls to and from Avaya one-X® Agent using the Plantronics Spokes Software and Plantronics Calisto 620 Wireless Speakerphone and verifying 2-way audio. The type of calls made included calls to voicemail, to local stations, and to the PSTN.

The serviceability testing focused on verifying the usability of the Calisto 620 after restarting the one-X Agent, disconnecting and reconnecting the speakerphone, and rebooting the PC.

2.1. Interoperability Compliance Testing

All test cases were performed manually. The following features were verified:

- Placing calls to the voicemail system. Voice messages were recorded and played back to verify that the playback volume and recording level were good.
- Placing calls to local stations to verify two-way audio.
- Placing calls to the PSTN to verify two-way audio.
- Answering and ending calls using the call control button on the speakerphone.
- Using the volume control buttons on the speakerphone to adjust the playback volume.
- Using the mute button on the speakerphone and on one-X Agent to mute and un-mute the audio, including verifying that the mute status was accurately reflected on the speakerphone and one-X Agent.

For the serviceability testing, the speakerphone was disconnected and reconnected to verify proper operation. The one-X Agent application was also restarted for the same purpose. The desktop PC was also rebooted to verify that one-X Agent and speakerphone were operational when the PC came back into service.

3. Test Results

All test cases passed.

4. Support

For technical support and information on Plantronics Spokes Software and Plantronics Calisto 620 Wireless Speakerphone, contact Plantronics at:

- Phone: 800-544-4660 (toll free)
+1 831-426-5858 (International)
- Website: http://www.plantronics.com/north_america/en_US/support/

5. Reference Configuration

Figure 1 illustrates the test configuration used to verify the Plantronics solution. The configuration consists of an Avaya S8300 Server running Avaya Aura® Communication Manager with an Avaya G450 Media Gateway providing connectivity to the PSTN via an ISDN-PRI trunk (not shown). Avaya Aura® Communication Manager Messaging was used as the voicemail system. Avaya one-X® Agent and Plantronics Spokes Software were installed on a desktop PC. Plantronics Calisto 620 was connected to the desktop PC using a Plantronics Bluetooth USB adapter.

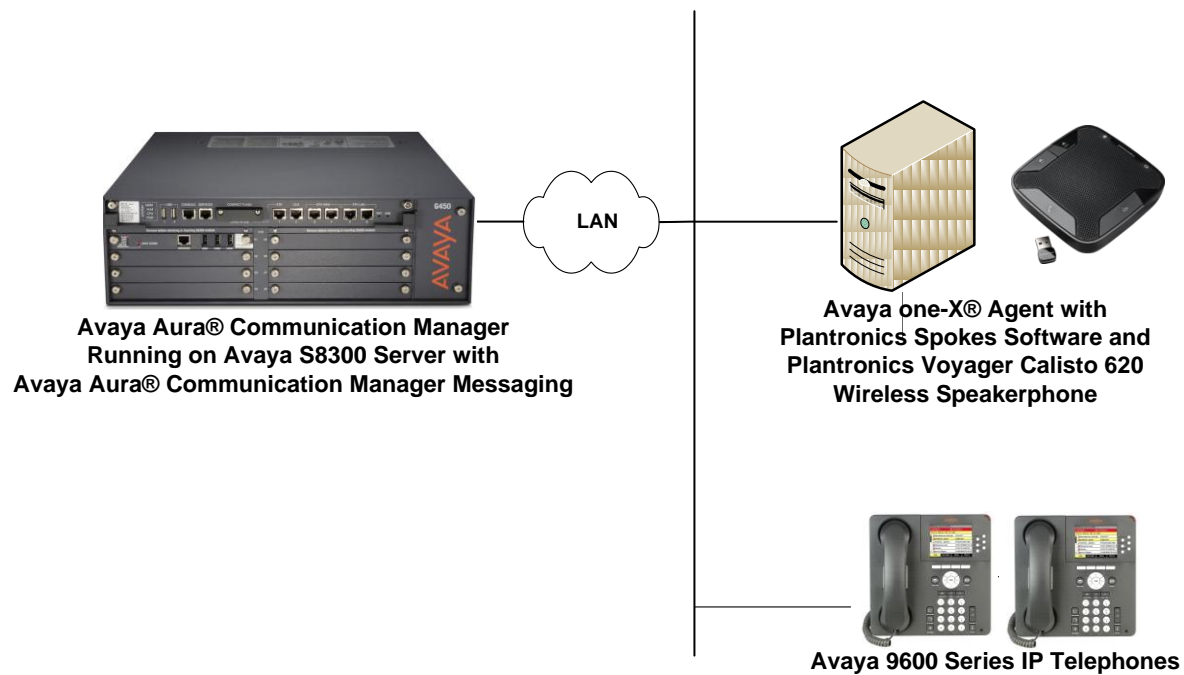


Figure 1: Avaya one-X® Agent with Plantronics Spokes Software and Plantronics Calisto 620 Wireless Speakerphone

6. Equipment and Software Validated

The following equipment and software were used for the sample configuration provided:

Equipment	Software
Avaya S8300 Server with a G450 Media Gateway and Avaya Aura® Communication Manager Messaging	6.2 SP 5 (R016x.02.0.823.0 with Patch 20396)
Avaya one-X® Agent on Microsoft Windows XP	2.5 SP 1 (2.5.1072.11103)
Avaya 9600 Series IP Telephone	3.1 SP 5 (H.323)
Plantronics Spokes Software	2.8.24304.0
Plantronics Calisto 620 (Standard)	USB Firmware 920, USB Adapter 04.70, Headset 02.00

7. Configure Avaya Aura® Communication Manager

This section covers the station configuration for one-X Agent. The configuration is performed via the System Access Terminal (SAT) on Communication Manager.


Use the **add station** command to create a station for one-X Agent. Set the **Type** field to the station type to be emulated. In this example, 9630 was used. Set the **Port** field to *IP* and configure a **Security Code** as that password to be used by one-X Agent to log in. Set the **IP Softphone** field to *y*.

add station 40003		Page 1 of 5
STATION		
Extension: 40003	Lock Messages? n	BCC: 0
Type: 9630	Security Code: 40003	TN: 1
Port: IP	Coverage Path 1:	COR: 1
Name: Plantronics	Coverage Path 2:	COS: 1
	Hunt-to Station:	
STATION OPTIONS		
Location:	Time of Day Lock Table:	
Loss Group: 19	Personalized Ringing Pattern: 1	
	Message Lamp Ext: 40003	
Speakerphone: 2-way	Mute Button Enabled? y	
Display Language: english	Button Modules: 0	
Survivable GK Node Name:		
Survivable COR: internal	Media Complex Ext:	
Survivable Trunk Dest? y	IP SoftPhone? Y	
	IP Video Softphone? n	
	Short/Prefixed Registration Allowed: default	
	Customizable Labels? y	

On **Page 4** of the Station form, configure the additional feature buttons in bold, which are used by one-X Agent to log in as an Automatic Call Distribution (ACD) agent.

add station 40003		Page 4 of 5
STATION		
SITE DATA		
Room:	Headset? n	
Jack:	Speaker? n	
Cable:	Mounting: d	
Floor:	Cord Length: 0	
Building:	Set Color:	
ABBREVIATED DIALING		
List1:	List2:	List3:
BUTTON ASSIGNMENTS		
1: call-appr	5: manual-in	Grp:
2: call-appr	6: after-call	Grp:
3: call-appr	7: aux-work	RC: Grp:
4: auto-in	8: release	
voice-mail		


8. Configure Avaya one-X® Agent

After logging into one-X Agent, click on  and then select **Agent Preferences** as shown below.




The Plantronics Calisto 620 is automatically detected by one-X Agent. In the **Agent Preferences** window, click on **Audio** and then select the **Advanced** tab. Set the **Playback Device** and **Record Device** fields to *Plantronics BT300C* as shown below. Click the **Background Noise Test** button to determine the normal background noise levels at the location.

Note: The Plantronics speakerphone must be connected to the PC prior to starting one-X Agent; otherwise, one-X Agent would not detect speakerphone.

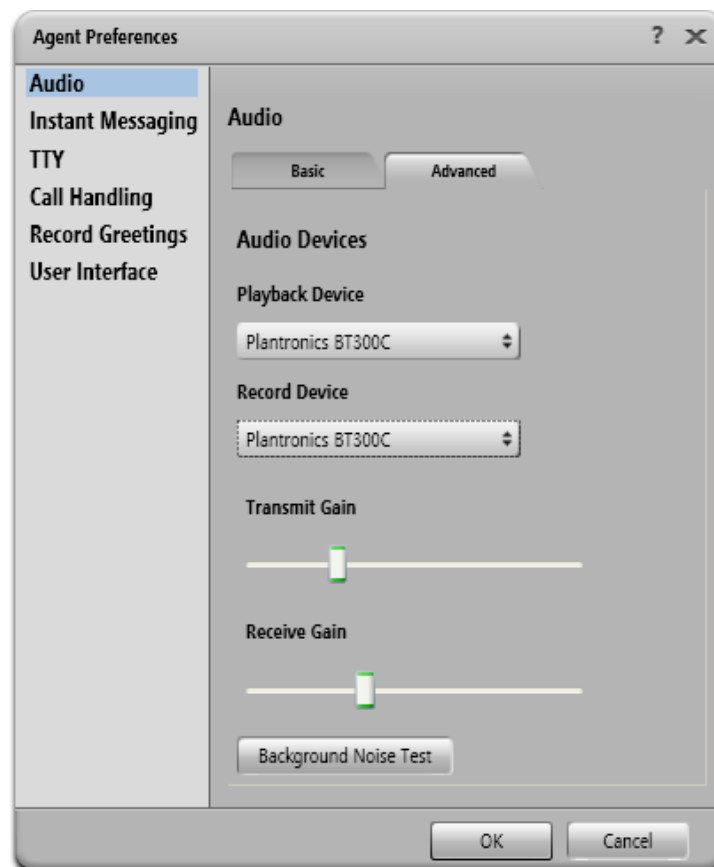

After clicking the **Background Noise Test** button, the following window is displayed. Click **Test**. Once the test is completed, click **Close**. Click **OK** in the **Audio** → **Advanced** tab and restart one-X Agent.

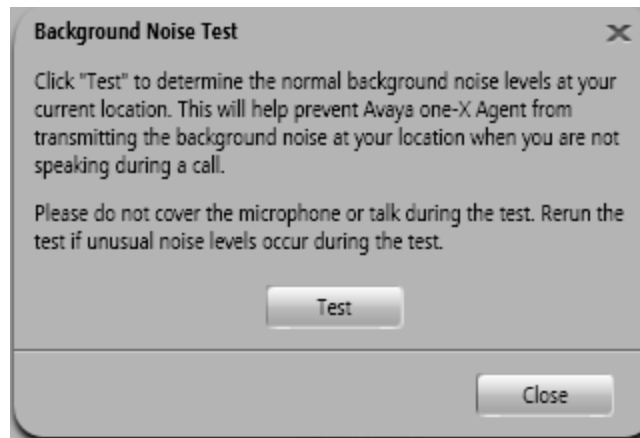

9. Install Plantronics Spokes Software and Plantronics Calisto 620

The Plantronics Spokes software enables the Plantronics Calisto 620 to answer, end, and mute calls using the call control button on the speakerphone. Install the software on the PC running the one-X Agent. Refer to [3] for additional information.

After the Spokes software is installed, connect the Plantronics Calisto 620 Bluetooth USB adapter to the desktop PC running one-X Agent and turn on the speakerphone. When the speakerphone is paired via Bluetooth, a chime should be heard and the Bluetooth LED on the speakerphone should blink blue once. If the speakerphone needs to be paired again, follow the instructions in [4].

10. Verification Steps

This section provides the tests that can be performed to verify proper installation and configuration of the Plantronics Spokes Software and Plantronics Calisto 620 with Avaya one-X® Agent.

1. Start the one-X Agent application.
2. Place an incoming call to one-X Agent from any local phone.
3. Answer the call using the call control button on the speakerphone.
4. Verify two-way talk path between the Calisto 620 and phone.
5. Disconnect the call from the speakerphone using the call control button.
6. Verify that the call is properly disconnected.

11. Conclusion

These Application Notes describe the configuration steps required to integrate the Plantronics Spokes Software and Plantronics Calisto 620 Wireless Speakerphone with Avaya one-X® Agent. All test cases were completed successfully.

12. Additional References

This section references the Avaya and Plantronics documentation that are relevant to these Application Notes.

The following Avaya product documentation can be found at <http://support.avaya.com>.

- [1] *Administering Avaya Aura® Communication Manager*, Release 6.2, Issue 7, December 2012, Document Number 03-300509.
- [2] *Using Avaya one-X® Agent 2.5*, June 2011.

The following Plantronics product documentation can be found at <http://www.plantronics.com>.

- [3] *Plantronics Spokes Software for Windows*, Build 2.8.24304.0.
- [4] *Plantronics Calisto 620 Bluetooth Wireless Speakerphone + Bluetooth USB Adapter Quick Start Guide*.

©2013 Avaya Inc. All Rights Reserved.

Avaya and the Avaya Logo are trademarks of Avaya Inc. All trademarks identified by ® and ™ are registered trademarks or trademarks, respectively, of Avaya Inc. All other trademarks are the property of their respective owners. The information provided in these Application Notes is subject to change without notice. The configurations, technical data, and recommendations provided in these Application Notes are believed to be accurate and dependable, but are presented without express or implied warranty. Users are responsible for their application of any products specified in these Application Notes.

Please e-mail any questions or comments pertaining to these Application Notes along with the full title name and filename, located in the lower right corner, directly to the Avaya DevConnect Program at devconnect@avaya.com.