



**Application Notes for Configuring Century Link SIP Trunking with Avaya Aura® Communication Manager 5.2.1 and Acme Packet 3800 Net-Net Session Border Controller – Issue 1.0**

**Abstract**

These Application Notes describe the steps to configure Session Initiation Protocol (SIP) Trunking between CenturyLink SIP Trunking service and an Avaya SIP-enabled enterprise solution. The Avaya solution consists of Avaya Aura® Communication Manager and an Acme Packet 3800 Net-Net Session Border Controller, along with various Avaya endpoints.

CenturyLink is a member of the Avaya DevConnect Service Provider program. Information in these Application Notes has been obtained through DevConnect compliance testing and additional technical discussions. Testing was conducted via the DevConnect Program at the Avaya Solution and Interoperability Test Lab.

# 1. Introduction

These Application Notes describe the steps required to configure Session Initiation Protocol (SIP) Trunking between CenturyLink SIP Trunking service and an Avaya SIP-enabled enterprise solution. The Avaya solution consists of Avaya Aura® Communication Manager and an Acme Packet 3800 Net-Net Session Border Controller (SBC), along with various Avaya endpoints.

Customers using this Avaya SIP-enabled enterprise solution with CenturyLink SIP Trunking are able to place and receive PSTN calls via a broadband IP WAN connection and the SIP protocol. This converged network solution is an alternative to traditional PSTN trunks such as ISDN-PRI.

## 2. General Test Approach and Test Results

The general test approach was to connect a simulated enterprise site to the CenturyLink SIP Trunking service via the public Internet and exercise the features and functionality listed in **Section 2.1**. The simulated enterprise site was comprised of Avaya Aura® Communication Manager, the Acme Packet 3800 Net-Net SBC, and various Avaya endpoints.

### 2.1. Interoperability Compliance Testing

To verify SIP trunking interoperability, the following features and functionality were covered during the interoperability compliance test:

- Response to SIP OPTIONS queries.
- Incoming PSTN calls to various phone types.  
Phone types included the H.323, digital, and analog telephones at the enterprise. Inbound PSTN calls were routed to the enterprise across the SIP trunk from the service provider.
- Outgoing PSTN calls from various phone types.  
Phone types included H.323, digital, and analog telephones at the enterprise. Outbound PSTN calls were routed from the enterprise across the SIP trunk to the service provider.
- Inbound and outbound PSTN calls to/from Avaya one-X® Communicator (soft client).  
Avaya one-X® Communicator supports two modes (Road Warrior and Telecommuter). Each supported mode was tested. Avaya one-X® Communicator also supports two Voice Over IP (VoIP) protocols: H.323 and SIP. Only the H.323 version of Communicator was tested.
- Various call types including: local, long distance, international, outbound toll-free, and operator (0).
- Codecs G.711MU and G.729A were tested but only codec G.711Mu is currently supported in the CenturyLink production environment.
- DTMF transmission using RFC 2833.
- Caller ID presentation and Caller ID restriction.
- Response to incomplete call attempts and trunk errors.
- Voicemail navigation for inbound and outbound calls.
- User features such as hold and resume, internal call forwarding, transfer, and conference.
- Off-net call forwarding and mobility (extension to cellular).

Items not supported or not tested included the following:

- Inbound toll-free and emergency calls are supported but were not tested.
- Operator assisted calls (0 + 10 digits) and local directory assistance are supported but were not tested due to limitations in the test environment.
- T.38 Fax is not supported.

## 2.2. Test Results

Interoperability testing of CenturyLink SIP Trunking was completed with successful results for all test cases with the exception of the observations/limitations described below.

- **No Error Indication if No Matching Codec Offered:** If the Communication Manager SIP trunk is improperly configured to have no matching codecs with the service provider and an outbound call is placed, the service provider only returns a “100 Trying” response and no error indication. As a result, Communication Manager cancels the call when the Alternate Route Timer expires (generally 6 seconds by default).
- **Calling Party Number (PSTN transfers):** The calling party number displayed on the PSTN phone is not updated to reflect the true connected party on calls that are transferred to the PSTN. After the call transfer is complete, the calling party number displays the number of the transferring party and not the actual connected party. The PSTN phone display is ultimately controlled by the PSTN provider, thus this behavior is not necessarily indicative of a limitation of the combined Avaya/CenturyLink solution. It is listed here simply as an observation.
- **Asynchronous DTMF payload header values are not supported:** CenturyLink does not support the use of a different DTMF payload header value in each direction of a single call. This may occur if the media is re-directed from Communication Manager to an endpoint, and the endpoint wishes to use a different DTMF payload header value than was negotiated when the call was initially established. CenturyLink will send a re-INVITE to force the DTMF payload header value to be the same in each direction. In response, Communication Manager will send a re-INVITE to force the DTMF payload header value back to the original asynchronous values which allow the DTMF payload header value to be the same end-to-end in the same direction (even though the values are different in each direction). These re-INVITES continue for several minutes before one side gives up and tears down the call. This issue manifested itself in two separate call scenarios during the compliance test as described in these Application Notes. This issue may occur in other call scenarios that were not tested.

## 2.3. Support

For technical support on CenturyLink SIP Trunking, contact CenturyLink using the **Support→Contact Us** links at [www.centurylink.com](http://www.centurylink.com) or by calling business customer support at 1-800-201-4102.

Avaya customers may obtain documentation and support for Avaya products by visiting <http://support.avaya.com>. Selecting the **Support Contact Options** link followed by **Maintenance Support** provides the worldwide support directory for Avaya Global Services. Specific numbers are provided for both customers and partners based on the specific type of support or consultation services needed. Some services may require specific Avaya service

support agreements. Alternatively, in the United States, the phone number (866) GO-AVAYA (866-462-8292) provides access to overall sales and service support menus.

### 3. Reference Configuration


**Figure 1** illustrates a sample Avaya SIP-enabled enterprise solution connected to CenturyLink SIP Trunking. This is the configuration used for compliance testing.

The Avaya components used to create the simulated customer site included:

- Avaya S8800 Server running Avaya Aura® Communication Manager
- Avaya G650 Media Gateway
- Avaya 9600-Series IP telephones (H.323)
- Avaya 4600-Series IP telephones (H.323)
- Avaya one-X® Communicator (H.323)
- Avaya digital and analog telephones

Located at the edge of the enterprise is the Acme Packet 3800 Net-Net Session Director (SBC). It has a public side that connects to the external service provider network and a private side that connects to the enterprise network. All SIP and RTP traffic entering or leaving the enterprise flow through the SBC. In this way, the SBC can protect the enterprise against any SIP-based attacks. The SBC provides network address translation at both the IP and SIP layers.

For security reasons, any actual public IP addresses used in the configuration have been replaced with private IP addresses throughout this document. Similarly, any references to real routable PSTN numbers have also been changed to numbers that cannot be routed by the PSTN.

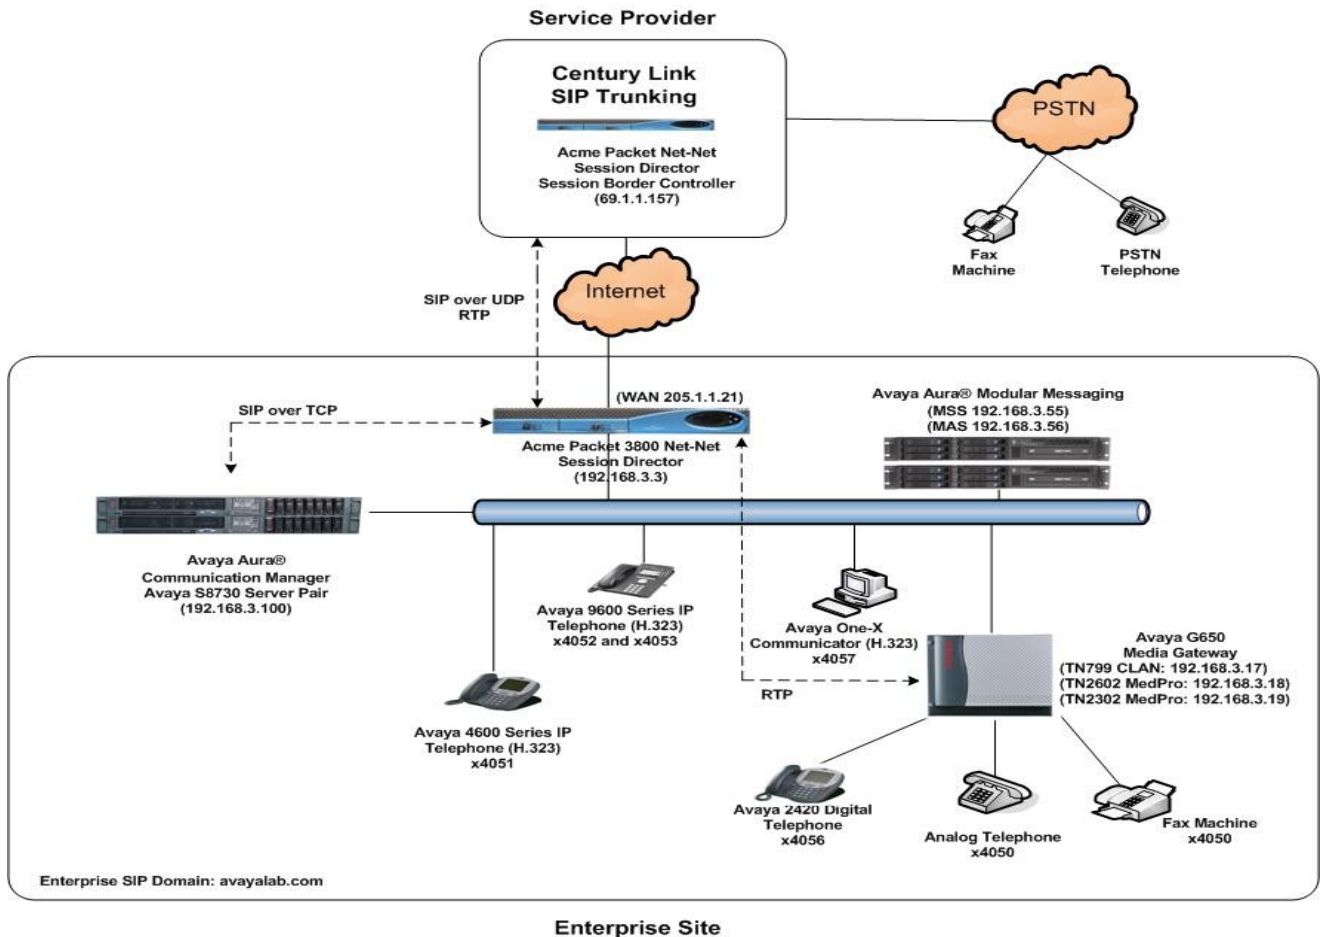

**Figure 1: Avaya IP Telephony Network using CenturyLink SIP Trunking**

A separate trunk was created between Avaya Aura® Communication Manager and the SBC to carry the service provider traffic. This was done so that any trunk or codec setting required by the service provider could be applied only to this trunk and not affect other enterprise SIP traffic. In addition, this trunk carried both inbound and outbound traffic.

For inbound calls, the calls flow from the service provider network to the SBC and then to Avaya Aura® Communication Manager. Once the call arrives at Communication Manager further incoming call treatment, such as incoming digit translations and class of service restrictions, may be performed.

Outbound calls to the PSTN are first processed by Communication Manager and may be subject to outbound features such as automatic route selection, digit manipulation and class of service restrictions. Once Communication Manager selects the proper SIP trunk, the call is routed to the SBC. From the SBC, any necessary Header Manipulations are executed and the call is sent to the CenturyLink SIP Trunking service.

For the compliance test, the enterprise sent 11 digits in the destination headers (e.g., Request-URI and To) and sent 10 digits in the source headers (e.g., From, Contact, and P-Asserted-Identity). CenturyLink sent 10 digits in both the source and destination headers.

## 4. Equipment and Software Validated

The following equipment and software were used for the sample configuration:

Avaya IP Telephony Solution Components	
Component	Release
Avaya Aura® Communication Manager running on Avaya S8730 Servers (HA Pair)	5.2.1 (R015x.02.1.016.4-18365)
Avaya G650 Media Gateway <ul style="list-style-type: none"><li>• IPSI</li><li>• CLAN</li><li>• MedPro TN2302</li><li>• MedPro TN2602</li></ul>	HW28, FW047 HW01, FW024 HW18, FW110 HW08, FW044
Avaya 4610SW IP Telephone (H.323)	Avaya one-X® Deskphone Edition 3.1.1
Avaya 9620 IP Telephone (H.323)	Avaya one-X® Deskphone Edition 3.1.1
Avaya 9630 IP Telephone (H.323)	Avaya one-X® Deskphone Edition 3.1.1
Avaya one-X® Communicator (H.323)	6.0.0.26
Avaya 2420 Digital Telephone	n/a
Avaya Analog Telephone	n/a
Acme Packet 3800 Net-Net Session Border Controller	SCX6.2.0 M3P3 GA
CenturyLink SIP Trunking Solution Components	
Component	Release
Acme Packet Net-Net Session Border Controller	6.1
BroadSoft Softswitch	R16 sp1
Sonus Media Gateway	V07.02.05R000

**Table 1: Equipment and Software Tested**

The specific configuration above was used for the compliance testing. Note that this solution will be compatible with other Avaya Server and Media Gateway platforms running similar versions of Avaya Aura® Communication Manager.

## 5. Configure Avaya Aura® Communication Manager

This section describes the procedure for configuring Avaya Aura® Communication Manager for CenturyLink SIP Trunking. A SIP trunk is established between Avaya Aura® Communication Manager and the enterprise SBC for use by signaling traffic to and from CenturyLink. It is assumed that the basic installation tasks for Avaya Aura® Communication Manager, the Avaya

G650 Media Gateway, and the Acme Packet enterprise SBC have been previously completed and are not discussed here.

The Avaya Aura® Communication Manager configuration was performed using the System Access Terminal (SAT). Some screens in this section have been abridged and highlighted for brevity and clarity in presentation. Note that the IP addresses and phone numbers shown throughout these Application Notes have been edited so that the actual public IP addresses of the network elements and public PSTN numbers are not revealed.

## 5.1. Licensing and Capacity

Use the **display system-parameters customer-options** command to verify that the **Maximum Administered SIP Trunks** value on **Page 2** is sufficient to support the desired number of simultaneous SIP calls across all SIP trunks at the enterprise including any trunks to the service provider. The example shows that 1000 SIP trunks are available and 353 are in use. The license file installed on the system controls the maximum values for these attributes. If a required feature is not enabled or there is insufficient capacity, contact an authorized Avaya sales representative to add additional capacity.

```
display system-parameters customer-options                               Page 2 of 10
                                OPTIONAL FEATURES

IP PORT CAPACITIES                                                    USED
      Maximum Administered H.323 Trunks: 1000 30
      Maximum Concurrently Registered IP Stations: 18000 3
      Maximum Administered Remote Office Trunks: 0 0
Maximum Concurrently Registered Remote Office Stations: 0 0
      Maximum Concurrently Registered IP eCons: 0 0
      Max Concur Registered Unauthenticated H.323 Stations: 0 0
      Maximum Video Capable H.323 Stations: 0 0
      Maximum Video Capable IP Softphones: 0 0
      Maximum Administered SIP Trunks: 1000 353
      Maximum Administered Ad-hoc Video Conferencing Ports: 0 0
      Maximum Number of DS1 Boards with Echo Cancellation: 0 0
      Maximum TN2501 VAL Boards: 128 0
      Maximum Media Gateway VAL Sources: 0 0
      Maximum TN2602 Boards with 80 VoIP Channels: 128 0
      Maximum TN2602 Boards with 320 VoIP Channels: 128 1
      Maximum Number of Expanded Meet-me Conference Ports: 0 0

(NOTE: You must logoff & login to effect the permission changes.)
```

## 5.2. System Features

Use the **change system-parameters feature** command to set the **Trunk-to-Trunk Transfer** field to **all** to allow incoming calls from the PSTN to be transferred to another PSTN endpoint. If for security reasons, incoming calls should not be allowed to transfer back to the PSTN then leave the field set to **none**.

```
change system-parameters features                               Page 1 of 19
                    FEATURE-RELATED SYSTEM PARAMETERS
                    Self Station Display Enabled? n
                    Trunk-to-Trunk Transfer: all
                    Automatic Callback with Called Party Queuing? n
Automatic Callback - No Answer Timeout Interval (rings): 3
                    Call Park Timeout Interval (minutes): 10
Off-Premises Tone Detect Timeout Interval (seconds): 20
                    AAR/ARS Dial Tone Required? y
```

On **Page 9**, verify that a text string has been defined to replace the Calling Party Number (CPN) for restricted or unavailable calls. This text string is entered in the two fields highlighted below. The compliance test used the value of **anonymous** for both.

```
change system-parameters features                               Page 9 of 18
                    FEATURE-RELATED SYSTEM PARAMETERS

CPN/ANI/ICLID PARAMETERS
    CPN/ANI/ICLID Replacement for Restricted Calls: anonymous
    CPN/ANI/ICLID Replacement for Unavailable Calls: anonymous

DISPLAY TEXT
                    Identity When Bridging: principal
                    User Guidance Display? n
    Extension only label for Team button on 96xx H.323 terminals? n

INTERNATIONAL CALL ROUTING PARAMETERS
    Local Country Code:
    International Access Code:

ENBLOC DIALING PARAMETERS
    Enable Enbloc Dialing without ARS FAC? n

CALLER ID ON CALL WAITING PARAMETERS
    Caller ID on Call Waiting Delay Timer (msec): 200
```



### 5.3. IP Node Names

Use the **change node-names ip** command to verify that node names have been previously defined for the IP addresses of the CLAN card in the Avaya G650 gateway (**clan1**, which is the IP address that IP phones will register with) and for the inside IP address of the enterprise SBC (**Acme**). These node names will be needed for defining the service provider signaling group in **Section 5.6**.

```
change node-names ip                                     Page 1 of 2
```

IP NODE NAMES	
Name	IP Address
<b>Acme</b>	<b>192.169.3.3</b>
Gateway001	192.168.3.1
MM	192.168.3.56
<b>clan1</b>	<b>192.168.3.17</b>
default	0.0.0.0
medpro1	192.168.3.18
medpro2	192.168.3.19
procr	0.0.0.0

### 5.4. Codecs

Use the **change ip-codec-set** command to define a list of codecs to use for calls within the enterprise. For the compliance test, codecs **G.711MU** and **G.729A** were tested using **ip-codec-set 1**. To use these codecs, enter **G.711MU** and **G.729A** in the **Audio Codec** column of the table in order of preference. Default values can be used for all other fields.

```
change ip-codec-set 1                                     Page 1 of 2
```

IP Codec Set			
Codec Set: 1			
Audio Codec	Silence Suppression	Frames Per Pkt	Packet Size(ms)
<b>1: G.711MU</b>	n	2	20
<b>2: G.729A</b>	n	2	20

On **Page 2**, set the **Fax Mode** to **T.38-Standard** to support T.38 faxing *within* the enterprise.

```
change ip-codec-set 1                                     Page 2 of 2
```

IP Codec Set			
Allow Direct-IP Multimedia? n			
FAX	Mode	Redundancy	
	<b>t.38-standard</b>	0	
Modem	off	0	
TDD/TTY	US	3	
Clear-channel	n	0	Clear-channel n 0

Use the **change ip-codec-set** command to define a list of codecs to use for calls between the enterprise and the service provider. For the compliance test, codecs G.729A and G.711MU were tested using ip-codec-set 3. To use these codecs, enter **G.729A** and **G.711MU** in the **Audio Codec** column of the table in order of preference. Default values can be used for all other fields.

```
change ip-codec-set 3 Page 1 of 2

IP Codec Set

Codec Set: 3

Audio      Silence      Frames      Packet
Codec      Suppression  Per Pkt     Size (ms)
1: G.729A    n            2           20
2: G.711MU  n            2           20
```

On **Page 2**, set the **Fax Mode** to **off** since T.38 faxing is not currently supported by CenturyLink’s SIP Trunking service.

```
change ip-codec-set 3 Page 2 of 2

IP Codec Set

Allow Direct-IP Multimedia? n

FAX      Mode      Redundancy
off      off      0
Modem     off      0
TDD/TTY   US      3
```

## 5.5. IP Network Regions

Create an IP-Network-Region for devices within the enterprise. For the compliance test, IP-network-region 1 was chosen for the enterprise. Use the **change ip-network-region 1** command to configure region 1 with the following parameters:

- Set the **Authoritative Domain** field to match the SIP domain of the enterprise. In this configuration, the domain name is **avayalab.com**. This name appears in the “From” header of SIP messages originating from this IP region.
- Enter a descriptive name in the **Name** field. In this case **Enterprise** was used.
- Enable **IP-IP Direct Audio** (shuffling) to allow audio traffic to be sent directly between IP endpoints without using media resources in the Avaya Media Gateway. Set both **Intra-region** and **Inter-region IP-IP Direct Audio** to **yes**. This is the default setting. Shuffling can be further restricted at the trunk level on the Signaling Group form.
- Set the **Codec Set** field to the IP codec set defined for the enterprise in **Section 5.4**.
- Default values can be used for all other fields.

```

change ip-network-region 1                                     Page 1 of 19
                                                           IP NETWORK REGION

  Region: 1
Location: 1          Authoritative Domain: avayalab.com
  Name: Enterprise
MEDIA PARAMETERS
  Codec Set: 1
  UDP Port Min: 2048
  UDP Port Max: 3329
  Intra-region IP-IP Direct Audio: yes
  Inter-region IP-IP Direct Audio: yes
  IP Audio Hairpinning? n
DIFFSERV/TOS PARAMETERS
  Call Control PHB Value: 46
  Audio PHB Value: 46
  Video PHB Value: 26
  RTCP Reporting Enabled? y
  RTCP MONITOR SERVER PARAMETERS
  Use Default Server Parameters? y
802.1P/Q PARAMETERS
  Call Control 802.1p Priority: 6
  Audio 802.1p Priority: 6
  Video 802.1p Priority: 5
  AUDIO RESOURCE RESERVATION PARAMETERS
  RSVP Enabled? n
H.323 IP ENDPOINTS
  H.323 Link Bounce Recovery? y
  Idle Traffic Interval (sec): 20
  Keep-Alive Interval (sec): 5
  Keep-Alive Count: 5

```

On **Page 4**, define the IP codec set to be used for traffic between region 3 and region 1. Enter the desired IP codec set in the **codec set** column of the row with destination region (**dst rgn**) 3. Default values may be used for all other fields. The example below shows the settings used for the compliance test. It indicates that codec set 3 will be used for calls between region 3 (the service provider region) and region 1 (the rest of the enterprise). Creating this table entry for ip network region 1 will automatically create a complementary table entry on the ip network region 3 form for destination region 1. This complementary table entry can be viewed using the **display ip-network-region 3** command and navigating to **Page 4**.

```

change ip-network-region 1                                     Page 4 of 20
Inter Network Region Connection Management
Source Region: 1
dst codec direct WAN-BW-limits Video Intervening Dyn A G c
rgn set WAN Units Total Norm Prio Shr Regions CAC R L e
1 1
2
3 3 y NoLimit n t
4

```

Create a separate IP network region for the service provider trunk. This allows for separate codec or quality of service settings to be used (if necessary) for calls between the enterprise and the service provider versus calls within the enterprise or elsewhere. For the compliance test, IP-network-region 3 was chosen for the service provider trunk. Use the **change ip-network-region 3** command to configure region 3 with the following parameters:

- Set the **Authoritative Domain** field to match the SIP domain or IP address of the service providers SBC or SIP proxy. In this configuration, an IP address of the service provider SBC, **69.1.1.157**, was used. This appears in the Host portion of the “From” header of SIP messages originating from this IP region.

- Enter a descriptive name in the **Name** field. In this case **CenturyLink SIPT** was used.
- Enable **IP-IP Direct Audio** (shuffling) to allow audio traffic to be sent directly between IP endpoints without using media resources in the Avaya Media Gateway. Set both **Intra-region** and **Inter-region IP-IP Direct Audio** to **yes**. This is the default setting. Shuffling can be further restricted at the trunk level on the Signaling Group form.
- Set the **Codec Set** field to the IP codec set defined for calls between the enterprise and CenturyLink in **Section 5.4**.
- Default values can be used for all other fields.

```

change ip-network-region 3                                     Page 1 of 20

                                IP NETWORK REGION

Region: 3
Location:                               Authoritative Domain: 69.1.1.157
Name: CenturyLink SIPT
MEDIA PARAMETERS                                           Intra-region IP-IP Direct Audio: yes
Codec Set: 3                                               Inter-region IP-IP Direct Audio: yes
UDP Port Min: 2048                                         IP Audio Hairpinning? n
UDP Port Max: 3329
DIFFSERV/TOS PARAMETERS
Call Control PHB Value: 46
Audio PHB Value: 46
Video PHB Value: 26
802.1P/Q PARAMETERS
Call Control 802.1p Priority: 6
Audio 802.1p Priority: 6
Video 802.1p Priority: 5
                                AUDIO RESOURCE RESERVATION PARAMETERS
H.323 IP ENDPOINTS                                         RSVP Enabled? n
H.323 Link Bounce Recovery? y
Idle Traffic Interval (sec): 20
Keep-Alive Interval (sec): 5
Keep-Alive Count: 5

```

On **Page 4**, define the IP codec set to be used for traffic between region 3 and region 1. Enter the desired IP codec set in the **codec set** column of the row with destination region (**dst rgn**) 1. Default values may be used for all other fields. The example below shows the settings used for the compliance test. It indicates that codec set 3 will be used for calls between region 3 (the service provider region) and region 1 (the rest of the enterprise). Creating this table entry for ip network region 3 will automatically create a complementary table entry on the ip network region 1 form for destination region 3. This complementary table entry can be viewed using the **display ip-network-region 1** command and navigating to **Page 4**.

```

change ip-network-region 3                                     Page 4 of 20

Source Region: 3      Inter Network Region Connection Management      I      M
                                                                G      A      t
dst codec direct  WAN-BW-limits  Video      Intervening  Dyn  A  G  c
rgn set  WAN Units  Total Norm  Prio Shr Regions  CAC  R  L  e
1  3  y  NoLimit
2
3  3
                                                                all

```

## 5.6. Signaling Group

Use the **add signaling-group** command to create a signaling group between Communication Manager and the Acme Packet 3800 SBC for use by the service provider trunk. This signaling group is used for inbound and outbound calls between the service provider and the enterprise. For the compliance test, signaling group 7 was used for this purpose and was configured using the parameters highlighted below.

- Set the **Group Type** field to *sip*.
- Set the **Transport Method** to the recommended default value of *tls* (Transport Layer Security). For ease of troubleshooting during testing, the compliance test was conducted with the **Transport Method** set to *tcp*. The transport method specified here is used between the Communication Manager and the Acme Packet 3800 SBC.
- Set the **IMS Enabled** field to *n*.
- Set the **Near-end Listen Port** and **Far-end Listen Port** to a valid unused port which can be a random unused port or the default well-known port value. (For TLS, the well-known port value is 5061 and for TCP the well-known port value is 5060). The compliance test was conducted with the **Near-end Listen Port** and **Far-end Listen Port** set to *5060*.
- Set the **Near-end Node Name** to *clan1*. This node name maps to the IP address of the Communication Manager as defined in **Section 5.3**.
- Set the **Far-end Node Name** to *Acme*. This node name maps to the IP address of the Acme Packet 3800 SBC as defined in **Section 5.3**.
- Set the **Far-end Network Region** to the IP network region defined for the service provider in **Section 5.5**.
- Set the **Far-end Domain** to the IP address of the CenturyLink SBC.
- Set **Direct IP-IP Audio Connections** to *y*. This field will enable media shuffling on the SIP trunk associated with this signaling group allowing Communication Manager to redirect media traffic directly between the SIP trunk and the enterprise endpoint.
- Set the **DTMF over IP** field to *rtp-payload*. This value enables Communication Manager to send DTMF transmissions using RFC 2833.
- Set the **Alternate Route Timer** to *15*. This defines the number of seconds that Communication Manager will wait for a response (other than 100 Trying) to an outbound INVITE before selecting another route. If an alternate route is not defined, then the call is cancelled after this interval.
- Default values may be used for all other fields.

```
add signaling-group 7
```

```
SIGNALING GROUP
```

```
Group Number: 7          Group Type: sip
                          Transport Method: tcp
IMS Enabled? n

Near-end Node Name: clan1      Far-end Node Name: Acme
Near-end Listen Port: 5060     Far-end Listen Port: 5060
Far-end Network Region: 3
Far-end Domain: 69.1.1.157

Incoming Dialog Loopbacks: eliminate
                          Bypass If IP Threshold Exceeded? n
                          RFC 3389 Comfort Noise? n
DTMF over IP: rtp-payload     Direct IP-IP Audio Connections? y
Session Establishment Timer(min): 3
                          IP Audio Hairpinning? n
                          Enable Layer 3 Test? n
                          Direct IP-IP Early Media? n
H.323 Station Outgoing Direct Media? n
                          Alternate Route Timer(sec): 15
```

## 5.7. Trunk Group

Use the **add trunk-group** command to create a trunk group for the signaling group created in **Section 5.6**. For the compliance test, trunk group 7 was configured using the parameters highlighted below.

- Set the **Group Type** field to *sip*.
- Enter a descriptive name for the **Group Name**.
- Enter an available trunk access code (TAC) that is consistent with the existing dial plan in the **TAC** field.
- Set the **Service Type** field to *public-ntwrk*.
- Set the **Signaling Group** to the signaling group configured in the previous step.
- Set the **Number of Members** field to the number of trunk members in the SIP trunk group. This value determines how many simultaneous SIP calls can be supported.
- Default values were used for all other fields.

```
add trunk-group 7                                     Page 1 of 21
                                                    TRUNK GROUP
Group Number: 7                                     Group Type: sip          CDR Reports: y
  Group Name: CenturyLink                          COR: 1                  TN: 1           TAC: 107
  Direction: two-way                               Outgoing Display? n
  Dial Access? n                                   Night Service:
  Queue Length: 0
  Service Type: public-ntwrk                       Auth Code? n
                                                    Signaling Group: 7
                                                    Number of Members: 14
```

On **Page 2**, the **Redirect On OPTIM Failure** value is the amount of time (in milliseconds) that Communication Manager will wait for a response (other than 100 Trying) to a pending INVITE sent to an EC500 remote endpoint before selecting another route. If another route is not defined, then the call is cancelled after this interval. This time interval should be set to a value comparable to the **Alternate Route Timer** on the signaling group form described in **Section 5.6**.

Verify that the **Preferred Minimum Session Refresh Interval** is set to a value acceptable to the service provider. This value defines the interval that re-INVITES must be sent to keep the active session alive. For the compliance test, the value of **600** seconds was used.

```
add trunk-group 7                                     Page 2 of 21
  Group Type: sip
TRUNK PARAMETERS
  Unicode Name: auto
                                                    Redirect On OPTIM Failure: 15000
  SCCAN? n                                         Digital Loss Group: 18
                                                    Preferred Minimum Session Refresh Interval(sec): 600
```

On **Page 3**, set the **Numbering Format** field to *public*. This field specifies the format of the calling party number (CPN) sent to the far-end.

Set the **Replace Restricted Numbers** and **Replace Unavailable Numbers** fields to *y*. This will allow the CPN displayed on local endpoints to be replaced with the value set in **Section 5.2** if the inbound call enabled CPN block. For outbound calls, these same settings request that CPN block be activated on the far-end destination if a local user requests CPN block on a particular call routed out this trunk. Default values were used for all other fields.

```
add trunk-group 7                                     Page 3 of 21
TRUNK FEATURES
  ACA Assignment? n                                Measured: none
                                                Maintenance Tests? y

  Numbering Format: public
                                                UUI Treatment: service-provider
                                                Replace Restricted Numbers? y
                                                Replace Unavailable Numbers? y

  Show ANSWERED BY on Display? y
```

On **Page 4**, set the **Network Call Redirection** field to *n*. Set the **Send Diversion Header** field to *y*, which provides additional information to the network if the call has been re-directed. This is needed to support call forwarding of inbound calls back to the PSTN and some Extension to Cellular (EC500) call scenarios.

Set the **Telephone Event Payload Type** to *100*, the value preferred by CenturyLink.

```
add trunk-group 7                                     Page 4 of 21
                                                PROTOCOL VARIATIONS
  Mark Users as Phone? y
  Prepend '+' to Calling Number? n
  Send Transferring Party Information? n
  Network Call Redirection? n
  Send Diversion Header? y
  Support Request History? n
  Telephone Event Payload Type: 100
```



## 5.8. Calling Party Information

The calling party number is sent in the SIP “From”, “Contact” and “PAI” headers. Since public numbering was selected to define the format of this number (**Section 5.7**), use the **change public-unknown-numbering** command to create an entry for each extension which has a DID assigned. The DID number will be assigned and provided by the SIP service provider. It is used to authenticate the caller.

In the sample configuration, five DID numbers were assigned for testing. These five DID numbers were assigned to six extensions (4050 thru 4054, 4056 and 4057). These 10-digit DID numbers were used for the outbound calling party information on the service provider trunk whenever calls were originated from these six extensions. **NOTE:** Extensions 4050 and 4056, the analog and digital phones respectively, used the same DID of 913-555-5972 for their outbound calling party information due to only having five DIDs for this compliance test (the same is true with the 9630 IP phone and the One-X Communicator softphone (x4054 and x4057 respectively)).

```
change public-unknown-numbering 0                                     Page 1 of 2
NUMBERING - PUBLIC/UNKNOWN FORMAT
Total
Ext  Ext      Trk      CPN      Total
Len  Code      Grp(s)  Prefix   CPN
4    4          5        4
4    4050      1        9135555972  10
4    4051      1        9135555973  10
4    4052      1        9135555974  10
4    4053      1        9135555975  10
4    4054      1        9135555976  10
4    4056      1        9135555972  10
4    4057      1        9135555976  10
Total Administered: 94
Maximum Entries: 9999
```

## 5.9. Outbound Routing

In these Application Notes, the Automatic Route Selection (ARS) feature is used to route outbound calls via the SIP trunk to the service provider. In the sample configuration, the single digit 9 is used as the ARS access code. Enterprise callers will dial 9 to reach an “outside line”. This common configuration is illustrated below with little elaboration. Use the **change dialplan analysis** command to define a dialed string beginning with 9 and having a total length of 1 digit, as a feature access code (**fac**).

```
change dialplan analysis
```

Page 1 of 12

DIAL PLAN ANALYSIS TABLE  
Location: all                      Percent Full: 1

Dialed String	Total Length	Call Type	Dialed String	Total Length	Call Type	Dialed String	Total Length	Call Type
1	3	dac						
4	4	ext						
411	3	aar						
5	4	ext						
6	4	ext						
7	4	ext						
<b>9</b>	<b>1</b>	<b>fac</b>						
*	3	fac						
#	3	fac						

Use the **change feature-access-codes** command to configure **9** as the **Auto Route Selection (ARS) – Access Code 1**.

```
change feature-access-codes
```

Page 1 of 10

FEATURE ACCESS CODE (FAC)

```
Abbreviated Dialing List1 Access Code: 137
Abbreviated Dialing List2 Access Code:
Abbreviated Dialing List3 Access Code: 160
Abbreviated Dial - Prgm Group List Access Code:
Announcement Access Code: 115
Answer Back Access Code: 116
Attendant Access Code:
Auto Alternate Routing (AAR) Access Code: *88
Auto Route Selection (ARS) - Access Code 1: 9      Access Code 2:
Automatic Callback Activation: 120                      Deactivation: 121
Call Forwarding Activation Busy/DA: 122      All: 123                      Deactivation: 124
Call Forwarding Enhanced Status:                      Act:                      Deactivation:
Call Park Access Code: 125
Call Pickup Access Code: 126
```

Use the **change ars analysis x** command to configure the routing of dialed digits following the first digit 9, where **x** is the next digit in the string to be matched against the table below. The example below shows a large subset of the dialed strings tested as part of the compliance test. Towards the bottom there are example entries for 10-digit dialing. See **Section 2.1** for the complete list of call types tested. All dialed strings are mapped to route pattern 1 which contains the SIP trunk to the service provider (as defined next).

```
change ars analysis 0
```

Page 1 of 2

ARS DIGIT ANALYSIS TABLE  
Location: all                      Percent Full: 1

Dialed String	Total		Route Pattern	Call Type	Node Num	ANI Reqd
	Min	Max				
0	1	1	1	op		n
0	8	8	1	op		n
0	11	11	1	op		n
00	2	2	1	op		n
01	9	17	1	iop		n
011	10	18	1	intl		n
..... output truncated.....						
130	11	11	1	hnpa		
1300	11	11	deny	fnpa		
131	11	11	1	fnpa		
132	11	11	1	fnpa		
133	11	11	1	fnpa		
134	11	11	1	fnpa		
135	11	11	1	fnpa		
136	11	11	1	fnpa		
137	11	11	1	fnpa		
..... output truncated.....						
172	11	11	1	hnpa		
173	11	11	1	fnpa		
174	11	11	1	fnpa		
175	11	11	1	fnpa		
176	11	11	1	fnpa		
177	11	11	1	fnpa		
178	11	11	1	fnpa		
179	11	11	1	fnpa		
180	11	11	1	fnpa		
..... output truncated.....						
2	10	10	1	fnpa		
3	10	10	1	hnpa		
4	10	10	1	fnpa		
411	3	3	1	svcl		
5	10	10	1	fnpa		
6	10	10	1	fnpa		
611	3	3	1	svcl		
7	10	10	1	hnpa		
8	10	10	1	fnpa		
811	3	3	1	svcl		
9	10	10	1	fnpa		
911	3	3	1	svcl		
913	10	10	1	fnpa		

The route pattern defines which trunk group will be used for the call and performs any necessary digit manipulation. Use the **change route-pattern** command to configure the parameters for the service provider trunk route pattern in the following manner. The example below shows the values used for route pattern 7 used for the compliance test.

- **Pattern Name:** Enter a descriptive name.
- **Grp No:** Enter the outbound trunk group for the SIP service provider. For the compliance test, trunk group 7 was used.
- **FRL:** Set the Facility Restriction Level (FRL) field to a level that allows access to this trunk for all users that require it. The value of 0 is the least restrictive level.
- **Pfx Mrk:** 1 The prefix mark (Pfx Mrk) of one will prefix any FNPA 10-digit number with a 1 and leave numbers of any other length unchanged. This will ensure 1 + 10 digits are sent to the service provider for long distance North American Numbering Plan (NANP) numbers. All HNP 10 digit numbers are left unchanged.
- **LAR:** *next*

```

change route-pattern 7                                     Page 1 of 3
                Pattern Number: 7   Pattern Name: CL SIPT
                SCCAN? n           Secure SIP? n
  Grp FRL NPA Pfx Hop Toll No.  Inserted           DCS/ IXC
  No   No   Pfx Mrk Lmt List Del  Digits           QSIG
                Dgts           Intw
1: 7   0   1                n   user
2:                n   user
3:                n   user
4:                n   user
5:                n   user
6:                n   user

  BCC VALUE TSC CA-TSC ITC BCIE Service/Feature PARM No. Numbering LAR
  0 1 2 M 4 W Request          Dgts Format
                Subaddress
1: y y y y y n n                rest           next
2: y y y y y n n                rest           none
3: y y y y y n n                rest           none
4: y y y y y n n                rest           none
5: y y y y y n n                rest           none
6: y y y y y n n                rest           none

```

## 6. Configure Acme Packet 3800 Net-Net Session Border Controller

The following sections describe the provisioning of the Acme Packet 3800 Net-Net SBC. Only the SBC provisioning required for the reference configuration is described in these Application Notes. The resulting SBC configuration file is shown in **Appendix A**.

The Acme Packet SBC was configured using the Acme Packet CLI via a serial console port connection. An IP remote connection to a management port is also supported. The following are the generic steps for configuring various elements.

1. Log in with the appropriate credentials.
2. Enable the Superuser mode by entering **enable** and the appropriate password (prompt will end with #).
3. In Superuser mode, type **configure terminal** and press <ENTER>. The prompt will change to *(configure)#*.
4. Type the name of the element that will be configured (e.g., **session-router**).
5. Type the name of the sub-element, if any (e.g., **session-agent**).
6. Type the name of the parameter followed by its value (e.g., **ip-address**).
7. Type **done**.
8. Type **exit** to return to the previous menu.
9. Repeat steps 4 - 8 to configure all the elements. When finished, exit from the configuration mode by typing **exit** until returned to the Superuser prompt.
10. Type **save-config** to save the configuration.
11. Type **verify-config** to verify that no errors have been made.
12. Type **activate-config** to activate the configuration.

Once the provisioning is complete, the configuration may be verified by entering the **show running-config** command.

### 6.1. Physical Interfaces

This section defines the physical interfaces for the private enterprise and public networks.

#### 6.1.1. Public Interface

Create a phy-interface for the public side of the Acme.

1. Enter **system** → **phy-interface**
2. Enter **name** → **s1p0**
3. Enter **operation-type** → **Media**
4. Enter **port** → **0**
5. Enter **slot** → **0**
6. Enter **duplex-mode** → **FULL**
7. Enter **speed** → **100**
8. Enter **done**
9. Enter **exit**

### 6.1.2. Private Interface

Create a phy-interface for the private enterprise side of the Acme.

1. Enter **system** → **phy-interface**
2. Enter **name** → **s0p0**
3. Enter **operation-type** → **Media**
4. Enter **port** → **0**
5. Enter **slot** → **1**
6. Enter **duplex-mode** → **FULL**
7. Enter **speed** → **100**
8. Enter **done**
9. Enter **exit**

## 6.2. Network Interfaces

This section defines the network interfaces for the private enterprise and public IP networks.

### 6.2.1. Public Interface

Create a network-interface to the public side of the Acme.

1. Enter **system** → **network-interface**
2. Enter **name** → **s1p0**
3. Enter **ip-address** → **205.1.1.21**
4. Enter **netmask** → **255.255.255.128**
5. Enter **gateway** → **205.1.1.1**
6. Enter **dns-ip-primary** → **205.1.1.9**
7. Enter **hip-ip-list** → **205.1.1.21**
8. Enter **icmp-ip-list** → **205.1.1.21**
9. Enter **done**
10. Enter **exit**

### 6.2.2. Private Interface

Create a network-interface for the private enterprise side of the Acme.

1. Enter **system** → **network-interface**
2. Enter **name** → **s0p0**
3. Enter **ip-address** → **192.168.3.3**
4. Enter **netmask** → **255.255.255.0**
5. Enter **gateway** → **192.168.3.1**
6. Enter **hip-ip-list** → **192.168.3.3**
7. Enter **icmp-ip-list** → **192.168.3.3**
8. Enter **done**
9. Enter **exit**

## 6.3. Realms

Realms are used as a basis for determining egress and ingress associations between physical and network interfaces as well as applying header manipulation such as NAT.

### 6.3.1. Outside Realm

Create a realm for the external network.

1. Enter **media-manager** → **realm-config**
2. Enter **identifier** → **CenturyLink**
3. Enter **network-interfaces** → **s1p0:0**
4. Enter **done**
5. Enter **exit**

### 6.3.2. Inside Realm

Create a realm for the internal network.

1. Enter **media-manager** → **realm-config**
2. Enter **identifier** → **Enterprise**
3. Enter **network-interfaces** → **s0p0:0**
4. Enter **done**
5. Enter **exit**

## 6.4. Steering-Pools

Steering pools define sets of ports that are used for steering media flows thru the Acme.

### 6.4.1. Outside Steering-Pool

Create a steering-pool for the outside network.

1. Enter **media-manager** → **steering-pool**
2. Enter **ip-address** → **205.1.1.21**
3. Enter **start-port** → **16384**
4. Enter **end-port** → **32767**
5. Enter **realm-id** → **CenturyLink**
6. Enter **done**
7. Enter **exit**

### 6.4.2. Inside Steering-Pool

Create a steering-pool for the inside network.

1. Enter **media-manager** → **steering-pool**
2. Enter **ip-address** → **192.168.3.3**
3. Enter **start-port** → **16384**
4. Enter **end-port** → **32767**
5. Enter **realm-id** → **Enterprise**
6. Enter **done**
7. Enter **exit**

## 6.5. Media-Manager

Verify that the media-manager process is enabled.

1. Enter **media-manager** → **media-manager**
2. Enter **select** → **show** Verify that the media-manager state is enabled. If not, perform steps 3 - 5.
3. Enter **state** → **enabled**
4. Enter **done**
5. Enter **exit**

## 6.6. SIP Configuration

This command sets the values for the Acme Packet SIP operating parameters. The home-realm defines the SIP daemon location, and the egress-realm is the realm that will be used to send a request if a realm is not specified elsewhere.

1. Enter **session-router** → **sip-config**
2. Enter **state** → **enabled**
3. Enter **operation-mode** → **dialog**
4. Enter **home-realm-id** → **Enterprise**
5. Enter **egress-realm-id** → **Enterprise**
6. Enter **nat-mode** → **None**
7. Enter **done**
8. Enter **exit**

## 6.7. SIP Interfaces

The SIP interface defines the SIP signaling interface (IP address and port) on the Acme Packet. SIP header manipulations can be applied at the SIP interface level.

### 6.7.1. Outside SIP Interface

Create a sip-interface for the outside network.

1. Enter **session-router** → **sip-interface**
2. Enter **state** → **enabled**
3. Enter **realm-id** → **CenturyLink**
4. Enter **sip-port**
  - a. Enter **address** → **205.1.1.21**
  - b. Enter **port** → **5060**
  - c. Enter **transport-protocol** → **UDP**
  - d. Enter **allow-anonymous** → **all**
  - e. Enter **done**
  - f. Enter **exit**
5. Enter **stop-recurse** → **401,407**
6. Enter **done**
7. Enter **exit**

### 6.7.2. Inside SIP Interface

Create a sip-interface for the inside network.

1. Enter **session-router** → **sip-interface**



2. Enter **state** → **enabled**
3. Enter **realm-id** → **Enterprise**
4. Enter **sip-port**
  - a. Enter **address** → **192.168.3.3**
  - b. Enter **port** → **5060**
  - c. Enter **transport-protocol** → **TCP**
  - d. Enter **allow-anonymous** → **all**
  - e. Enter **done**
  - f. Enter **exit**
5. Enter **stop-recurse** → **401,407**
6. Enter **done**
7. Enter **exit**

## 6.8. Session-Agents

A session-agent defines an internal “next hop” signaling entity for the SIP traffic. A realm is associated with a session-agent to identify sessions coming from or going to the session-agent. A session-agent is defined for the service provider (outside) and Avaya Aura® Communication Manager (inside). SIP header manipulations can be applied at the SIP Session-Agent level.

### 6.8.1. Outside Session-Agent

Create a session-agent for the outside network.

1. Enter **session-router** → **session-agent**
2. Enter **hostname** → **69.1.1.157**
3. Enter **ip-address** → **69.1.1.157**
4. Enter **port** → **5060**
5. Enter **state** → **enabled**
6. Enter **app-protocol** → **SIP**
7. Enter **transport-method** → **UDP**
8. Enter **realm-id** → **CenturyLink**
9. Enter **description** → **CenturyLink**
10. Enter **ping-method** → **OPTIONS;hops=70**
11. Enter **ping-interval** → **60**
12. Enter **ping-send-mode** → **keep-alive**
13. Enter **done**
14. Enter **exit**

### 6.8.2. Inside Session-Agent

Create a session-agent for the inside network.

1. Enter **session-router** → **session-agent**
2. Enter **hostname** → **cm521**
3. Enter **ip-address** → **192.168.3.17**
4. Enter **port** → **5060**
5. Enter **transport-method** → **UDP+TCP**
6. Enter **realm-id** → **Enterprise**
7. Enter **description** →

8. Enter **ping-method** →
9. Enter **ping-interval** → **60**
10. Enter **ping-send-mode** → **keep-alive**
11. Enter **done**
12. Enter **exit**

## 6.9. Local Policies

Local policies allow SIP requests from the **Enterprise** realm to be routed to the service provider session agent in the **CenturyLink** realm, and vice-versa.

### 6.9.1. Enterprise to CenturyLink

Create a local-policy for the **Enterprise** realm.

1. Enter **session-router** → **local-policy**
2. Enter **from-address** → \*
3. Enter **to-address** → \*
4. Enter **source-realm** → **Enterprise**
5. Enter **state** → **enabled**
6. Enter **policy-attributes**
  - a. Enter **next-hop** → **69.1.1.157**
  - b. Enter **realm** → **CenturyLink**
  - c. Enter **terminate-recursion** → **enabled**
  - d. Enter **app-protocol** → **SIP**
  - e. Enter **state** → **enabled**
  - f. Enter **done**
  - g. Enter **exit**
7. Enter **done**
8. Enter **exit**

### 6.9.2. CenturyLink to Enterprise

Create a local-policy for the **CenturyLink** realm.

1. Enter **session-router** → **local-policy**
2. Enter **from-address** → \*
3. Enter **to-address** → \*
4. Enter **source-realm** → **CenturyLink**
5. Enter **state** → **enabled**
6. Enter **policy-attributes**
  - a. Enter **next-hop** → **192.168.3.17**
  - b. Enter **realm** → **Enterprise**
  - c. Enter **terminate-recursion** → **enabled**
  - d. Enter **app-protocol** → **SIP**
  - e. Enter **state** → **enabled**
  - f. Enter **done**
  - g. Enter **exit**
7. Enter **done**
8. Enter **exit**

## 7. CenturyLink SIP Trunking Configuration

To use CenturyLink SIP Trunking, a customer must request the service from CenturyLink using their sales processes. The process can be started by contacting CenturyLink via the corporate web site at [www.CenturyLinknetworks.com](http://www.CenturyLinknetworks.com) and requesting information via the online sales links or telephone numbers.

During the signup process, CenturyLink will require that the customer provide the public IP address used to reach the SBC at the edge of the enterprise. CenturyLink will provide the IP address of the CenturyLink SIP proxy/SBC, IP addresses of media sources and Direct Inward Dialed (DID) numbers assigned to the enterprise. This information is used to complete the Communication Manager and the SBC configuration discussed in the previous sections. The configuration between CenturyLink and the enterprise is a static configuration. There is no registration of the SIP trunk or enterprise users to the CenturyLink network.

## 8. Verification Steps

This section provides verification steps that may be performed in the field to verify that the solution is configured properly. This section also provides a list of useful troubleshooting commands that can be used to troubleshoot the solution.

Verification Steps:

1. Verify that endpoints at the enterprise site can place calls to the PSTN and that the call remains active for more than 35 seconds. This time period is included to verify that proper routing of the SIP messaging has satisfied SIP protocol timers.
2. Verify that endpoints at the enterprise site can receive calls from the PSTN and that the call can remain active for more than 35 seconds.
3. Verify that the user on the PSTN can end an active call by hanging up.
4. Verify that an endpoint at the enterprise site can end an active call by hanging up.

Troubleshooting commands on Communication Manager:

- **list trace station** <extension number> - Traces calls to and from a specific station.
- **list trace tac** <trunk access code number> - Traces calls over a specific trunk group.
- **status station** <extension number> - Displays signaling and media information for an active call on a specific station.
- **status trunk** <trunk group number> - Displays trunk group information.
- **status trunk** <trunk group number/channel number> - Displays signaling and media information for an active trunk channel.

## 9. Conclusion

These Application Notes describe the configuration necessary to connect Avaya Aura® Communication Manager and Acme Packet 3800 Net-Net Session Border Controller to CenturyLink SIP Trunking. CenturyLink SIP Trunking is a SIP-based Voice over IP solution for customers ranging from small businesses to large enterprises. CenturyLink SIP Trunking provides businesses a flexible, cost-saving alternative to traditional hardwired telephony trunks.

CenturyLink SIP Trunking passed compliance testing. Please refer to **Section 2.2** for any exceptions or workarounds.

## 10. References

This section references the documentation relevant to these Application Notes. Additional Avaya product documentation is available at <http://support.avaya.com>.

- [1] *Administering Avaya Aura® Communication Manager*, Release 5.2, May 2009, Document Number 03-300509.
- [2] *Avaya Aura® Communication Manager Feature Description and Implementation*, Release 5.2, May 2009, Document Number 555-245-205.
- [3] *4600 Series IP Telephone LAN Administrator Guide*, October 2007, Document Number 555-233-507.
- [4] *Avaya one-X® Deskphone Edition for 9600 Series IP Telephones Administrator Guide*, Release 3.1, November 2009, Document Number 16-300698.
- [5] *Avaya one-X® Communicator Getting Started*, August 2010.
- [6] RFC 3261 *SIP: Session Initiation Protocol*, <http://www.ietf.org/>
- [7] RFC 2833 RTP Payload for DTMF Digits, Telephony Tones and Telephony Signals, <http://www.ietf.org/>
- [8] RFC 4244, An Extension to the Session Initiation Protocol (SIP) for Request History Information, <http://www.ietf.org/>

## 11. Appendix A: Acme Packet 3800 Net-Net SBC Configuration File

```
EnterpriseSBC# show running-config
local-policy
  from-address
                                     *
  to-address
                                     *
  source-realm
                                     Enterprise
  description
  activate-time                       N/A
  deactivate-time                     N/A
  state                               enabled
  policy-priority                     none
  last-modified-by                   admin@135.9.230.222
  last-modified-date                 2011-01-31 19:41:58
  policy-attribute
    next-hop                         69.1.1.157
    realm                             CenturyLink
    action                             none
    terminate-recursion              disabled
    carrier
    start-time                       0000
    end-time                           2400
    days-of-week                      U-S
    cost                               0
    app-protocol                     SIP
    state                             enabled
    methods
    media-profiles
    lookup                             single
    next-key
    eloc-str-lkup                     disabled
    eloc-str-match
local-policy
  from-address
                                     *
  to-address
                                     *
  source-realm
                                     CenturyLink
  description
  activate-time                       N/A
  deactivate-time                     N/A
  state                               enabled
  policy-priority                     none
  last-modified-by                   admin@135.9.230.222
  last-modified-date                 2011-02-15 13:57:17
  policy-attribute
    next-hop                         192.168.3.17
    realm                             Enterprise
    action                             none
```

```

        terminate-recursion      disabled
        carrier
        start-time                0000
        end-time                  2400
        days-of-week              U-S
        cost                      0
        app-protocol              SIP
        state                     enabled
        methods
        media-profiles
        lookup                    single
        next-key
        eloc-str-lkup            disabled
        eloc-str-match

local-policy
  from-address
                                *
  to-address
                                avayalab.com
  source-realm
                                CenturyLink
  description
  activate-time                 N/A
  deactivate-time               N/A
  state                         enabled
  policy-priority               none
  last-modified-by              admin@135.9.230.222
  last-modified-date            2011-02-15 13:57:56
  policy-attribute
    next-hop                    192.168.3.17
    realm                       Enterprise
    action                      none
    terminate-recursion        disabled
    carrier
    start-time                  0000
    end-time                    2400
    days-of-week                U-S
    cost                        0
    app-protocol                SIP
    state                       enabled
    methods
    media-profiles
    lookup                      single
    next-key
    eloc-str-lkup              disabled
    eloc-str-match

media-manager
  state                         enabled
  latching                      enabled
  flow-time-limit               86400
  initial-guard-timer           300
  subsq-guard-timer             300
  tcp-flow-time-limit           86400
  tcp-initial-guard-timer       300
  tcp-subsq-guard-timer         300
  tcp-number-of-ports-per-flow  2

```

```

hnt-rtcp                disabled
algd-log-level          NOTICE
mbcd-log-level          NOTICE
red-flow-port           1985
red-mgcp-port           1986
red-max-trans           10000
red-sync-start-time     5000
red-sync-comp-time      1000
media-policing          enabled
max-signaling-bandwidth 10000000
max-untrusted-signaling 100
min-untrusted-signaling 30
app-signaling-bandwidth 0
tolerance-window        30
rtcp-rate-limit         0
trap-on-demote-to-deny  disabled
min-media-allocation    2000
min-trusted-allocation  4000
deny-allocation         32000
anonymous-sdp           disabled
arp-msg-bandwidth       32000
fragment-msg-bandwidth  0
rfc2833-timestamp       disabled
default-2833-duration   100
rfc2833-end-pkts-only-for-non-sig enabled
translate-non-rfc2833-event disabled
media-supervision-traps disabled
dnsgl-server-failover   disabled
last-modified-by        admin@135.9.230.222
last-modified-date      2010-09-08 19:23:20
network-interface
  name                   wancom0
  sub-port-id            0
  description
  hostname
  ip-address              135.9.230.221
  pri-utility-addr
  sec-utility-addr
  netmask                 255.255.255.0
  gateway                 135.9.230.254
  sec-gateway
  gw-heartbeat
    state                 disabled
    heartbeat              0
    retry-count            0
    retry-timeout          1
    health-score           0
  dns-ip-primary
  dns-ip-backup1
  dns-ip-backup2
  dns-domain
  dns-timeout              11
    hip-ip-list            135.9.230.223
  ftp-address
  icmp-address
  snmp-address

```

```

telnet-address
ssh-address
last-modified-by      admin@135.9.230.224
last-modified-date    2011-02-14 15:02:59
network-interface
name                   s0p0
sub-port-id            0
description
hostname
ip-address             192.168.3.3
pri-utility-addr
sec-utility-addr
netmask                255.255.255.0
gateway                192.168.3.1
sec-gateway
gw-heartbeat
    state              disabled
    heartbeat          0
    retry-count        0
    retry-timeout      1
    health-score       0
dns-ip-primary         192.168.3.9
dns-ip-backup1
dns-ip-backup2
dns-domain             avayalab.com
dns-timeout            11
    hip-ip-list        192.168.3.3
ftp-address
    icmp-address       192.168.3.3
snmp-address
telnet-address
ssh-address
last-modified-by      admin@135.9.230.224
last-modified-date    2011-02-14 15:28:49
network-interface
name                   s1p0
sub-port-id            0
description
hostname
ip-address             205.1.1.21
pri-utility-addr
sec-utility-addr
netmask                255.255.255.128
gateway                205.1.1.1
sec-gateway
gw-heartbeat
    state              disabled
    heartbeat          0
    retry-count        0
    retry-timeout      1
    health-score       0
dns-ip-primary
dns-ip-backup1
dns-ip-backup2
dns-domain
dns-timeout            11

```



```

    hip-ip-list                205.1.1.21
    ftp-address
    icmp-address               205.1.1.21
    snmp-address
    telnet-address
    ssh-address
    last-modified-by          admin@135.9.230.222
    last-modified-date        2011-01-05 00:48:51
ntp-config
    server                     135.9.230.223
    last-modified-by          admin@135.9.230.222
    last-modified-date        2011-02-12 20:32:19
phy-interface
    name                       wancom0
    operation-type             Control
    port                       0
    slot                       1
    virtual-mac
    wancom-health-score       50
    overload-protection        disabled
    last-modified-by          admin@console
    last-modified-date        2010-04-20 12:15:56
phy-interface
    name                       s0p0
    operation-type             Media
    port                       0
    slot                       0
    virtual-mac
    admin-state                enabled
    auto-negotiation           enabled
    duplex-mode                 FULL
    speed                       100
    overload-protection        disabled
    last-modified-by          admin@135.9.230.222
    last-modified-date        2010-04-20 12:31:37
phy-interface
    name                       slp0
    operation-type             Media
    port                       0
    slot                       1
    virtual-mac
    admin-state                enabled
    auto-negotiation           enabled
    duplex-mode                 FULL
    speed                       100
    overload-protection        disabled
    last-modified-by          admin@135.9.230.222
    last-modified-date        2010-04-20 14:18:05
realm-config
    identifier                  CenturyLink
    description
    addr-prefix                 0.0.0.0
    network-interfaces
                                slp0:0
    mm-in-realm                 enabled
    mm-in-network               enabled

```

mm-same-ip	enabled
mm-in-system	enabled
bw-cac-non-mm	disabled
msm-release	disabled
generate-UDP-checksum	disabled
max-bandwidth	0
fallback-bandwidth	0
max-priority-bandwidth	0
max-latency	0
max-jitter	0
max-packet-loss	0
observ-window-size	0
parent-realm	
dns-realm	
media-policy	
media-sec-policy	
in-translationid	
out-translationid	
in-manipulationid	
out-manipulationid	
manipulation-string	
manipulation-pattern	
class-profile	
average-rate-limit	0
access-control-trust-level	none
invalid-signal-threshold	0
maximum-signal-threshold	0
untrusted-signal-threshold	0
nat-trust-threshold	0
deny-period	30
ext-policy-svr	
symmetric-latching	disabled
pai-strip	disabled
trunk-context	
early-media-allow	
enforcement-profile	
additional-prefixes	
restricted-latching	none
restriction-mask	32
accounting-enable	enabled
user-cac-mode	none
user-cac-bandwidth	0
user-cac-sessions	0
icmp-detect-multiplier	0
icmp-advertisement-interval	0
icmp-target-ip	
monthly-minutes	0
net-management-control	disabled
delay-media-update	disabled
refer-call-transfer	disabled
dyn-refer-term	disabled
codec-policy	
codec-manip-in-realm	disabled
constraint-name	
call-recording-server-id	
xnq-state	xnq-unknown

hairpin-id	0
stun-enable	disabled
stun-server-ip	0.0.0.0
stun-server-port	3478
stun-changed-ip	0.0.0.0
stun-changed-port	3479
match-media-profiles	
qos-constraint	
sip-profile	
sip-isup-profile	
block-rtcp	disabled
hide-egress-media-update	disabled
last-modified-by	admin@135.9.230.222
last-modified-date	2011-01-06 14:42:51
realm-config	
identifier	Enterprise
description	
addr-prefix	0.0.0.0
network-interfaces	
	s0p0:0
mm-in-realm	enabled
mm-in-network	enabled
mm-same-ip	enabled
mm-in-system	enabled
bw-cac-non-mm	disabled
msm-release	disabled
generate-UDP-checksum	disabled
max-bandwidth	0
fallback-bandwidth	0
max-priority-bandwidth	0
max-latency	0
max-jitter	0
max-packet-loss	0
observ-window-size	0
parent-realm	
dns-realm	
media-policy	
media-sec-policy	
in-translationid	
out-translationid	
in-manipulationid	
out-manipulationid	
manipulation-string	
manipulation-pattern	
class-profile	
average-rate-limit	0
access-control-trust-level	none
invalid-signal-threshold	0
maximum-signal-threshold	0
untrusted-signal-threshold	0
nat-trust-threshold	0
deny-period	30
ext-policy-svr	
symmetric-latching	disabled
pai-strip	disabled
trunk-context	

```

early-media-allow
enforcement-profile
additional-prefixes
restricted-latching          none
restriction-mask             32
accounting-enable            enabled
user-cac-mode                none
user-cac-bandwidth          0
user-cac-sessions            0
icmp-detect-multiplier       0
icmp-advertisement-interval  0
icmp-target-ip
monthly-minutes              0
net-management-control       disabled
delay-media-update           disabled
refer-call-transfer          disabled
dyn-refer-term               disabled
codec-policy
codec-manip-in-realm        disabled
constraint-name
call-recording-server-id
xnq-state                    xnq-unknown
hairpin-id                   0
stun-enable                  disabled
stun-server-ip               0.0.0.0
stun-server-port             3478
stun-changed-ip              0.0.0.0
stun-changed-port            3479
match-media-profiles
qos-constraint
sip-profile
sip-isup-profile
block-rtcp                   disabled
hide-egress-media-update     disabled
last-modified-by             admin@135.9.230.222
last-modified-date           2010-05-15 23:58:52
session-agent
hostname                      cm521
ip-address                    192.168.3.17
port                           5060
state                          enabled
app-protocol                   SIP
app-type
transport-method              UDP+TCP
realm-id                       Enterprise
egress-realm-id
description
carriers
allow-next-hop-lp             enabled
constraints                    disabled
max-sessions                   0
max-inbound-sessions          0
max-outbound-sessions         0
max-burst-rate                 0
max-inbound-burst-rate        0
max-outbound-burst-rate       0

```

```

max-sustain-rate          0
max-inbound-sustain-rate  0
max-outbound-sustain-rate 0
min-seizures             5
min-asr                   0
time-to-resume            0
ttr-no-response           0
in-service-period         0
burst-rate-window         0
sustain-rate-window       0
req-uri-carrier-mode      None
proxy-mode
redirect-action
loose-routing              enabled
send-media-session         enabled
response-map
ping-method                OPTIONS
ping-interval              60
ping-send-mode             keep-alive
ping-all-addresses        disabled
ping-in-service-response-codes
out-service-response-codes
media-profiles
in-translationid
out-translationid
trust-me                   enabled
request-uri-headers
stop-recurse
local-response-map
ping-to-user-part
ping-from-user-part
li-trust-me                disabled
in-manipulationid
out-manipulationid
manipulation-string
manipulation-pattern
p-asserted-id
trunk-group
max-register-sustain-rate  0
early-media-allow
invalidate-registrations   disabled
rfc2833-mode              none
rfc2833-payload           0
codec-policy
enforcement-profile
refer-call-transfer        disabled
reuse-connections          NONE
tcp-keepalive             none
tcp-reconn-interval       0
max-register-burst-rate   0
register-burst-window      0
sip-profile
sip-isup-profile
last-modified-by          admin@135.9.230.222
last-modified-date        2011-03-23 09:02:16
session-agent

```

hostname	69.1.1.157
ip-address	69.1.1.157
port	5060
state	enabled
app-protocol	SIP
app-type	
transport-method	UDP
realm-id	CenturyLink
egress-realm-id	
description	
carriers	
allow-next-hop-lp	enabled
constraints	disabled
max-sessions	0
max-inbound-sessions	0
max-outbound-sessions	0
max-burst-rate	0
max-inbound-burst-rate	0
max-outbound-burst-rate	0
max-sustain-rate	0
max-inbound-sustain-rate	0
max-outbound-sustain-rate	0
min-seizures	5
min-asr	0
time-to-resume	0
ttr-no-response	0
in-service-period	0
burst-rate-window	0
sustain-rate-window	0
req-uri-carrier-mode	None
proxy-mode	
redirect-action	
loose-routing	enabled
send-media-session	enabled
response-map	
ping-method	OPTIONS;hops=70
ping-interval	60
ping-send-mode	keep-alive
ping-all-addresses	disabled
ping-in-service-response-codes	
out-service-response-codes	
media-profiles	
in-translationid	
out-translationid	
trust-me	enabled
request-uri-headers	
stop-recurse	
local-response-map	
ping-to-user-part	
ping-from-user-part	
li-trust-me	disabled
in-manipulationid	
out-manipulationid	
manipulation-string	
manipulation-pattern	
p-asserted-id	

```

trunk-group
max-register-sustain-rate      0
early-media-allow
invalidate-registrations       disabled
rfc2833-mode                   none
rfc2833-payload                0
codec-policy
enforcement-profile
refer-call-transfer            disabled
reuse-connections              NONE
tcp-keepalive                  none
tcp-reconn-interval           0
max-register-burst-rate       0
register-burst-window          0
sip-profile
sip-isup-profile
last-modified-by               admin@135.9.230.222
last-modified-date             2011-03-23 09:09:41
sip-config
state                           enabled
operation-mode                 dialog
dialog-transparency            enabled
home-realm-id                  Enterprise
egress-realm-id                Enterprise
nat-mode                        None
registrar-domain
registrar-host
registrar-port                 0
register-service-route          always
init-timer                     500
max-timer                      4000
trans-expire                   32
invite-expire                   180
inactive-dynamic-conn          32
enforcement-profile
pac-method
pac-interval                   10
pac-strategy                    PropDist
pac-load-weight                 1
pac-session-weight              1
pac-route-weight                1
pac-callid-lifetime             600
pac-user-lifetime               3600
red-sip-port                    1988
red-max-trans                   10000
red-sync-start-time             5000
red-sync-comp-time              1000
add-reason-header               disabled
sip-message-len                 4096
enum-sag-match                  disabled
extra-method-stats              enabled
registration-cache-limit        0
register-use-to-for-lp           disabled
options                          max-udp-length=65535
                                set-inv-exp-at-100-resp
refer-src-routing               disabled

```

```

add-ucid-header                disabled
proxy-sub-events
pass-gruu-contact              disabled
sag-lookup-on-redirect         disabled
last-modified-by               admin@135.9.230.222
last-modified-date             2010-09-09 16:43:20
sip-interface
state                           enabled
realm-id                       CenturyLink
description
sip-port
    address                     205.1.1.21
    port                         5060
    transport-protocol          UDP
    tls-profile
    allow-anonymous             all
    ims-aka-profile
carriers
trans-expire                    0
invite-expire                   0
max-redirect-contacts          0
proxy-mode
redirect-action
contact-mode                    none
nat-traversal                  none
nat-interval                    30
tcp-nat-interval               90
registration-caching           disabled
min-reg-expire                 300
registration-interval          3600
route-to-registrar             disabled
secured-network                disabled
teluri-scheme                  disabled
uri-fqdn-domain
trust-mode                      all
max-nat-interval               3600
nat-int-increment              10
nat-test-increment             30
sip-dynamic-hnt                disabled
stop-recurse                   401,407
port-map-start                 0
port-map-end                   0
in-manipulationid
out-manipulationid
manipulation-string
manipulation-pattern
sip-ims-feature                disabled
operator-identifier
anonymous-priority             none
max-incoming-conns             0
per-src-ip-max-incoming-conns  0
inactive-conn-timeout          0
untrusted-conn-timeout         0
network-id
ext-policy-server
default-location-string

```



```

charging-vector-mode          pass
charging-function-address-mode pass
ccf-address
ecf-address
term-tgrp-mode               none
implicit-service-route       disabled
rfc2833-payload              101
rfc2833-mode                  transparent
constraint-name
response-map
local-response-map
ims-aka-feature               disabled
enforcement-profile
route-unauthorized-calls
tcp-keepalive                 none
add-sdp-invite                disabled
add-sdp-profiles
sip-profile
sip-isup-profile
last-modified-by              admin@135.9.230.222
last-modified-date            2011-01-06 15:22:14
sip-interface
state                          enabled
realm-id                       Enterprise
description
sip-port
    address                     192.168.3.3
    port                          5060
    transport-protocol            TCP
    tls-profile
    allow-anonymous               all
    ims-aka-profile
carriers
trans-expire                   0
invite-expire                   0
max-redirect-contacts           0
proxy-mode
redirect-action
contact-mode                    none
nat-traversal                   none
nat-interval                     30
tcp-nat-interval                 90
registration-caching             disabled
min-reg-expire                   300
registration-interval            3600
route-to-registrar               disabled
secured-network                  disabled
teluri-scheme                    disabled
uri-fqdn-domain
trust-mode                       all
max-nat-interval                 3600
nat-int-increment                 10
nat-test-increment                30
sip-dynamic-hnt                  disabled
stop-recurse                      401,407
port-map-start                    0

```

```

port-map-end 0
in-manipulationid
out-manipulationid
manipulation-string
manipulation-pattern
sip-ims-feature disabled
operator-identifier
anonymous-priority none
max-incoming-conns 0
per-src-ip-max-incoming-conns 0
inactive-conn-timeout 0
untrusted-conn-timeout 0
network-id
ext-policy-server
default-location-string
charging-vector-mode pass
charging-function-address-mode pass
ccf-address
ecf-address
term-tgrp-mode none
implicit-service-route disabled
rfc2833-payload 101
rfc2833-mode transparent
constraint-name
response-map
local-response-map
ims-aka-feature disabled
enforcement-profile
route-unauthorized-calls
tcp-keepalive none
add-sdp-invite disabled
add-sdp-profiles
sip-profile
sip-isup-profile
last-modified-by admin@135.9.230.222
last-modified-date 2011-01-06 15:24:24
steering-pool
ip-address 205.1.1.21
start-port 16384
end-port 32767
realm-id CenturyLink
network-interface
last-modified-by admin@135.9.230.222
last-modified-date 2011-01-06 15:27:07
steering-pool
ip-address 192.168.3.3
start-port 16384
end-port 32767
realm-id Enterprise
network-interface
last-modified-by admin@135.9.230.222
last-modified-date 2010-09-09 16:12:51
system-config
hostname EnterpriseSBC
description
location

```

```

mib-system-contact
mib-system-name
mib-system-location
snmp-enabled                enabled
enable-snmp-auth-traps      disabled
enable-snmp-syslog-notify   disabled
enable-snmp-monitor-traps   disabled
enable-env-monitor-traps    disabled
snmp-syslog-his-table-length 1
snmp-syslog-level           WARNING
system-log-level            WARNING
process-log-level           NOTICE
process-log-ip-address       0.0.0.0
process-log-port             0
collect
    sample-interval          5
    push-interval            15
    boot-state                disabled
    start-time                now
    end-time                  never
    red-collect-state         disabled
    red-max-trans             1000
    red-sync-start-time       5000
    red-sync-comp-time        1000
    push-success-trap-state   disabled
call-trace                   enabled
internal-trace               disabled
log-filter                   all
default-gateway              205.1.1.1
restart                       enabled
exceptions
telnet-timeout               0
console-timeout              0
remote-control               enabled
cli-audit-trail              enabled
link-redundancy-state        disabled
source-routing               disabled
cli-more                     disabled
terminal-height              24
debug-timeout                0
trap-event-lifetime          0
default-v6-gateway           ::
ipv6-support                 disabled
cleanup-time-of-day          00:00
last-modified-by             admin@135.9.230.222
last-modified-date           2011-02-12 20:09:52
task done
EnterpriseSBC#

```

---

**©2011 Avaya Inc. All Rights Reserved.**

Avaya and the Avaya Logo are trademarks of Avaya Inc. All trademarks identified by ® and ™ are registered trademarks or trademarks, respectively, of Avaya Inc. All other trademarks are the property of their respective owners. The information provided in these Application Notes is subject to change without notice. The configurations, technical data, and recommendations provided in these Application Notes are believed to be accurate and dependable, but are presented without express or implied warranty. Users are responsible for their application of any products specified in these Application Notes.

Please e-mail any questions or comments pertaining to these Application Notes along with the full title name and filename, located in the lower right corner, directly to the Avaya DevConnect Program at [devconnect@avaya.com](mailto:devconnect@avaya.com).