



# **Application Notes for Configuring the IntelPeer CoreCloud SIP Trunking Service with Avaya Aura® Communication Manager Evolution Server 6.3, Avaya Aura® Session Manager 6.3 and Avaya Session Border Controller for Enterprise 6.2.1 – Issue 1.0**

## **Abstract**

These Application Notes describe the steps to configure Session Initiation Protocol (SIP) Trunking between the IntelPeer CoreCloud SIP Trunking Service and an Avaya SIP-enabled enterprise solution. The Avaya solution consists of Avaya Aura® Session Manager 6.3, Avaya Aura® Communication Manager Evolution Server 6.3, Avaya Session Border Controller for Enterprise 6.2.1 and various Avaya endpoints. IntelPeer is a member of the Avaya DevConnect Service Provider program.

Readers should pay attention to **Section 2**, in particular the scope of testing as outlined in Section 2.1 as well as the observations noted in **Section 2.2**, to ensure that their own use cases are adequately covered by this scope and results.

Information in these Application Notes has been obtained through DevConnect compliance testing and additional technical discussions. Testing was conducted via the DevConnect Program at the Avaya Solution and Interoperability Test Lab.

# 1. Introduction

These Application Notes describe the steps to configure Session Initiation Protocol (SIP) Trunking between the IntelPeer CoreCloud SIP Trunking Service and an Avaya SIP-enabled enterprise solution. The Avaya solution consists of Avaya Aura® Session Manager 6.3, Avaya Aura® Communication Manager Evolution Server 6.3, Avaya Session Border Controller for Enterprise 6.2.1 and various Avaya endpoints. In addition, Avaya Aura® System Manager 6.3 is used to configure Avaya Aura® Session Manager.

Customers using this Avaya SIP-enabled enterprise solution with the IntelPeer CoreCloud SIP Trunking Service are able to place and receive PSTN calls via a broadband WAN connection with SIP. This converged network solution is an alternative to traditional PSTN trunks such as ISDN-PRI.

## 2. General Test Approach and Test Results

The general test approach was to connect a simulated enterprise site to the IntelPeer CoreCloud SIP Trunking Service via the public Internet and exercise the features and functionality listed in **Section 2.1**. The simulated enterprise site was comprised of Communication Manager, Session Manager and Avaya Session Border Controller for Enterprise (Avaya SBCE).

DevConnect Compliance Testing is conducted jointly by Avaya and DevConnect members. The jointly-defined test plan focuses on exercising APIs and/or standards-based interfaces pertinent to the interoperability of the tested products and their functionalities. DevConnect Compliance Testing is not intended to substitute full product performance or feature testing performed by DevConnect members, nor is it to be construed as an endorsement by Avaya of the suitability or completeness of a DevConnect member's solution.

### 2.1. Interoperability Compliance Testing

To verify SIP trunking interoperability, the following features and functionality were covered during the interoperability compliance test.

- Sending and receiving SIP OPTIONS queries to the service provider
- Inbound and outbound PSTN calls (via the SIP trunk) to/from SIP and H.323 telephones at the enterprise
- Inbound and outbound PSTN calls to/from Avaya one-X® Communicator (soft client) using multiple protocols (H.323 and SIP) and multiple modes (Local Computer and Other Phone mode)
- Inbound and outbound PSTN calls to/from Avaya Flare® Experience for Windows
- Various call types including: local, long distance, international and outbound toll-free
- Codecs G.711MU and G.729A
- DTMF transmission using RFC 2833
- Caller ID presentation and Caller ID restriction
- Response to incomplete call attempts and trunk errors
- Voicemail navigation for inbound and outbound calls

- Voicemail Message Waiting Indicator (MWI)
- User features such as hold and resume, internal call forwarding, transfer, and conference
- Off-net call forwarding and mobility (extension to cellular – EC500)
- Direct Media
- Remote Worker

Emergency 911 calls, and inbound toll-free calls are supported but were not tested as part of the compliance test. Due to limitations in the test environment, T.38 fax could not be tested for interoperability.

Items not supported included the following:

- Operator, operator-assisted (0 + 10 digits), and directory assistance (411) calls
- SIP REFER method with the Replaces parameter

## 2.2. Test Results

Interoperability testing of the IntelPeer CoreCloud SIP Trunking Service was completed with successful results for all test cases with the exception of the observations or limitations described below.

- **Disable Initial IP-IP Direct Media:** The Communication Manager feature “Initial IP-IP Direct Media” must be disabled on the signaling group form of the IntelPeer SIP trunk (see **Section 5.6**). If enabled, audio issues may occur when call forwarding inbound calls back to the PSTN, using EC500 and using one-X Communicator in “Other Phone” mode. This feature is not the same as “Direct IP-IP Audio Connections” commonly referred to as “shuffling” which should be enabled. In addition, if Initial IP-IP Direct Media is disabled on the IntelPeer SIP trunk, it should also be disabled on the SIP trunk used by Avaya SIP endpoints. This is because in the release of one-X Communicator (SIP) used for the compliance test, it has a known audio issue if the two trunk settings are not the same and one-X Communicator (SIP) is used in “Other Phone” mode.
- **Disable Network Call Redirection (NCR):** The Communication Manager feature “Network Call Redirection” will instruct Communication Manager to use the SIP REFER method for call redirection. In the case of call transfer, Communication Manager will send REFER with a Replaces parameter which is not supported by IntelPeer. In addition, calls were dropped in call scenarios where REFER without a Replaces parameter was used. NCR must be disabled on the Communication Manager trunk group form (see **Section 5.7**).
- **IntelPeer’s central routing engine may reject INVITEs from Avaya SIP Deskphones:** As a workaround, IntelPeer must ensure that if the central routing engine rejects an INVITE, then the call will fallback to using local routing tables or else outbound calls from Avaya SIP Deskphones will fail. This workaround was used during compliance testing and the calls were successful. This configuration is believed to be the standard configuration in the IntelPeer production network.
- **IntelPeer may not remove ringback when necessary:** Calls inbound to enterprise voicemail or outbound to a PSTN voicemail system resulted in the caller continuing to

hear ringback while the SIP signaling showed that the call had been answered at the far-end. The issue is with the IntelPeer algorithm of when to apply ringback. As a workaround, IntelPeer must disable local ringback until the issue is resolved. This workaround was tested successfully during the compliance test. This workaround is available in production and can be applied on a per trunk basis.

- **Enterprise phone display for outbound calls shows incorrect connected party:** On outbound calls from the enterprise, once the call is answered, the call display should show the connected party. In the case of IntelPeer, the wrong number is sent in the 200 OK response to the initial INVITE request sent from the enterprise resulting in the incorrect call display. The fix required a patch to IntelPeer's softswitch which is not yet available in production. The patch was tested and verified as part of the compliance test.
- **T.38 fax could not be tested for interoperability:** Not all media gateways used by IntelPeer support T.38 fax. Due to limitations in the test environment, it was not possible to perform testing with a T.38 enabled gateway. However, all T.38 fax calls that were attempted properly fell back to G.711 fax.
- **Session refresh reINVITEs sent at a predefined interval:** IntelPeer always sends the session refresh INVITEs at a small predefined interval (3 minutes), independent of what had been negotiated in the signaling as the interval and refresher. No user impact was observed with this behavior if the Preferred Minimum Session Refresh Interval configured on the Communication Manager trunk group form is larger than 3 minutes.
- **Calling Party Number (PSTN transfers):** The calling party number displayed on the PSTN phone is not updated to reflect the true connected party on calls that are transferred to the PSTN. After the call transfer is complete, the calling party number displays the number of the transferring party and not the actual connected party. Communication Manager provides the new connected party information by updating the Contact and/or P-Asserted-Identity (PAI) header in an UPDATE or reINVITE message but the far-end phone display is not updated. The PSTN phone display is ultimately controlled by the PSTN provider, thus this behavior is not necessarily indicative of a limitation of the combined Avaya/IntelPeer solution. It is listed here simply as an observation.

## 2.3. Support

For technical support on the IntelPeer CoreCloud SIP Trunking Service, please contact IntelPeer via the following:

- Web: <http://www.intelepeer.com>
- Phone: 1-866-780-8639

Avaya customers may obtain documentation and support for Avaya products by visiting <http://support.avaya.com>.


### 3. Reference Configuration

**Figure 1** illustrates a sample Avaya SIP-enabled enterprise solution connected to the IntelPeer CoreCloud SIP Trunking Service. This is the configuration used for compliance testing.

The components used to create the simulated customer site included:

- System Manager
- Session Manager
- Communication Manager
- Avaya G450 Media Gateway
- Avaya Session Border Controller for Enterprise
- Avaya 1600 Series IP Deskphones (H.323)
- Avaya 9600 Series IP Deskphones (H.323 and SIP)
- Avaya A175 Desktop Video Device
- Avaya one-X® Communicator (H.323 and SIP)
- Avaya Flare® Experience for Windows

Located at the edge of the enterprise is the Avaya SBCE. It has a public side that connects to the external network and a private side that connects to the enterprise network. All SIP and RTP traffic entering or leaving the enterprise flows through the Avaya SBCE. In this way, the Avaya SBCE can protect the enterprise against any SIP-based attacks. The Avaya SBCE provides network address translation at both the IP and SIP layers. For security reasons, any actual public IP addresses used in the configuration have been replaced with private IP addresses. Similarly, any references to real routable PSTN numbers have also been changed to numbers that cannot be routed by the PSTN.

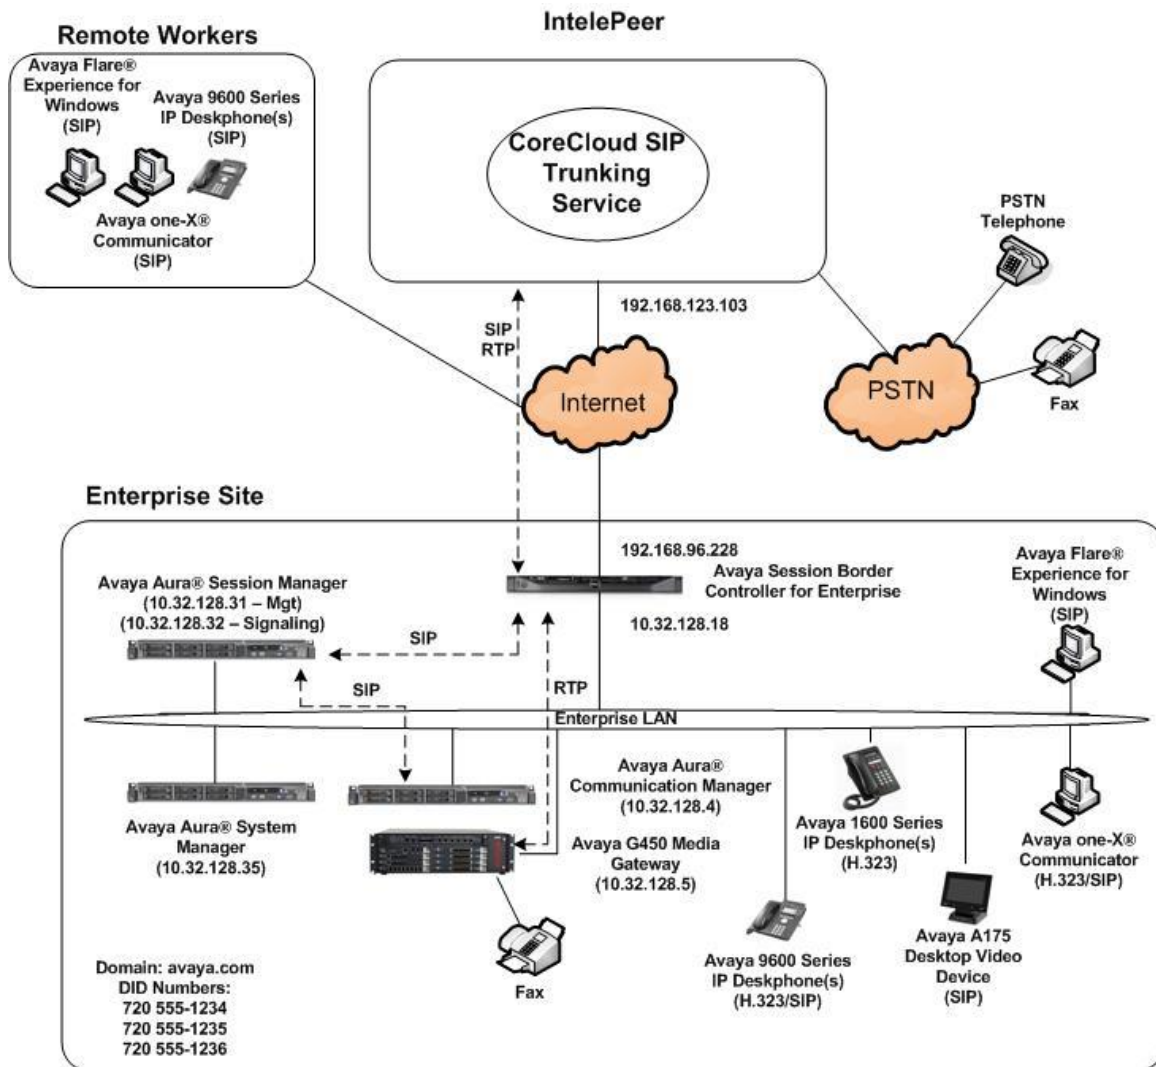

**Figure 1: IntellePeer CoreCloud SIP Trunking Service Test Configuration**

A separate trunk was created between Communication Manager and Session Manager to carry the service provider traffic. This was done so that any trunk or codec setting required by the service provider could be applied only to this trunk and not affect other enterprise SIP traffic. In addition, this trunk carried both inbound and outbound traffic.

For inbound calls, the calls flow from the service provider to the Avaya SBCE then to Session Manager. Session Manager uses the configured dial patterns (or regular expressions) and routing policies to determine the recipient (in this case Communication Manager) and on which link to send the call. Once the call arrives at Communication Manager, further incoming call treatment, such as incoming digit translations and class of service restrictions may be performed.

Outbound calls to the PSTN are first processed by Communication Manager and may be subject to outbound features such as automatic route selection, digit manipulation and class of service restrictions. Once Communication Manager selects the proper SIP trunk, the call is routed to Session Manager. Session Manager once again uses the configured dial patterns (or regular expressions) to determine the route to the Avaya SBCE. From the Avaya SBCE, the call is sent to the IntelPeer CoreCloud SIP Trunking Service.

For the compliance test, the user dialed 11 digits for long distance calls and 10 digits for local calls. For outbound calls from the enterprise, the digits dialed by the user (without the ARS prefix) appeared in the SIP destination headers (Request URI and To) and the 10 digits of the enterprise DID number appeared in the SIP source headers (i.e., From, Contact, and P-Asserted-Identity). For inbound calls, IntelPeer sent 11 digits in the destination headers and 10 digits in the source headers.

## 4. Equipment and Software Validated

The following equipment and software were used for the sample configuration provided:

<b>Avaya IP Telephony Solution Components</b>	
Equipment/Software	Release/Version
Avaya Aura® System Manager running on a HP ProLiant DL360 G7 Server	6.3 SP8 (Build 6.3.0.8.5682-6.3.8.4219) (Software Update Revision 6.3.8.5.2376) System Platform 6.3.4.08007.0
Avaya Aura® Session Manager running on a HP ProLiant DL360 G7 Server	6.3 SP8 (Build 6.3.8.0.638018)
Avaya Aura® Communication Manager running on an Avaya S8300 Server	6.3 SP6 (R016x.03.0.124.0-21591) System Platform 6.3.4.08007.0
Avaya G450 Media Gateway	33.13.0
Avaya Session Border Controller for Enterprise running on a Dell R210 V2 server	6.2.1.Q16
Avaya 1616 IP Deskphone (H.323) running Avaya one-X® Deskphone Value Edition	1.3 SP5 (1.3.5)
Avaya 9641G IP Deskphone (H.323) running Avaya one-X® Deskphone Edition	6.3.1 (S6.3116)
Avaya 9611 IP Deskphone (SIP) running Avaya one-X® Deskphone SIP Edition	6.3.1 (6.3.1.13)
Avaya A175 Desktop Video Device with Avaya Flare® Experience	1.1.3
Avaya one-X® Communicator (H.323 or SIP)	6.2 SP3 (6.2.3.05-FP3)
Avaya Flare® Experience for Windows	1.1.4 (1.1.4.23)
<b>IntelPeer CoreCloud SIP Trunking Service Solution Components</b>	
Equipment/Software	Release/Version
Taqua T7100 Multimedia Controller	3.1.0.24
IntelPeer Super Registry	2.3

**Table 1: Equipment and Software Tested**

The specific configuration above was used for the compliance testing. Note that this solution will be compatible with other Avaya Server and Media Gateway platforms running similar versions of Communication Manager, Session Manager and Avaya Session Border Controller for Enterprise.



## 5. Configure Avaya Aura® Communication Manager

This section describes the procedure for configuring Communication Manager for the IntelPeer CoreCloud SIP Trunking Service. A SIP trunk is established between Communication Manager and Session Manager for use by traffic to and from IntelPeer. It is assumed the general installation of Communication Manager, the Avaya Media Gateway and Session Manager has been previously completed and is not discussed here.

The Communication Manager configuration was performed using the System Access Terminal (SAT). Some screens in this section have been abridged and highlighted for brevity and clarity in presentation. Note that the IP addresses and phone numbers shown throughout these Application Notes have been edited so that the actual public IP addresses of the network elements and public PSTN numbers are not revealed.

### 5.1. Licensing and Capacity

Use the **display system-parameters customer-options** command to verify that the **Maximum Administered SIP Trunks** value on **Page 2** is sufficient to support the desired number of simultaneous SIP calls across all SIP trunks at the enterprise including any trunks to the service provider. The example shows that **4000** SIP trunks are available and **80** are in use. The license file installed on the system controls the maximum values for these attributes. If a required feature is not enabled or there is insufficient capacity, contact an authorized Avaya sales representative to add additional capacity.

display system-parameters customer-options		Page	2 of 11
OPTIONAL FEATURES			
IP PORT CAPACITIES		USED	
	Maximum Administered H.323 Trunks:	4000	36
	Maximum Concurrently Registered IP Stations:	2400	2
	Maximum Administered Remote Office Trunks:	4000	0
	Maximum Concurrently Registered Remote Office Stations:	2400	0
	Maximum Concurrently Registered IP eCons:	68	0
	Max Concur Registered Unauthenticated H.323 Stations:	100	0
	Maximum Video Capable Stations:	2400	1
	Maximum Video Capable IP Softphones:	2400	4
	<b>Maximum Administered SIP Trunks:</b>	<b>4000</b>	<b>80</b>
	Maximum Administered Ad-hoc Video Conferencing Ports:	4000	0

## 5.2. System Features

Use the **change system-parameters features** command to set the **Trunk-to-Trunk Transfer** field to **all** to allow incoming calls from the PSTN to be transferred to another PSTN endpoint. If for security reasons incoming calls should not be allowed to transfer back to the PSTN then leave the field set to **none**.

```
change system-parameters features                               Page 1 of 20
      FEATURE-RELATED SYSTEM PARAMETERS
      Self Station Display Enabled? n
      Trunk-to-Trunk Transfer: all
      Automatic Callback with Called Party Queuing? n
      Automatic Callback - No Answer Timeout Interval (rings): 3
      Call Park Timeout Interval (minutes): 10
      Off-Premises Tone Detect Timeout Interval (seconds): 20
      AAR/ARS Dial Tone Required? y
```

On **Page 9**, verify that a text string has been defined to replace the Calling Party Number (CPN) for restricted or unavailable calls. This text string is entered in the two fields highlighted below. The compliance test used the value of **anonymous** for both.

```
change system-parameters features                               Page 9 of 20
      FEATURE-RELATED SYSTEM PARAMETERS

      CPN/ANI/ICLID PARAMETERS
      CPN/ANI/ICLID Replacement for Restricted Calls: anonymous
      CPN/ANI/ICLID Replacement for Unavailable Calls: anonymous

      DISPLAY TEXT
      Identity When Bridging: principal
      User Guidance Display? n
      Extension only label for Team button on 96xx H.323 terminals? n

      INTERNATIONAL CALL ROUTING PARAMETERS
      Local Country Code:
      International Access Code:

      SCCAN PARAMETERS
      Enable Enbloc Dialing without ARS FAC? n

      CALLER ID ON CALL WAITING PARAMETERS
      Caller ID on Call Waiting Delay Timer (msec): 200
```

## 5.3. IP Node Names

Use the **change node-names ip** command to verify that node names have been previously defined for the IP addresses of the server running Communication Manager (**procr**) and for Session Manager (**sessionMgr**). These node names will be needed for defining the service provider signaling group in **Section 5.6**.

<b>change node-names ip</b>		Page 1 of 2
IP NODE NAMES		
Name	IP Address	
cmm	10.32.128.4	
default	0.0.0.0	
<b>procr</b>	<b>10.32.128.4</b>	
procr6	::	
<b>sessionMgr</b>	<b>10.32.128.32</b>	

## 5.4. Codecs

Use the **change ip-codec-set** command to define a list of codecs to use for calls between the enterprise and the service provider. The list should include the codecs and preferred order defined by the service provider. For the compliance test, codec G.711MU and G.729A was tested using ip-codec-set 3. To configure the codecs, enter the codecs in the **Audio Codec** column of the table in the order of preference. Default values can be used for all other fields.

<b>change ip-codec-set 3</b>		Page 1 of 2
IP Codec Set		
Codec Set: 3		
<b>Audio Codec</b>	Silence Suppression	Frames Per Pkt
1: <b>G.711MU</b>	n	2
2: G.729A	n	2
3:		

On **Page 2**, set the **FAX Mode** to **t.38-G711-fallback**. Not all of IntelPeer's PSTN providers support T.38. This setting will allow fax calls to fallback to G.711 fax if T.38 fax is unavailable. T.38 fax was not able to be tested for interoperability as part of the compliance test.

<b>change ip-codec-set 3</b>		Page 2 of 2
IP CODEC SET		
Allow Direct-IP Multimedia? n		
<b>FAX</b>	<b>Mode</b>	Redundancy
Modem	<b>t.38-G711-fallback</b>	0
TDD/TTY	off	0
H.323 Clear-channel	US	3
	n	0

## 5.5. IP Network Region

Create a separate IP network region for the service provider trunk. This allows for separate codec or quality of service settings to be used (if necessary) for calls between the enterprise and the service provider versus calls within the enterprise or elsewhere. For the compliance test, IP network region 3 was chosen for the service provider trunk. Use the **change ip-network-region 3** command to configure region 3 with the following parameters:

- Set the **Authoritative Domain** field to match the SIP domain of the enterprise. In this configuration, the domain name is **avaya.com**. This name appears in the “From” header of SIP messages originating from this IP region.
- Enter a descriptive name in the **Name** field.
- Enable **IP-IP Direct Audio** (shuffling) to allow audio traffic to be sent directly between IP endpoints without using media resources in the Avaya Media Gateway. Set both **Intra-region** and **Inter-region IP-IP Direct Audio** to **yes**. This is the default setting. Shuffling can be further restricted at the trunk level on the Signaling Group form.
- Set the **Codec Set** field to the IP codec set defined in **Section 5.4**.
- Default values can be used for all other fields.

```
change ip-network-region 3                                     Page 1 of 20

                                IP NETWORK REGION

Region: 3
Location:                      Authoritative Domain: avaya.com
                               Name: SP Region                Stub Network Region: n
MEDIA PARAMETERS              Intra-region IP-IP Direct Audio: yes
                               Codec Set: 3                   Inter-region IP-IP Direct Audio: yes
                               UDP Port Min: 2048              IP Audio Hairpinning? n
                               UDP Port Max: 3329
DIFFSERV/TOS PARAMETERS
Call Control PHB Value: 46
Audio PHB Value: 46
Video PHB Value: 26
802.1P/Q PARAMETERS
Call Control 802.1p Priority: 6
Audio 802.1p Priority: 6
Video 802.1p Priority: 5      AUDIO RESOURCE RESERVATION PARAMETERS
                               RSVP Enabled? n
H.323 IP ENDPOINTS
H.323 Link Bounce Recovery? y
Idle Traffic Interval (sec): 20
Keep-Alive Interval (sec): 5
Keep-Alive Count: 5
```

On **Page 4**, define the IP codec set to be used for traffic between region 3 and region 1. Enter the desired IP codec set in the **codec set** column of the row with destination region (**dst rgn**) **1**. Default values may be used for all other fields. The example below shows the settings used for the compliance test. It indicates that codec set 3 will be used for calls between region 3 (the service provider region) and region 1 (the rest of the enterprise). Creating this table entry for IP network region 3 will automatically create a complementary table entry on the IP network region 1 form for destination region 3. This complementary table entry can be viewed using the **display ip-network-region 1** command and navigating to **Page 4** (not shown).

change ip-network-region 3										Page	4	of	20
Source Region: 3      Inter Network Region Connection Management										I			M
										G	A		t
<b>dst</b>	<b>codec</b>	direct	WAN-BW-limits	Video	Intervening	Dyn	A	G					c
<b>rgn</b>	<b>set</b>	WAN	Units	Total Norm	Prio Shr Regions	CAC	R	L					e
<b>1</b>	<b>3</b>	y	NoLimit				n						t
2													
3	3											all	

## 5.6. Signaling Group

Use the **add signaling-group** command to create a signaling group between Communication Manager and Session Manager for use by the service provider trunk. This signaling group is used for inbound and outbound calls between the service provider and the enterprise. For the compliance test, signaling group 3 was used for this purpose and was configured using the parameters highlighted below.

- Set the **Group Type** field to **sip**.
- Set the **Transport Method** to the recommended default value of **tls** (Transport Layer Security). For ease of troubleshooting during testing, much of the compliance test was conducted with the **Transport Method** set to **tcp**. The transport method specified here is used between Communication Manager and Session Manager. Whatever protocol is used here, it must also be used on the Session Manager entity link defined in **Section 6.6**.
- Set the **IMS Enabled** field to **n**. This specifies Communication Manager will serve as an Evolution Server for Session Manager.
- Set the **Peer Detection Enabled** field to **y**. The **Peer-Server** field will initially be set to **Others** and cannot be changed via administration. Later, the **Peer-Server** field will automatically change to **SM** once Communication Manager detects its peer as a Session Manager.
- Set the **Near-end Node Name** to **procr**. This node name maps to the IP address of the Communication Manager as defined in **Section 5.3**.
- Set the **Far-end Node Name** to **sessionMgr**. This node name maps to the IP address of Session Manager as defined in **Section 5.3**.
- Set the **Near-end Listen Port** and **Far-end Listen Port** to a valid unused port instead of the default well-known port value. (For TLS, the well-known port value is 5061 and for TCP the well-known port value is 5060). At the time of Session Manager installation, a SIP connection between Communication Manager and Session Manager would have been established for use by all Communication Manager SIP traffic using the well-known port

value for TLS or TCP. By creating a new signaling group with a separate port value, a separate SIP connection is created between Communication Manager and Session Manager for SIP traffic to the service provider. As a result, any signaling group or trunk group settings (**Section 5.7**) will only affect the service provider traffic and not other SIP traffic at the enterprise. The compliance test was conducted with the **Near-end Listen Port** and **Far-end Listen Port** set to **5063**.

- Set the **Far-end Network Region** to the IP network region defined for the service provider in **Section 5.5**.
- Set the **Far-end Domain** to the domain of the enterprise.
- Set **Direct IP-IP Audio Connections** to **y**. This field will enable media shuffling on the SIP trunk allowing Communication Manager to redirect media traffic directly between the SIP trunk and the enterprise endpoint.
- Set the **DTMF over IP** field to **rtp-payload**. This value enables Communication Manager to send DTMF transmissions using RFC 2833.
- Set **Initial IP-IP Direct Media** to **n**.
- Set the **Alternate Route Timer** to **15**. This defines the number of seconds that Communication Manager will wait for a response (other than 100 Trying) to an outbound INVITE before selecting another route. If an alternate route is not defined, then the call is cancelled after this interval.
- Default values may be used for all other fields.

[illegible]

## 5.7. Trunk Group

Use the **add trunk-group** command to create a trunk group for the signaling group created in **Section 5.6**. For the compliance test, trunk group 3 was configured using the parameters highlighted below.

- Set the **Group Type** field to **sip**.
- Enter a descriptive name for the **Group Name**.
- Enter an available trunk access code (TAC) that is consistent with the existing dial plan in the **TAC** field.
- Set the **Service Type** field to **public-ntwrk**.
- Set **Member Assignment Method** to **auto**.
- Set the **Signaling Group** to the signaling group shown in the previous step.
- Set the **Number of Members** field to the number of trunk members in the SIP trunk group. This value determines how many simultaneous SIP calls can be supported by this trunk.
- Default values were used for all other fields.

<b>add trunk-group 3</b>		Page 1 of 21	
TRUNK GROUP			
Group Number: 3	<b>Group Type: sip</b>	CDR Reports: y	
<b>Group Name: SP Trunk</b>	COR: 1	TN: 1	<b>TAC: 1003</b>
Direction: two-way	Outgoing Display? n	Night Service:	
Dial Access? n			
Queue Length: 0			
<b>Service Type: public-ntwrk</b>	Auth Code? n		
		<b>Member Assignment Method: auto</b>	
		<b>Signaling Group: 3</b>	
		<b>Number of Members: 10</b>	

On **Page 2**, the **Redirect On OPTIM Failure** value is the amount of time (in milliseconds) that Communication Manager will wait for a response (other than 100 Trying) to a pending INVITE sent to an EC500 remote endpoint before selecting another route. If another route is not defined, then the call is cancelled after this interval. This time interval should be set to a value equal to the **Alternate Route Timer** on the signaling group form described in **Section 5.6**.

Verify that the **Preferred Minimum Session Refresh Interval** is set to a value acceptable to the service provider. This value defines the interval that re-INVITEs must be sent to keep the active session alive. For the compliance test, the value of **900** seconds was used.

```

add trunk-group 3                                     Page 2 of 21
  Group Type: sip

TRUNK PARAMETERS

  Unicode Name: auto

                                Redirect On OPTIM Failure: 15000

  SCCAN? n                                Digital Loss Group: 18
                                Preferred Minimum Session Refresh Interval(sec): 900

  Disconnect Supervision - In? y Out? y

                                XOIP Treatment: auto    Delay Call Setup When Accessed Via IGAR? n

```

On **Page 3**, set the **Numbering Format** field to **private**. This field specifies the format of the calling party number (CPN) sent to the far-end. Beginning with Communication Manager 6.0, public numbers are automatically preceded with a + sign (E.164 numbering format) when passed in the SIP From, Contact and P-Asserted Identity headers. To remove the + sign, the **Numbering Format** was set to **private** and the **Numbering Format** in the route pattern was set to **unk-unk** (see **Section 5.9**).

Set the **Replace Restricted Numbers** and **Replace Unavailable Numbers** fields to **y**. This will allow the CPN displayed on local endpoints to be replaced with the value set in **Section 5.2**, if the inbound call enabled CPN block. For outbound calls, these same settings request that CPN block be activated on the far-end destination if a local user requests CPN block on a particular call routed out this trunk. Default values were used for all other fields.

```

add trunk-group 3                                     Page 3 of 21
TRUNK FEATURES
  ACA Assignment? n                                Measured: none                                Maintenance Tests? y

                                Numbering Format: private                                UI Treatment: service-provider

                                Replace Restricted Numbers? y
                                Replace Unavailable Numbers? y

                                Modify Tandem Calling Number: no

  Show ANSWERED BY on Display? y

  DSN Term? n                                SIP ANAT Supported? N

```



On **Page 4**, since IntelPeer does not support the SIP REFER method with a Replaces parameter then the **Network Call Redirection** field must be set to **n**. Set the **Send Diversion Header** field to **y** and the **Support Request History** field to **n**. The **Send Diversion Header** field provides additional information to the network if the call has been redirected. These settings are needed to support call forwarding of inbound calls back to the PSTN and some Extension to Cellular (EC500) call scenarios.

Set the **Telephone Event Payload Type** to **101**, the value used by IntelPeer.

<b>add trunk-group 3</b>	<b>Page 4 of 21</b>
PROTOCOL VARIATIONS	
Mark Users as Phone? n	
Prepend '+' to Calling/Alerting/Diverting/Connected Number? n	
Send Transferring Party Information? n	
<b>Network Call Redirection? n</b>	
<b>Send Diversion Header? y</b>	
<b>Support Request History? n</b>	
<b>Telephone Event Payload Type: 101</b>	
Convert 180 to 183 for Early Media? n	
Always Use re-INVITE for Display Updates? n	
Identity for Calling Party Display: P-Asserted-Identity	
Block Sending Calling Party Location in INVITE? n	
Accept Redirect to Blank User Destination? n	
Enable Q-SIP? n	

## 5.8. Calling Party Information

The calling party number is sent in the SIP “From”, “Contact” and “PAI” headers. Since private numbering was selected to define the format of this number (**Section 5.7**), use the **change private-numbering** command to create an entry for each extension which has a DID assigned. The DID number will be assigned by the SIP service provider. It is used to authenticate the caller.

In the sample configuration, three DID numbers were assigned for testing. These three numbers were assigned to the three extensions 40006, 40008, and 40022. Thus, these same 10-digit numbers were used in the outbound calling party information on the service provider trunk when calls were originated from these extensions.

change private-numbering 5					Page 1 of 2
NUMBERING - PRIVATE FORMAT					
Ext Len	Ext Code	Trk Grp (s)	Private Prefix	Total Len	
5	4			5	Total Administered: 4
5	40006	3	7205551234	10	Maximum Entries: 540
5	40008	3	7205551235	10	
5	40022	3	7205551236	10	

In a real customer environment, normally the DID number is comprised of the local extension plus a prefix. If this is true, then a single private numbering entry can be applied for all extensions. In the example below, all stations with a 5-digit extension beginning with 4 will send the calling party number as the **Private Prefix** plus the extension number.

change private-numbering 5					Page 1 of 2
NUMBERING - PRIVATE FORMAT					
Ext Len	Ext Code	Trk Grp (s)	Private Prefix	Total Len	
5	4			5	Total Administered: 2
5	4	3	72055	10	Maximum Entries: 540

## 5.9. Outbound Routing

In these Application Notes, the Automatic Route Selection (ARS) feature is used to route outbound calls via the SIP trunk to the service provider. In the sample configuration, the single digit 9 is used as the ARS access code. Enterprise callers will dial 9 to reach an “outside line”. This common configuration is illustrated below with little elaboration. Use the **change dialplan analysis** command to define a dialed string beginning with 9 of length 1 as a feature access code (**fac**).

change dialplan analysis			DIAL PLAN ANALYSIS TABLE						Page 1 of 12
			Location: all			Percent Full: 3			
Dialed String	Total Length	Call Type	Dialed String	Total Length	Call Type	Dialed String	Total Length	Call Type	
1	4	dac							
3	5	ext							
4	5	ext							
8	1	fac							
<b>9</b>	<b>1</b>	<b>fac</b>							
*	3	fac							
#	3	fac							

Use the **change feature-access-codes** command to configure **9** as the **Auto Route Selection (ARS) – Access Code 1**.

change feature-access-codes			FEATURE ACCESS CODE (FAC)						Page 1 of 11
Abbreviated Dialing List1 Access Code:									
Abbreviated Dialing List2 Access Code:									
Abbreviated Dialing List3 Access Code:									
Abbreviated Dial - Prgm Group List Access Code:									
Announcement Access Code:									
Answer Back Access Code:									
Attendant Access Code:									
Auto Alternate Routing (AAR) Access Code: 8									
<b>Auto Route Selection (ARS) - Access Code 1: 9</b>						Access Code 2:			
Automatic Callback Activation:						Deactivation:			
Call Forwarding Activation Busy/DA: *01 All: *02						Deactivation: *03			
Call Forwarding Enhanced Status: Act:						Deactivation:			

Use the **change ars analysis** command to configure the routing of dialed digits following the first digit 9. The example below shows a subset of the dialed strings tested as part of the compliance test. See **Section 2.1** for the complete list of call types tested. All dialed strings are mapped to route pattern **2** which contains the SIP trunk to the service provider (as defined next).

change ars analysis 0			ARS DIGIT ANALYSIS TABLE				Page 1 of 2
			Location: all				Percent Full: 1
	Dialed String	Total Min	Total Max	Route Pattern	Call Type	Node Num	ANI Req'd
0		1	1	2	op		n
0		11	11	2	op		n
011		10	18	2	intl		n
1720		11	11	2	natl		n
1732		11	11	2	natl		n
1800		11	11	2	natl		n
1877		11	11	2	natl		n
1908		11	11	2	natl		n
411		3	3	2	svcl		n
720555		10	10	2	natl		n

The route pattern defines which trunk group will be used for an outgoing call and performs any necessary digit manipulation. Use the **change route-pattern** command to configure the parameters for the service provider route pattern in the following manner. The example below shows the values used for route pattern 2 during the compliance test.

- **Pattern Name:** Enter a descriptive name.
- **Grp No:** Enter the outbound trunk group for the SIP service provider. For the compliance test, trunk group **3** was used.
- **FRL:** Set the Facility Restriction Level (**FRL**) field to a level that allows access to this trunk for all users that require it. The value of **0** is the least restrictive level.
- **Numbering Format:** **unk-unk** All calls using this route pattern will use the private numbering table. See setting of the **Numbering Format** in the trunk group form for full details in **Section 5.7**.
- **LAR:** **next**

change route-pattern 2															Page 1 of 3		
Pattern Number: 4															Pattern Name: SP Route		
SCCAN? n															Secure SIP? n		
Grp	FRL	NPA	Pfx	Hop	Toll	No.	Inserted								DCS/	IXC	
No			Mrk	Lmt	List	Del	Digits								QSIG		
								Dgts								Intw	
1:	3	0													n	user	
2:															n	user	
3:															n	user	
4:															n	user	
5:															n	user	
6:															n	user	
BCC		VALUE		TSC	CA-TSC	ITC		BCIE	Service/Feature		PARM	No.	Numbering	LAR			
0	1	2	M	4	W	Request						Dgts	Format				
													Subaddress				
1:	y	y	y	y	y	n	n	rest				unk-unk	next				
2:	y	y	y	y	y	n	n	rest					none				
3:	y	y	y	y	y	n	n	rest					none				
4:	y	y	y	y	y	n	n	rest					none				
5:	y	y	y	y	y	n	n	rest					none				
6:	y	y	y	y	y	n	n	rest					none				

## 6. Configure Avaya Aura® Session Manager


This section provides the procedures for configuring Session Manager. The procedures include configuring the following items:

- SIP Domain
- Location
- Adaptation Modules
- SIP Entities
- Entity Links
- Routing Policies
- Dial Patterns
- Session Manager


It may not be necessary to create all the items above when creating a connection to the service provider since some of these items would have already been defined as part of the initial Session Manager installation. This includes items such as certain SIP Domains, Locations, SIP Entities, and Session Manager itself. However, each item should be reviewed to verify the configuration.

## 6.1. Avaya Aura® System Manager Login and Navigation

Session Manager configuration is accomplished by accessing the browser-based GUI of System Manager, using the URL “https://<ip-address>/SMGR”, where “<ip-address>” is the IP address of System Manager. Log in with the appropriate credentials and click on **Log on** (not shown). The following page is displayed. The links displayed below will be referenced in subsequent sections to navigate to items requiring configuration. Most items will be located under the **Elements** → **Routing** link highlighted below.

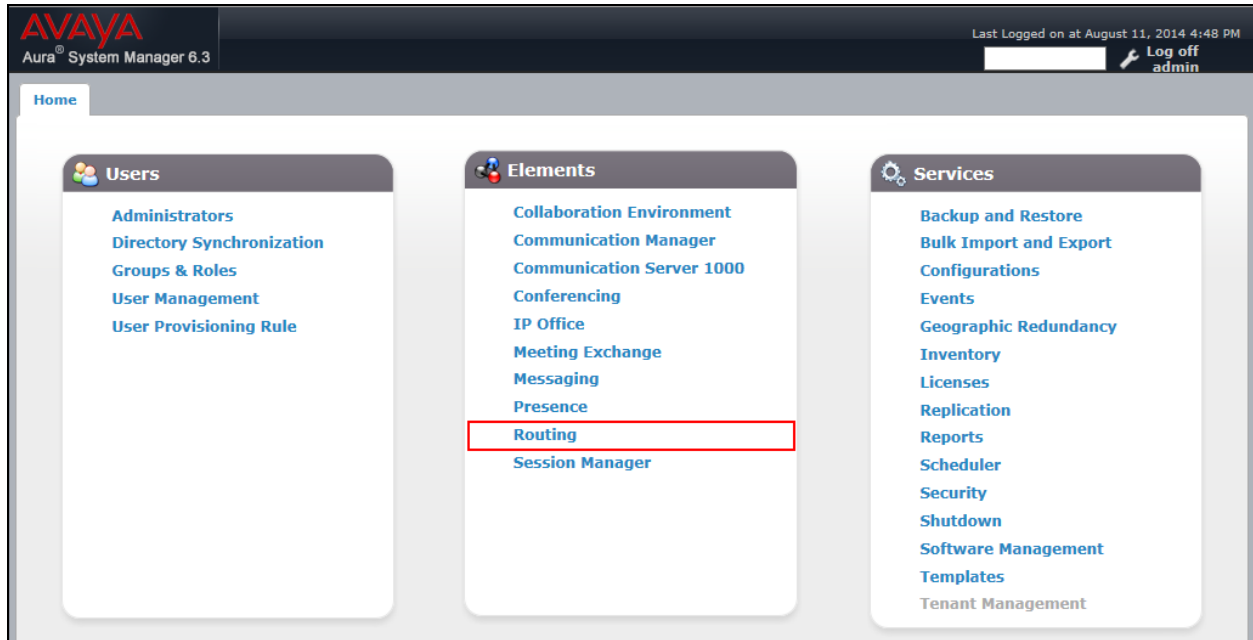

Clicking the **Elements** → **Routing** link, displays the **Introduction to Network Routing Policy** page. In the left-hand pane is a navigation tree containing many of the items to be configured in the following sections.

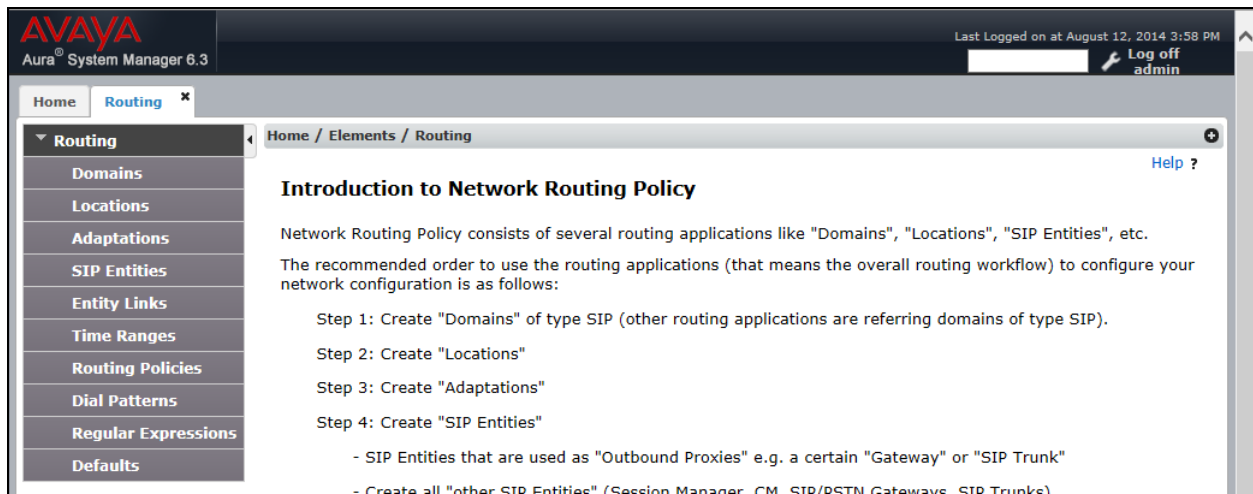




## 6.2. Specify SIP Domain

Create a SIP Domain for each domain for which Session Manager will need to be aware in order to route calls. For the compliance test, this includes the enterprise domain (**avaya.com**) as defined in **Section 5.6**. Navigate to **Routing → Domains** in the left-hand navigation pane (**Section 6.1**) and click the **New** button in the right pane (not shown). In the new right pane that appears (shown below), fill in the following:

- **Name:** Enter the domain name.
- **Type:** Select **sip** from the pull-down menu.
- **Notes:** Add a brief description (optional).

Click **Commit**. The screen below shows the entry for the enterprise domain.

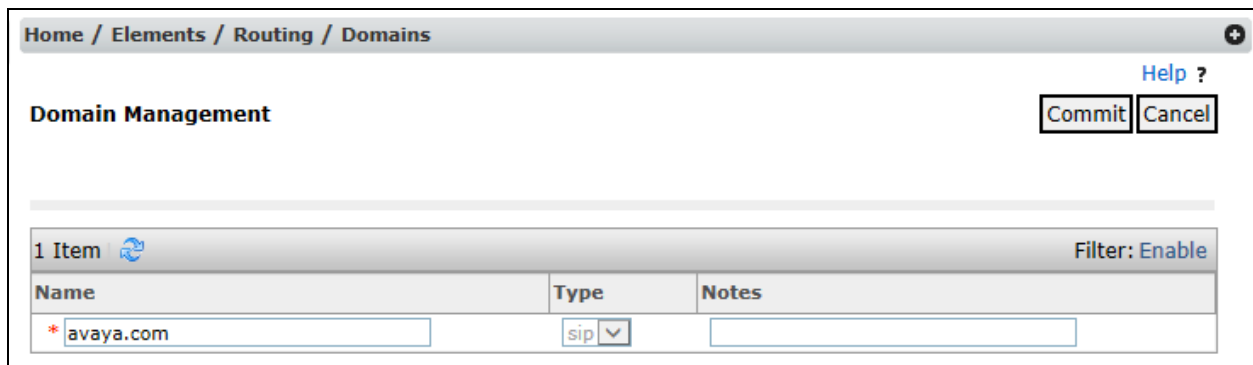

The screenshot shows a web interface for "Domain Management". At the top, there is a breadcrumb trail: "Home / Elements / Routing / Domains". Below this, the title "Domain Management" is displayed. To the right of the title are two buttons: "Commit" and "Cancel", and a "Help ?" link. Below the title bar, there is a table with one item. The table has three columns: "Name", "Type", and "Notes". The "Name" column contains the text "\* avaya.com". The "Type" column contains a pull-down menu with "sip" selected. The "Notes" column is empty. Above the table, there is a status bar that says "1 Item" and a "Filter: Enable" link.

Name	Type	Notes
* avaya.com	sip	

### 6.3. Add Location

Locations can be used to identify logical and/or physical locations where SIP Entities reside for purposes of bandwidth management and call admission control. A single Location was defined for the enterprise even though multiple subnets were used. The screens below show the addition of the Location named **VNJ Lab**, which includes all equipment at the enterprise including Communication Manager, Session Manager and the Avaya SBCE.

To add a Location, navigate to **Routing → Locations** in the left-hand navigation pane (**Section 6.1**) and click the **New** button in the right pane (not shown). In the new right pane that appears (shown below), fill in the following:

In the **General** section, enter the following values. Use default values for all remaining fields.

- **Name:** Enter a descriptive name for the Location.
- **Notes:** Add a brief description (optional).

Home / Elements / Routing / Locations

Location Details

Help ?

Commit Cancel

General

\* Name: VNJ Lab

Notes:

Scroll down to the **Location Pattern** section. Click **Add** and enter the following values. Use default values for all remaining fields.

- **IP Address Pattern:** Add all IP address patterns used to identify the location.
- **Notes:** Add a brief description (optional).

Click **Commit** to save.

Location Pattern

Add Remove

2 Items Filter: Enable

<input type="checkbox"/>	IP Address Pattern	Notes
<input type="checkbox"/>	* 10.32.120.x	
<input type="checkbox"/>	* 10.32.128.x	

Select : All, None

Commit Cancel

## 6.4. Add Adaptation

Session Manager can be configured with Adaptations that can modify SIP messages before or after routing decisions have been made or perform digit manipulation. A generic Adaptation **DigitConversionAdapter** supports digit conversion of telephone numbers in specific headers of SIP messages. Other Adaptations are built on this generic, and can modify other headers to permit interoperability with third party SIP products.

For the compliance test, one Adaptation was used. The Adaptation was applied to the Communication Manager SIP Entity and performs the following:

- Mapping inbound DID numbers from IntelPeer to local Communication Manager extensions.

To create the Adaptation that will be applied to the Communication Manager SIP Entity, navigate to **Routing → Adaptations** in the left-hand navigation pane and click on the **New** button in the right pane (not shown). In the new right pane that appears (shown below), fill in the following:

In the **General** section, enter the following values. Use default values for all remaining fields.

- **Adaptation name:** Enter a descriptive name for the Adaptation.
- **Module name:** Select **DigitConversionAdapter** from the drop-down menu.
- **Module Parameter Type:** Leave blank.
- **Notes:** Enter a description (optional).

Home / Elements / Routing / Adaptations

Adaptation Details

Commit Cancel

Help ?

**General**

\* Adaptation Name: PRT-CM-Trk3-Adapt

Module Name: DigitConversionAdapter

Module Parameter Type:

Egress URI Parameters:

Notes:

To map inbound DID numbers from IntelPeer to Communication Manager extensions, scroll down to the **Digit Conversion for Outgoing Calls from SM** section. Create an entry for each DID to be mapped. Click **Add** and enter the following values for each mapping. Use default values for all remaining fields.

- **Matching Pattern:** Enter a digit string used to match the inbound DID number.
- **Min:** Enter a minimum dialed number length used in the match criteria.
- **Max:** Enter a maximum dialed number length used in the match criteria.
- **Delete Digits** Enter the number of digits to delete from the beginning of the received number.
- **Insert Digits:** Enter the digits to insert at the beginning of the received number.
- **Address to modify:** Select **destination** since this digit conversion only applies to the destination number.

Click **Commit** to save.

### Digit Conversion for Outgoing Calls from SM

Add

Remove

3 Items

Filter: Enable

<input type="checkbox"/>	Matching Pattern ▲	Min	Max	Phone Context	Delete Digits	Insert Digits	Address to modify	Adaptation Dat
<input type="checkbox"/>	*17205551234	*11	*11		*11	40006	destination ▼	
<input type="checkbox"/>	*17205551235	*11	*11		*11	40022	destination ▼	
<input type="checkbox"/>	*17205551236	*11	*11		*11	40008	destination ▼	

<

>

Select : All, None

In a real customer environment, often the DID number is comprised of the local extension plus a prefix. If this is true, then a single digit conversion entry can be created for all extensions. In the example below, a 6 digit prefix is deleted from each incoming DID number leaving a 5 digit extension to be routed by Session Manager.

### Digit Conversion for Outgoing Calls from SM

Add

Remove

1 Item

Filter: Enable

<input type="checkbox"/>	Matching Pattern ▲	Min	Max	Phone Context	Delete Digits	Insert Digits	Address to modify	Adaptation Dat
<input type="checkbox"/>	*172055	*11	*11		*6		destination ▼	

<

>

Select : All, None

## 6.5. Add SIP Entity

A SIP Entity must be added for Session Manager and for each SIP telephony system connected to Session Manager which includes Communication Manager and the Avaya SBCE. Navigate to **Routing → SIP Entities** in the left-hand navigation pane (**Section 6.1**) and click on the **New** button in the right pane (not shown). In the new right pane that appears (shown below), fill in the following:

In the **General** section, enter the following values. Use default values for all remaining fields.

- **Name:** Enter a descriptive name.
- **FQDN or IP Address:** Enter the FQDN or IP address of the SIP Entity that is used for SIP signaling.
- **Type:** Enter **Session Manager** for Session Manager, **CM** for Communication Manager and **SIP Trunk** for the Avaya SBCE.
- **Adaptation:** This field is only present if **Type** is not set to **Session Manager**. If applicable, select the appropriate **Adaptation name** created in **Section 6.4** that will be applied to this entity.
- **Location:** Select the Location that applies to the SIP Entity being created. For the compliance test, all components were located in Location **VNJ Lab** created in **Section 6.3**.
- **Time Zone:** Select the time zone where the server is located.

The following screen shows the addition of Session Manager. The IP address of the virtual SM-100 Security Module is entered for **FQDN or IP Address**.

The screenshot shows the 'SIP Entity Details' form in the Avaya Session Manager configuration interface. The breadcrumb navigation at the top reads 'Home / Elements / Routing / SIP Entities'. The form is titled 'SIP Entity Details' and has a 'Help ?' link and 'Commit' and 'Cancel' buttons in the top right corner. The 'General' section contains the following fields: 'Name' (required, value: 'Pkway-SM'), 'FQDN or IP Address' (required, value: '10.32.128.32'), 'Type' (dropdown menu, value: 'Session Manager'), 'Notes' (text area, value: 'Parkway'), 'Location' (dropdown menu, value: 'VNJ Lab'), 'Outbound Proxy' (dropdown menu, value: ''), 'Time Zone' (dropdown menu, value: 'America/New\_York'), and 'Credential name' (text area, value: ''). The 'SIP Link Monitoring' section contains a dropdown menu with the value 'Use Session Manager Configuration'.

Field	Value
Name	Pkway-SM
FQDN or IP Address	10.32.128.32
Type	Session Manager
Notes	Parkway
Location	VNJ Lab
Outbound Proxy	
Time Zone	America/New_York
Credential name	
SIP Link Monitoring	Use Session Manager Configuration

To define the ports used by Session Manager, scroll down to the **Port** section of the **SIP Entity Details** screen. This section is only present for **Session Manager** SIP Entities.

In the **Port** section, click **Add** and enter the following values. Use default values for all remaining fields:

- **Port:** Port number on which Session Manager can listen for SIP requests.
- **Protocol:** Transport protocol to be used with this port.
- **Default Domain:** The default domain associated with this port. For the compliance test, this was the enterprise SIP domain.


Defaults can be used for the remaining fields. Click **Commit** to save.

For the compliance test, four port entries were used. The first three are the standard ports used for SIP traffic: port 5060 for UDP/TCP and port 5061 for TLS. These ports were provisioned as part of the Session Manager installation not covered by this document. In addition, port 5063 defined in **Section 5.6** for use with service provider SIP traffic between Communication Manager and Session Manager was added to the list.

**Port**

TCP Failover port:

TLS Failover port:

6 Items 

Filter: [Enable](#)

<input type="checkbox"/>	Port	Protocol	Default Domain	Notes
<input type="checkbox"/>	<input type="text" value="5060"/>	<input type="text" value="TCP"/>	<input type="text" value="avaya.com"/>	<input type="text"/>
<input type="checkbox"/>	<input type="text" value="5060"/>	<input type="text" value="UDP"/>	<input type="text" value="avaya.com"/>	<input type="text"/>
<input type="checkbox"/>	<input type="text" value="5061"/>	<input type="text" value="TLS"/>	<input type="text" value="avaya.com"/>	<input type="text"/>
<input type="checkbox"/>	<input type="text" value="5063"/>	<input type="text" value="TLS"/>	<input type="text" value="avaya.com"/>	<input type="text"/>

Select : [All](#), [None](#)

The following screen shows the addition of Communication Manager. In order for Session Manager to send SIP service provider traffic on a separate entity link to Communication Manager, this requires the creation of a separate SIP Entity for Communication Manager other than the one created at Session Manager installation for use with all other SIP traffic. The **FQDN or IP Address** field is set to the IP address of Communication Manager. For the **Adaptation** field, select the Adaptation previously defined for dial plan digit manipulation in **Section 6.4**. The **Location** field is set to **VNJ Lab** which is the Location defined for the subnet where Communication Manager resides. See **Section 6.3**.

The screenshot shows a web interface for configuring SIP Entities. The breadcrumb navigation at the top reads "Home / Elements / Routing / SIP Entities". The page title is "SIP Entity Details". In the top right corner, there is a "Help ?" link and two buttons: "Commit" and "Cancel".

The configuration is organized into sections:

- General**
  - Name:** PRT-CM-Trk3
  - \* FQDN or IP Address:** 10.32.128.4
  - Type:** CM (dropdown menu)
  - Notes:** (empty text field)
  - Adaptation:** PRT-CM-Trk3-Adapt (dropdown menu)
  - Location:** VNJ Lab (dropdown menu)
  - Time Zone:** America/New\_York (dropdown menu)
  - \* SIP Timer B/F (in seconds):** 4
  - Credential name:** (empty text field)
  - Call Detail Recording:** none (dropdown menu)
- Loop Detection**
  - Loop Detection Mode:** Off (dropdown menu)
- SIP Link Monitoring**
  - SIP Link Monitoring:** Use Session Manager Configuration (dropdown menu)

The following screen shows the addition of the Avaya SBCE. The **FQDN or IP Address** field is set to the IP address of its private network interface (see **Figure 1**). The **Location** field is set to **VNJ Lab** which is the Location defined for the subnet where the Avaya SBCE resides.

[Home](#) / [Elements](#) / [Routing](#) / [SIP Entities](#)

[Help ?](#)

**SIP Entity Details**

Commit

Cancel

**General**

\* Name:

VNJ-SBCE1

\* FQDN or IP Address:

10.32.128.18

Type:

SIP Trunk

Notes:

Adaptation:

Location:

VNJ Lab

Time Zone:

America/New\_York

\* SIP Timer B/F (in seconds):

4

Credential name:

Call Detail Recording:

egress

**Loop Detection**

Loop Detection Mode:

Off

**SIP Link Monitoring**

SIP Link Monitoring:

Link Monitoring Enabled



## 6.6. Add Entity Links

A SIP trunk between Session Manager and a telephony system is described by an Entity Link. Two Entity Links were created: one to Communication Manager for use only by service provider traffic and one to the Avaya SBCE. To add an Entity Link, navigate to **Routing → Entity Links** in the left-hand navigation pane (**Section 6.1**) and click on the **New** button in the right pane (not shown). In the new right pane that appears (shown below), fill in the following:

- **Name:** Enter a descriptive name.
- **SIP Entity 1:** Select the Session Manager SIP Entity.
- **Protocol:** Select the transport protocol used for this link. This must match the protocol used in the Communication Manager signaling group in **Section 5.7**.
- **Port:** Port number on which Session Manager will receive SIP requests from the far-end. For the Communication Manager Entity Link, this must match the **Far-end Listen Port** defined on the Communication Manager signaling group in **Section 5.7**.
- **SIP Entity 2:** Select the name of the other system. For the Communication Manager Entity Link, select the Communication Manager SIP Entity defined in **Section 6.5**.
- **Port:** Port number on which the other system receives SIP requests from Session Manager. For the Communication Manager Entity Link, this must match the **Near-end Listen Port** defined on the Communication Manager signaling group in **Section 5.7**.
- **Connection Policy:** Select **trusted** from pull-down menu.

Click **Commit** to save. The following screen illustrates the Entity Link to Communication Manager (**PRT-Trk3-Link**). The protocol and ports defined here must match the values used on the Communication Manager signaling group form in **Section 5.7**.

Home / Elements / Routing / Entity Links

Entity Links

Commit Cancel

1 Item Filter: Enable

<input type="checkbox"/>	Name	SIP Entity 1	Protocol	Port	SIP Entity 2	DNS Override	Port	Connection Policy	Deny New Service	Notes
<input type="checkbox"/>	*PRT-Trk3-Link	*Pkway-SM	TLS	*5063	*PRT-CM-Trk3	<input type="checkbox"/>	*5063	trusted	<input type="checkbox"/>	

Select : All, None

The following screen illustrates the Entity Link to the Avaya SBCE (**VNJ-SBCE1-Link**).

Home / Elements / Routing / Entity Links

Entity Links

Commit

Cancel

1 Item

Filter: Enable

<input type="checkbox"/>	Name	SIP Entity 1	Protocol	Port	SIP Entity 2	DNS Override	Port	Connection Policy	Deny New Service	Notes
<input type="checkbox"/>	* VNJ-SBCE1-Link	* Pkway-SM	TCP	* 5060	* VNJ-SBCE1	<input type="checkbox"/>	* 5060	trusted	<input type="checkbox"/>	

Select : All, None

## 6.7. Add Routing Policies

Routing Policies describe the conditions under which calls will be routed to the SIP Entities specified in **Section 6.5**. Two Routing Policies must be added: one for Communication Manager and one for the Avaya SBCE. To add a Routing Policy, navigate to **Routing → Routing Policies** in the left-hand navigation pane (**Section 6.1**) and click on the **New** button in the right pane (not shown). In the new right pane that appears (shown below), fill in the following:

In the **General** section, enter the following values. Use default values for all remaining fields.

- **Name:** Enter a descriptive name.
- **Notes:** Add a brief description (optional).

In the **SIP Entity as Destination** section, click **Select**. The **SIP Entity List** page opens (not shown). Select the appropriate SIP Entity to which this Routing Policy applies and click **Select**. The selected SIP Entity displays on the **Routing Policy Details** page as shown below. Use default values for remaining fields. Click **Commit** to save.

The following screen shows the Routing Policy for Communication Manager.

Home / Elements / Routing / Routing Policies

Routing Policy Details

Commit Cancel Help ?

**General**

\* Name: PRT-CM-Trk3-RP

Disabled: ☐

\* Retries: 0

Notes:

**SIP Entity as Destination**

Select

Name	FQDN or IP Address	Type	Notes
PRT-CM-Trk3	10.32.128.4	CM	

The following screen shows the Routing Policy for the Avaya SBCE.

Home / Elements / Routing / Routing Policies

Help ?

Routing Policy Details

CommitCancel

General

\* Name: VNJ-SBCE1-RP

Disabled: ☐

\* Retries: 0

Notes:

SIP Entity as Destination

Select

Name	FQDN or IP Address	Type	Notes
VNJ-SBCE1	10.32.128.18	SIP Trunk	

## 6.8. Add Dial Patterns

Dial Patterns are needed to route calls through Session Manager. For the compliance test, Dial Patterns were needed to route calls from Communication Manager to IntelPeer and vice versa. Dial Patterns define which Route Policy will be selected for a particular call based on the dialed digits, destination domain and originating location. To add a Dial Pattern, navigate to **Routing → Dial Patterns** in the left-hand navigation pane (**Section 6.1**) and click on the **New** button in the right pane (not shown). In the new right pane that appears (shown below), fill in the following:

In the **General** section, enter the following values. Use default values for all remaining fields.

- **Pattern:** Enter a dial string that will be matched against the Request-URI of the call.
- **Min:** Enter a minimum length used in the match criteria.
- **Max:** Enter a maximum length used in the match criteria.
- **SIP Domain:** Enter the destination domain used in the match criteria.
- **Notes:** Add a brief description (optional).

In the **Originating Locations and Routing Policies** section, click **Add**. From the **Originating Locations and Routing Policy List** that appears (not shown), select the appropriate originating location for use in the match criteria. Lastly, select the Routing Policy from the list that will be used to route all calls that match the specified criteria. Click **Select**.

Default values can be used for the remaining fields. Click **Commit** to save.

Three examples of the Dial Patterns used for the compliance test are shown below. The first example shows that outbound long distance numbers (11 digits) that begin with **1** and have a destination domain of **avaya.com** from **ALL** locations use route policy **VNJ-SBCE1-RP**.

Home / Elements / Routing / Dial Patterns

Dial Pattern Details
Commit Cancel

General

\* Pattern: 1

\* Min: 11

\* Max: 11

Emergency Call: ☐

Emergency Priority: 1

Emergency Type:

SIP Domain: avaya.com

Notes:

Originating Locations and Routing Policies

Add Remove

1 Item
Filter: Enable

<input type="checkbox"/>	Originating Location Name ▲	Originating Location Notes	Routing Policy Name	Rank	Routing Policy Disabled	Routing Policy Destination	Routing Policy Notes
<input type="checkbox"/>	-ALL-		VNJ-SBCE1-RP	0	<input type="checkbox"/>	VNJ-SBCE1	

Select : All, None

The second example shows that outbound local 10 digit numbers that start with a **7** to domain **avaya.com** and originating from **ALL** locations use route policy **VNJ-SBCE1-RP**.

Home / Elements / Routing / Dial Patterns

Dial Pattern Details

Commit Cancel

Help ?

General

\* Pattern: 7xxxxxxxxx

\* Min: 10

\* Max: 10

Emergency Call:

Emergency Priority: 1

Emergency Type:

SIP Domain: avaya.com

Notes: 10 digit local dialing

Originating Locations and Routing Policies

Add Remove

1 Item

Filter: Enable

<input type="checkbox"/>	Originating Location Name ▲	Originating Location Notes	Routing Policy Name	Rank	Routing Policy Disabled	Routing Policy Destination	Routing Policy Notes
<input type="checkbox"/>	-ALL-		VNJ-SBCE1 -RP	0	<input type="checkbox"/>	VNJ-SBCE1	

Select : All, None

The third example shows that incoming 10 digit numbers that start with **1720555123** to domain **avaya.com** and originating from **ALL** locations use route policy **PRT-CM-Trk3-RP**. These are the DID numbers assigned to the enterprise from IntelPeer. All other Dial Patterns used as part of the compliance test were configured in a similar manner.

Home / Elements / Routing / Dial Patterns

Help ?

Dial Pattern Details

Commit Cancel

General

\* Pattern: 1720555123

\* Min: 11

\* Max: 11

Emergency Call: ☐

Emergency Priority: 1

Emergency Type:

SIP Domain: avaya.com

Notes: Intelpeer DID

Originating Locations and Routing Policies

Add Remove

1 Item

Filter: Enable

<input type="checkbox"/>	Originating Location Name ▲	Originating Location Notes	Routing Policy Name	Rank	Routing Policy Disabled	Routing Policy Destination	Routing Policy Notes
<input type="checkbox"/>	-ALL-		PRT-CM-Trk3-RP	0	<input type="checkbox"/>	PRT-CM-Trk3	

Select : All, None



## 6.9. Add/View Session Manager

The creation of a Session Manager element provides the linkage between System Manager and Session Manager. This was most likely done as part of the initial Session Manager installation. To add a Session Manager, from the **Home** page, navigate to **Elements → Session Manager → Session Manager Administration** in the left-hand navigation pane (**Section 6.1**) and click on the **New** button in the right pane (not shown). If the Session Manager already exists, select the appropriate Session Manager and click **View** (not shown) to view the configuration. Enter/verify the data as described below and shown in the following screen:

In the **General** section, enter the following values:

- **SIP Entity Name:** Select the SIP Entity created for Session Manager.
- **Description:** Add a brief description (optional).
- **Management Access Point Host Name/IP:** Enter the host name or IP address of the Session Manager management interface.

The screen below shows the Session Manager values used for the compliance test.

The screenshot shows the 'View Session Manager' configuration page. The breadcrumb navigation at the top reads 'Home / Elements / Session Manager / Session Manager Administration'. A 'Help ?' link is in the top right corner. The page title is 'View Session Manager', and a 'Return' button is located to its right. Below the title is a horizontal menu with links: 'General | Security Module | NIC Bonding | Monitoring | CDR | Personal Profile Manager (PPM) - Connection Settings | Event Server |'. Below this menu are links for 'Expand All' and 'Collapse All'. The 'General' section is expanded, showing the following fields: 'SIP Entity Name' with the value 'Pkway-SM', 'Description' (empty), 'Management Access Point Host Name/IP' with the value '10.32.128.31', 'Direct Routing to Endpoints' with a value of 'Enable', and 'VMware Virtual Machine' with an unchecked checkbox.

In the **Security Module** section, enter the following values:

- **SIP Entity IP Address:** Should be filled in automatically based on the SIP Entity Name. Otherwise, enter the IP address of the Session Manager signaling interface.
- **Network Mask:** Enter the network mask corresponding to the IP address of Session Manager.
- **Default Gateway:** Enter the IP address of the default gateway for Session Manager.

Use default values for the remaining fields. Click **Save** (not shown) to add this Session Manager. The screen below shows the remaining Session Manager values used for the compliance test.

The screenshot displays the 'Security Module' configuration window. It contains the following fields and values:

Field	Value
SIP Entity IP Address	10.32.128.32
Network Mask	255.255.255.0
Default Gateway	10.32.128.254
Call Control PHB	46
QOS Priority	6
Speed & Duplex	Auto
VLAN ID	
*SIP Firewall Configuration	Pkwy-SM Rule Set


## 7. Configure Avaya Session Border Controller for Enterprise

This section describes the configuration of the Avaya SBCE. It is assumed that the initial installation of the Avaya SBCE has been completed including the assignment of a management IP address. The management interface **must** be provisioned on a different subnet than either the Avaya SBCE private or public network interfaces (e.g., A1 and B1). If the management interface has not been configured on a separate subnet, then contact your Avaya representative for guidance in correcting the configuration.

On all screens described in this section, it is to be assumed that parameters are left at their default values unless specified otherwise.

### 7.1. Access the Management Interface

Use a web browser to access the web interface by entering the URL **https://<ip-addr>**, where **<ip-addr>** is the management IP address assigned during installation. The Avaya SBCE login page will appear as shown below. Log in with appropriate credentials.

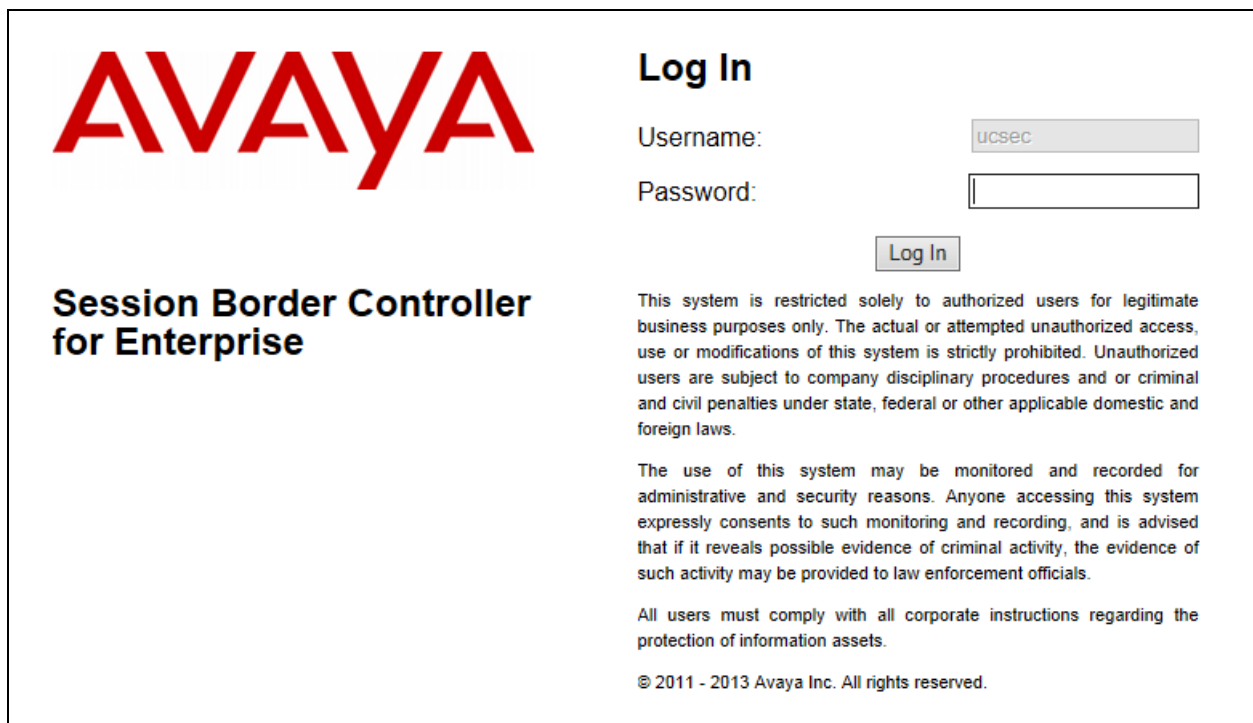

The image shows the login page for the Avaya Session Border Controller for Enterprise. On the left, there is a large red 'AVAYA' logo and the text 'Session Border Controller for Enterprise'. On the right, under the heading 'Log In', there are input fields for 'Username' (containing 'UCSEC') and 'Password'. Below these fields is a 'Log In' button. To the right of the login fields, there is a disclaimer text block stating that the system is restricted to authorized users and that unauthorized access is prohibited. At the bottom, there is a copyright notice: '© 2011 - 2013 Avaya Inc. All rights reserved.'

**AVAYA**

**Session Border Controller  
for Enterprise**

**Log In**

Username:

Password:

This system is restricted solely to authorized users for legitimate business purposes only. The actual or attempted unauthorized access, use or modifications of this system is strictly prohibited. Unauthorized users are subject to company disciplinary procedures and or criminal and civil penalties under state, federal or other applicable domestic and foreign laws.

The use of this system may be monitored and recorded for administrative and security reasons. Anyone accessing this system expressly consents to such monitoring and recording, and is advised that if it reveals possible evidence of criminal activity, the evidence of such activity may be provided to law enforcement officials.


All users must comply with all corporate instructions regarding the protection of information assets.

© 2011 - 2013 Avaya Inc. All rights reserved.

After logging in, the Dashboard screen will appear as shown below. All configuration screens of the Avaya SBCE are accessed by navigating the menu tree in the left pane.

[Alarms](#) [Incidents](#) [Statistics](#) [Logs](#) [Diagnostics](#) [Users](#) [Settings](#) [Help](#) [Log Out](#)

# Session Border Controller for Enterprise



**Dashboard**

- Administration
- Backup/Restore
- System Management
  - Global Parameters
  - Global Profiles
  - SIP Cluster
  - Domain Policies
  - TLS Management
  - Device Specific Settings

**Dashboard**

Information		
System Time	04:19:19 PM GMT	<a href="#">Refresh</a>
Version	6.2.1.Q16	
Build Date	Wed May 28 09:21:02 UTC 2014	

Alarms (past 24 hours)
None found.

Installed Devices
EMS
sp-ucsec1

Incidents (past 24 hours)
sp-ucsec1: Method Prohibited Out-of-Dialog
sp-ucsec1: Method Prohibited Out-of-Dialog
sp-ucsec1: Method Prohibited Out-of-Dialog
sp-ucsec1: Method Prohibited Out-of-Dialog
sp-ucsec1: Method Prohibited Out-of-Dialog

[Add](#)

Notes
No notes found.

## 7.2. Verify Network Configuration and Enable Interfaces

To view the network information provided during installation, navigate to **System Management**. In the right pane, click the **View** link highlighted below.

**Session Border Controller for Enterprise** AVAYA

**System Management**

Dashboard  
Administration  
Backup/Restore  
**System Management**  
‣ Global Parameters  
‣ Global Profiles  
‣ SIP Cluster  
‣ Domain Policies  
‣ TLS Management  
‣ Device Specific Settings

**Devices** Updates SSL VPN Licensing

Device Name (Serial Number)	Management IP	Version	Status						
sp-ucsec1 (IPCS31030012)	10.32.101.10	6.2.1.Q16	Commissioned	Reboot	Shutdown	Restart Application	<b>View</b>	Edit	Delete

A System Information page will appear showing the information provided during installation. The name of the device (**sp-ucsec1**) is shown in the **Appliance Name** field. This name will be referenced in other configuration screens. The two **Network Configuration** entries highlighted below are the only two IP addresses that are directly related to the SIP trunking solution described in these Application Notes. Interfaces **A1** and **B1** represent the private and public interfaces of the Avaya SBCE respectively. Each of these interfaces must be enabled after installation.

**System Information: sp-ucsec1**

**General Configuration**

Appliance Name	sp-ucsec1
Box Type	SIP
Deployment Mode	Proxy

**Device Configuration**

HA Mode	No
Two Bypass Mode	No

**Network Configuration**

IP	Public IP	Netmask	Gateway	Interface
10.32.128.18	10.32.128.18	255.255.255.0	10.32.128.254	A1
192.168.96.228	192.168.96.228	255.255.255.224	192.168.96.254	B1
192.168.96.230	192.168.96.230	255.255.255.224	192.168.96.254	B1
192.168.96.229	192.168.96.229	255.255.255.224	192.168.96.254	B1
10.32.128.19	10.32.128.19	255.255.255.0	10.32.128.254	A1

**DNS Configuration**


Primary DNS	10.32.128.200
Secondary DNS	
DNS Location	DMZ
DNS Client IP	10.32.128.18

**Management IP(s)**

IP	10.32.101.10
----	--------------

To enable the interfaces, first navigate to **Device Specific Settings** → **Network Management** in the left pane and select the device being managed in the center pane. In the right pane, click on the **Interface Configuration** tab. Verify the **Administrative Status** is **Enabled** for both the **A1** and **B1** interfaces. If not, click **Toggle** to enable the interface.

## Session Border Controller for Enterprise



Dashboard

Administration

Backup/Restore

System Management

▸ Global Parameters

▸ Global Profiles

▸ SIP Cluster

▸ Domain Policies

▸ TLS Management

▸ Device Specific Settings

**Network Management**

Media Interface

Network Management: sp-ucsec1

Devices

sp-ucsec1

Network Configuration

Interface Configuration

Name	Administrative Status	
A1	Enabled	<a href="#">Toggle</a>
A2	Disabled	<a href="#">Toggle</a>
B1	Enabled	<a href="#">Toggle</a>
B2	Disabled	<a href="#">Toggle</a>

### 7.3. Signaling Interface

A signaling interface defines an IP address, protocols and listen ports that the Avaya SBCE can use for signaling. Create a signaling interface for both the internal and external sides of the Avaya SBCE.

To create a new interface, navigate to **Device Specific Settings → Signaling Interface** in the left pane. In the center pane, select the Avaya SBCE device (**sp-ucsec1**) to be managed. In the right pane, select **Add**. A pop-up window (not shown) will appear requesting the name of the new interface, followed by series of pop-up windows in which the interface parameters can be configured. Once complete, the settings are shown in the far right pane.

For the compliance test, signaling interface **Int\_Sig\_Intf** was created for the Avaya SBCE internal interface and signaling interface **Ext\_Sig\_Intf** was created for the Avaya SBCE external interface. Each is highlighted below. When configuring the interfaces, configure the parameters as follows:

- Set **Name** to a descriptive name.
- For the internal interface, set the **Signaling IP** to the IP address associated with the private interface (A1) defined in **Section 7.2**. For the external interface, set the **Signaling IP** to the IP address associated with the public interface (B1) defined in **Section 7.2**.
- In the **UDP Port**, **TCP Port** and **TLS Port** fields, enter the port the Avaya SBCE will listen on for each transport protocol. For the internal interface, the Avaya SBCE was configured to listen for TCP on port 5060. For the external interface, the Avaya SBCE was configured to listen for UDP or TCP on port 5060. Since IntelPeer uses UDP on port 5060, it would have been sufficient to simply configure the Avaya SBCE for UDP.

**Session Border Controller for Enterprise** AVAYA

Dashboard  
Administration  
Backup/Restore  
System Management  
‣ Global Parameters  
‣ Global Profiles  
‣ SIP Cluster  
‣ Domain Policies  
‣ TLS Management  
‣ **Device Specific Settings**  
    Network Management  
    Media Interface  
    **Signaling Interface**

**Signaling Interface: sp-ucsec1**

Devices  
sp-ucsec1

**Signaling Interface** Add

Name	Signaling IP	TCP Port	UDP Port	TLS Port	TLS Profile	Edit	Delete
Int_Sig_Intf	10.32.128.18	5060	---	---	None	Edit	Delete
Ext_Sig_Intf	192.168.96.228	5060	5060	---	None	Edit	Delete
RW_Sig_Outside_229	192.168.96.229	5060	---	5061	AvayaSBCServer	Edit	Delete
RW_Sig_Inside_19	10.32.128.19	5060	---	5061	AvayaSBCServer	Edit	Delete

## 7.4. Media Interface

A media interface defines an IP address and port range for transmitting media. Create a media interface for both the internal and external sides of the Avaya SBCE.

To create a new interface, navigate to **Device Specific Settings** → **Media Interface** in the left pane. In the center pane, select the Avaya SBCE device (**sp-ucsec1**) to be managed. In the right pane, select **Add**. A pop-up window (not shown) will appear requesting the name of the new interface, followed by series of pop-up windows in which the interface parameters can be configured. Once complete, the settings are shown in the far right pane.

For the compliance test, media interface **Int\_Media\_Intf** was created for the Avaya SBCE internal interface and media interface **Ext\_Media\_Intf** was created for the Avaya SBCE external interface. Each is highlighted below. When configuring the interfaces, configure the parameters as follows:

- Set **Name** to a descriptive name.
- For the internal interface, set the **Media IP** to the IP address associated with the private interface (A1) defined in **Section 7.2**. For the external interface, set the **Media IP** to the IP address associated with the public interface (B1) defined in **Section 7.2**.
- Set **Port Range** to a range of ports acceptable to both the Avaya SBCE and the far-end. For the compliance test, the default port range was used for both interfaces.

**Session Border Controller for Enterprise** AVAYA

Dashboard  
Administration  
Backup/Restore  
System Management  
‣ Global Parameters  
‣ Global Profiles  
‣ SIP Cluster  
‣ Domain Policies  
‣ TLS Management  
‣ **Device Specific Settings**  
    Network  
    Management  
    **Media Interface**  
    Signaling Interface  
    Signaling Forking

**Media Interface: sp-ucsec1**

Devices  
sp-ucsec1

**Media Interface**

Modifying or deleting an existing media interface will require an application restart before taking effect. Application restarts can be issued from [System Management](#). Add

Name	Media IP	Port Range	Edit	Delete
Int_Media_Intf	10.32.128.18	35000 - 40000	Edit	Delete
Ext_Media_Intf	192.168.96.228	35000 - 40000	Edit	Delete
RW_Med_Outside_229	192.168.96.229	35000 - 40000	Edit	Delete
RW_Med_Inside_19	10.32.128.19	35000 - 40000	Edit	Delete



## 7.5. Server Interworking

A server interworking profile defines a set of parameters that aid in interworking between the Avaya SBCE and a connected server. Create a server interworking profile for Session Manager and the service provider SIP server. These profiles will be applied to the appropriate server in **Sections 7.7.1** and **7.7.2**.

To create a new profile, navigate to **Global Profiles → Server Interworking** in the left pane. In the center pane, select **Add**. A pop-up window (not shown) will appear requesting the name of the new profile, followed by series of pop-up windows in which the profile parameters can be configured. Once complete, the settings are shown in the far right pane. Alternatively, a new profile may be created by selecting an existing profile in the center pane and clicking the **Clone** button in the right pane. This will create a copy of the selected profile which can then be edited as needed. To view the settings of an existing profile, select the profile from the center pane. The settings will appear in the right pane.

The screenshot displays the Avaya Session Border Controller for Enterprise web interface. The left navigation pane shows the hierarchy: Dashboard, Administration, Backup/Restore, System Management, Global Parameters, Global Profiles, and Server Interworking (highlighted). The main content area is titled "Interworking Profiles: cs2100" and features an "Add" button and a "Clone" button. A warning message states: "It is not recommended to edit the defaults. Try cloning or adding a new profile instead." Below this, there are tabs for "General", "Timers", "URI Manipulation", "Header Manipulation", and "Advanced". The "General" tab is active, showing a table of interworking parameters.

General	
Hold Support	RFC3264
180 Handling	None
181 Handling	None
182 Handling	None
183 Handling	None
Refer Handling	No

### 7.5.1. Server Interworking – Session Manager

For the compliance test, server interworking profile **Pkwy-SM** was created for Session Manager by cloning the existing predefined profile **avaya-ru**. The values highlighted below are values that differ from the default. **T.38 Support** is set to **Yes** since IntelPeer supports T.38 fax, even though it could not be tested as part of the compliance test. The **General** tab parameters are shown below.

<b>General</b>	Timers	URI Manipulation	Header Manipulation	Advanced
<b>General</b>				
Hold Support	NONE			
180 Handling	None			
181 Handling	None			
182 Handling	None			
183 Handling	None			
Refer Handling	No			
URI Group	None			
3xx Handling	No			
Diversion Header Support	No			
Delayed SDP Handling	No			
Re-Invite Handling	No			
T.38 Support	Yes			
URI Scheme	SIP			
Via Header Format	RFC3261			

The **Timers**, **URI Manipulation**, **Header Manipulation** tabs have no entries.

The **Advanced** tab parameters are shown below.

General	Timers	URI Manipulation	Header Manipulation	Advanced
Record Routes		Both		
Topology Hiding: Change Call-ID		No		
Call-Info NAT		No		
Change Max Forwards		Yes		
Include End Point IP for Context Lookup		No		
OCS Extensions		No		
AVAYA Extensions		Yes		
NORTEL Extensions		No		
Diversion Manipulation		No		
Metaswitch Extensions		No		
Reset on Talk Spurt		No		
Reset SRTP Context on Session Refresh		No		
Has Remote SBC		Yes		
Route Response on Via Port		No		
Cisco Extensions		No		

[Edit](#)

### 7.5.2. Server Interworking – IntelPeer

For the compliance test, server interworking profile **SP-General-T38** was created for the IntelPeer SIP server. When creating the profile, the default values were used for all parameters except the setting of **T.38 Support** which was set to **Yes**. **T.38 Support** is set to **Yes** since IntelPeer supports T.38 fax, even though it could not be tested as part of the compliance test. The **General** tab parameters are shown below.

The screenshot shows a configuration window with five tabs: General, Timers, URI Manipulation, Header Manipulation, and Advanced. The General tab is active and displays a list of parameters. The 'T.38 Support' parameter is highlighted with a red rectangular box.

General	
Hold Support	NONE
180 Handling	None
181 Handling	None
182 Handling	None
183 Handling	None
Refer Handling	No
URI Group	None
3xx Handling	No
Diversion Header Support	No
Delayed SDP Handling	No
Re-Invite Handling	No
<b>T.38 Support</b>	<b>Yes</b>
URI Scheme	SIP
Via Header Format	RFC3261

The **Timers**, **URI Manipulation**, **Header Manipulation** tabs have no entries.

The **Advanced** tab parameters are shown below.

General	Timers	URI Manipulation	Header Manipulation	Advanced
Record Routes		Both		
Topology Hiding: Change Call-ID		Yes		
Call-Info NAT		No		
Change Max Forwards		Yes		
Include End Point IP for Context Lookup		No		
OCS Extensions		No		
AVAYA Extensions		No		
NORTEL Extensions		No		
Diversion Manipulation		No		
Metaswitch Extensions		No		
Reset on Talk Spurt		No		
Reset SRTP Context on Session Refresh		No		
Has Remote SBC		Yes		
Route Response on Via Port		No		
Cisco Extensions		No		
				<a href="#">Edit</a>


## 7.6. Signaling Manipulation

Signaling manipulation scripts provide for the manipulation of SIP messages which cannot be done by other configuration within the Avaya SBCE. It was not necessary to create any signaling manipulation scripts for interoperability with IntelPeer.

## 7.7. Server Configuration

A server configuration profile defines the attributes of the physical server. Create a server configuration profile for Session Manager and the service provider SIP server.

To create a new profile, navigate to **Global Profiles → Server Configuration** in the left pane. In the center pane, select **Add**. A pop-up window (not shown) will appear requesting the name of the new profile, followed by series of pop-up windows in which the profile parameters can be configured. Once complete, the settings are shown in the far right pane. To view the settings of an existing profile, select the profile from the center pane. The settings will appear in the right pane.

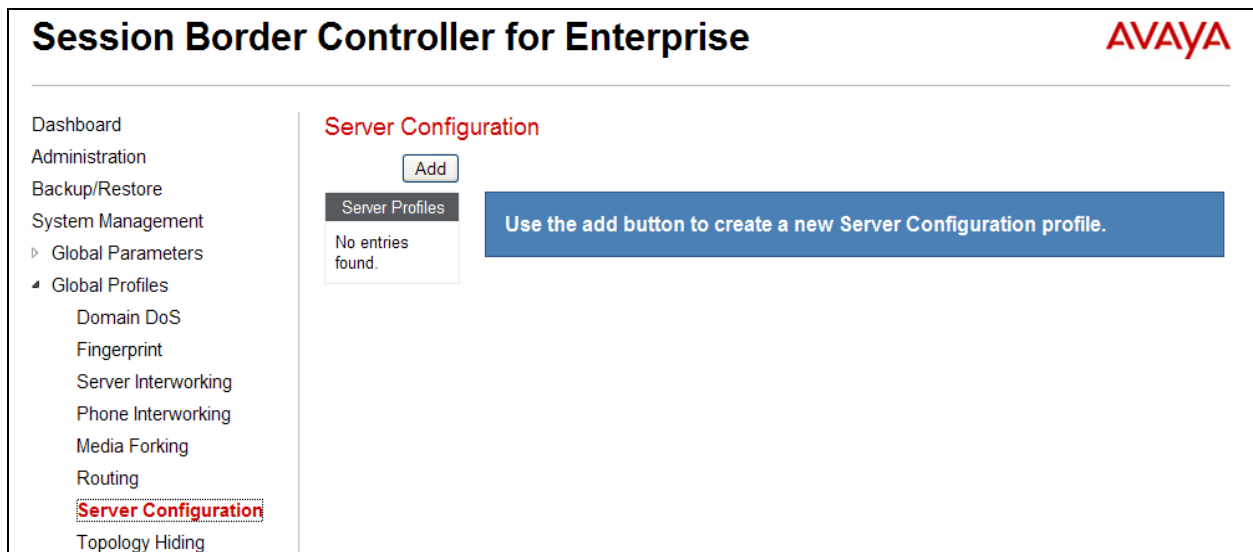

### 7.7.1. Server Configuration – Session Manager

For the compliance test, server configuration profile **Pkwy-SM** was created for Session Manager. When creating the profile, configure the **General** tab parameters as follows:

- Set **Server Type** to **Call Server**.
- Set **IP Addresses / FQDNs** to the IP address of the Session Manager signaling interface.
- SIP trunking uses TCP for transport between Session Manager and the Avaya SBCE. Thus, add **TCP**, if not already present, to the **Supported Transports** list.
- Set the **TCP Port** to the port Session Manager will listen on for SIP requests from the Avaya SBCE. The standard SIP port for TCP is 5060.

The screenshot shows the 'General' tab of a configuration window. At the top right are buttons for 'Rename', 'Clone', and 'Delete'. Below the tabs are 'Authentication', 'Heartbeat', and 'Advanced'. The 'General' tab is active and contains a table with the following data:

Server Type	Call Server
IP Addresses / FQDNs	10.32.128.32
Supported Transports	TCP, TLS
TCP Port	5060
TLS Port	5061

An 'Edit' button is located at the bottom center of the configuration area.

On the **Advanced** tab, check **Enable Grooming** and set the **Interworking Profile** field to the interworking profile for Session Manager defined in **Section 7.5.1**.

The screenshot shows the 'Advanced' tab of the same configuration window. At the top right are buttons for 'Rename', 'Clone', and 'Delete'. Below the tabs are 'General', 'Authentication', 'Heartbeat', and 'Advanced'. The 'Advanced' tab is active and contains the following settings:

Enable DoS Protection	<input type="checkbox"/>
Enable Grooming	<input checked="" type="checkbox"/>
Interworking Profile	PkwySM
TLS Client Profile	AvayaSBCCClient
Signaling Manipulation Script	None
TCP Connection Type	SUBID
TLS Connection Type	SUBID

An 'Edit' button is located at the bottom center of the configuration area.

### 7.7.2. Server Configuration – IntelPeer

For the compliance test, server configuration profile **SP-Intelpeer** was created for IntelPeer. When creating the profile, configure the **General** tab parameters as follows:

- Set **Server Type** to **Trunk Server**.
- Set **IP Addresses / FQDNs** to the IP address of the IntelPeer SIP server.
- Set **Supported Transports** to the transport protocol used for SIP signaling between IntelPeer and the Avaya SBCE. In this case, set to **UDP**.
- Set the **UDP Port** to the standard SIP port of 5060. This is the port IntelPeer will listen on for SIP requests from the Avaya SBCE.

The screenshot shows the 'General' tab of a configuration interface. It contains a table with the following settings:

Server Type	Trunk Server
IP Addresses / FQDNs	192.168.123.103
Supported Transports	UDP
UDP Port	5060

Below the table is an 'Edit' button.

On the **Advanced** tab, set the **Interworking Profile** field to the interworking profile for IntelPeer defined in **Section 7.5.2**.

The screenshot shows the 'Advanced' tab of the configuration interface. It includes 'Rename', 'Clone', and 'Delete' buttons at the top right. The configuration table is as follows:

Enable DoS Protection	<input type="checkbox"/>
Enable Grooming	<input type="checkbox"/>
Interworking Profile	SP-General-T38
Signaling Manipulation Script	None
UDP Connection Type	SUBID

An 'Edit' button is located at the bottom of the configuration area.



## 7.8. Application Rules

An application rule defines the allowable SIP applications and associated parameters. An application rule is one component of the larger endpoint policy group defined in **Section 7.11**. For the compliance test, the predefined **default-trunk** application rule (shown below) was used for both Session Manager and the IntelPeer SIP server.

To view an existing rule, navigate to **Domain Policies** → **Application Rules** in the left pane. In the center pane, select the rule (e.g., **default-trunk**) to be viewed.

The screenshot displays the Avaya Session Border Controller for Enterprise web interface. The left navigation pane shows the hierarchy: Dashboard, Administration, Backup/Restore, System Management, Global Parameters, Global Profiles, SIP Cluster, and Domain Policies. Under Domain Policies, 'Application Rules' is selected and highlighted in red. The main content area is titled 'Application Rules: default-trunk' and includes an 'Add' button, a 'Filter By Device...' dropdown, and a 'Clone' button. A warning message states: 'It is not recommended to edit the defaults. Try cloning or adding a new rule instead.' Below this, the 'Application Rule' configuration is shown in a table format.

Application Type	In	Out	Maximum Concurrent Sessions	Maximum Sessions Per Endpoint
Voice	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2000	2000
Video	<input type="checkbox"/>	<input type="checkbox"/>		
IM	<input type="checkbox"/>	<input type="checkbox"/>		

Miscellaneous	
CDR Support	None
RTCP Keep-Alive	No

An 'Edit' button is located at the bottom right of the configuration area.

## 7.9. Media Rules

A media rule defines the processing to be applied to the selected media. A media rule is one component of the larger endpoint policy group defined in **Section 7.11**. For the compliance test, the predefined **default-low-med** media rule (shown below) was used for both Session Manager and the IntelPeer SIP server.

To view an existing rule, navigate to **Domain Policies → Media Rules** in the left pane. In the center pane, select the rule (e.g., **default-low-med**) to be viewed.

Each of the tabs of the **default-low-med** media rule containing data is shown below.

The **Media NAT** tab has no entries.

The screenshot shows the 'Session Border Controller for Enterprise' interface. On the left is a navigation menu with options like Dashboard, Administration, Backup/Restore, System Management, Global Parameters, Global Profiles, SIP Cluster, and Domain Policies. The 'Media Rules' section under Domain Policies is selected. The main area is titled 'Media Rules: default-low-med' and includes an 'Add' button, a 'Filter By Device...' dropdown, and a 'Clone' button. A warning message states: 'It is not recommended to edit the defaults. Try cloning or adding a new rule instead.' Below this are tabs for 'Media NAT', 'Media Encryption', 'Media Anomaly', 'Media Silencing', and 'Media QoS'. The 'Media NAT' tab is active, showing a 'Media NAT' label and a 'Learn Media IP dynamically' checkbox with an 'Edit' button.

The **Media Encryption** tab indicates that no encryption was used.

The screenshot shows the 'Media Encryption' tab selected. It contains three sections: 'Audio Encryption', 'Video Encryption', and 'Miscellaneous'. Under 'Audio Encryption', 'Preferred Formats' is set to 'RTP' and 'Interworking' is checked. Under 'Video Encryption', 'Preferred Formats' is set to 'RTP' and 'Interworking' is checked. Under 'Miscellaneous', 'Capability Negotiation' is unchecked. An 'Edit' button is at the bottom.

The **Media Anomaly** tab shows **Media Anomaly Detection** was disabled.

Media NAT	Media Encryption	Media Anomaly	Media Silencing	Media QoS
<div>Media Anomaly Detection <input type="checkbox"/></div> <div>Edit</div>				

The **Media Silencing** tab has no entries.

The **Media QoS** settings are shown below.

Media NAT	Media Encryption	Media Anomaly	Media Silencing	Media QoS
<div>Media QoS Reporting</div> <div>RTCP Enabled <input type="checkbox"/></div> <div>Media QoS Marking</div> <div>Enabled <input type="checkbox"/></div> <div>Edit</div>				

## 7.10. Signaling Rules

A signaling rule defines the processing to be applied to the selected signaling traffic. A signaling rule is one component of the larger endpoint policy group defined in **Section 7.11**. A specific signaling rule was created for both the Session Manager and IntelPeer.

To create a new rule, navigate to **Domain Policies → Signaling Rules** in the left pane. In the center pane, select **Add**. A pop-up window (not shown) will appear requesting the name of the new rule, followed by series of pop-up windows in which the rule parameters can be configured. Once complete, the settings are shown in the far right pane. To view the settings of an existing rule, select the rule from the center pane. The settings will appear in the right pane.

The screenshot displays the 'Session Border Controller for Enterprise' web interface. The left sidebar contains a navigation menu with categories like Dashboard, Administration, Backup/Restore, System Management, and Domain Policies. Under 'Domain Policies', 'Signaling Rules' is highlighted. The main content area is titled 'Signaling Rules: default' and includes an 'Add' button, a 'Filter By Device...' dropdown, and a 'Clone' button. A warning message states: 'It is not recommended to edit the defaults. Try cloning or adding a new rule instead.' Below this, there are tabs for 'General', 'Requests', 'Responses', 'Request Headers', 'Response Headers', and 'Signaling QoS'. The 'General' tab is active, showing settings for 'Inbound' and 'Outbound' traffic. For both directions, 'Requests', 'Non-2XX Final Responses', 'Optional Request Headers', and 'Optional Response Headers' are all set to 'Allow'. At the bottom, the 'Content-Type Policy' section has 'Enable Content-Type Checks' checked, and the 'Action' is set to 'Allow' for both 'Multipart Action' and 'Allow'.

Inbound			
Requests	Allow		
Non-2XX Final Responses	Allow		
Optional Request Headers	Allow		
Optional Response Headers	Allow		

Outbound			
Requests	Allow		
Non-2XX Final Responses	Allow		
Optional Request Headers	Allow		
Optional Response Headers	Allow		

Content-Type Policy			
Enable Content-Type Checks	<input checked="" type="checkbox"/>		
Action	Allow	Multipart Action	Allow

### 7.10.1. Signaling Rules – Session Manager

For the compliance test, signaling rule **SessMgr\_SigRules** was created for Session Manager to prevent proprietary headers in the SIP messages, sent from the Session Manager, from being propagated to IntelPeer. These headers may contain internal addresses or other information about the internal network.

**SessMgr\_SigRules** was created using the default values on all tabs except the **Request Headers** and **Response Headers** tabs. The **Request Headers** tab shows the manipulations performed on request messages such as the initial INVITE or UPDATE message. An entry is created by clicking the **Add In Header Control** or **Add Out Header Control** button depending on the direction (relative to the Avaya SBCE) of the message to be modified. Entries were created to perform the following actions:

1. Removes the **AV-Correlation-ID** header from **INVITE** messages in the **IN** direction (Session Manager to Avaya SBCE).
2. Removes the **Endpoint-View** header from **ALL** messages in the **IN** direction.

General	Requests	Responses	Request Headers	Response Headers	Signaling QoS	UCID		
Add In Header Control				Add Out Header Control				
Row	Header Name	Method Name	Header Criteria	Action	Proprietary	Direction		
1	AV-Correlation-ID	INVITE	Forbidden	Remove Header	Yes	IN	<a href="#">Edit</a>	<a href="#">Delete</a>
2	Endpoint-View	ALL	Forbidden	Remove Header	Yes	IN	<a href="#">Edit</a>	<a href="#">Delete</a>

Similarly, manipulations can be performed on SIP response messages. These can be viewed by selecting the **Response Header** tab as shown below. Entries were created in the same manner as was done on the **Request Headers** tab. The entries shown perform the following actions:

1. Removes the **Endpoint-View** header from any **2XX** response to **ALL** messages in the **IN** direction (Session Manager to Avaya SBCE).
2. Removes the **Endpoint-View** header from any **1XX** response to an **INVITE** message in the **IN** direction.

General Requests Responses Request Headers <b>Response Headers</b> Signaling QoS UCID									
Add In Header Control					Add Out Header Control				
Row	Header Name	Response Code	Method Name	Header Criteria	Action	Proprietary	Direction		
1	Endpoint-View	2XX	ALL	Forbidden	Remove Header	Yes	IN	Edit	Delete
2	Endpoint-View	1XX	INVITE	Forbidden	Remove Header	Yes	IN	Edit	Delete

### 7.10.2. Signaling Rules – IntelPeer

The signaling rule **Intelpeer-SR** was created by cloning the predefined **default** signaling rule. This signaling rule was used for the IntelPeer SIP server.

Optionally, the **Requests** tab may be modified as shown below to return a 200 OK response to all OPTIONS messages from IntelPeer. Without this setting, the OPTIONS message is forwarded to the Session Manager which returns a “404 Not Found” response. Specifically, IntelPeer sends a text string “DAL43VXBR0002W30020” in the user part of the Request-URI which the Session Manager does not know how to route resulting in the 404 response.

This setting is optional because the 404 responses are accepted by IntelPeer as a link up indication and do not impact the trunk in anyway. However, an observer may interpret the 404 responses as indicating the trunk has a problem.

General	<b>Requests</b>	Responses	Request Headers	Response Headers	Signaling QoS	UCID
			Add In Request Control	Add Out Request Control		
Row	Method Name	In Dialog Action	Out of Dialog Action	Proprietary	Direction	
1	OPTIONS	Block with "200 OK"	Block with "200 OK"	No	In	<a href="#">Edit</a> <a href="#">Delete</a>

## 7.11. Endpoint Policy Groups

An endpoint policy group is a set of policies that will be applied to traffic between the Avaya SBCE and an endpoint (e.g., a connected server). Thus, an endpoint policy group must be created for Session Manager and the service provider SIP server. The endpoint policy group is applied to the traffic as part of the endpoint flow defined in **Section 7.14**.

To create a new group, navigate to **Domain Policies → End Point Policy Groups** in the left pane. In the center pane, select **Add**. A pop-up window (not shown) will appear requesting the name of the new group, followed by series of pop-up windows in which the group parameters can be configured. Once complete, the settings are shown in the far right pane. To view the settings of an existing group, select the group from the center pane. The settings will appear in the right pane.

The screenshot shows the 'Session Border Controller for Enterprise' web interface. The left navigation pane includes 'Domain Policies' with 'End Point Policy Groups' selected. The main area is titled 'Policy Groups: default-low' and contains a list of policy groups on the left and a table of settings on the right. The table has columns for Order, Application, Border, Media, Security, Signaling, and Time of Day. The first row shows a policy group with Order 1, Application 'default', Border 'default', Media 'default-low-med', Security 'default-low', Signaling 'default', and Time of Day 'default'.

Order	Application	Border	Media	Security	Signaling	Time of Day
1	default	default	default-low-med	default-low	default	default

### 7.11.1. Endpoint Policy Group – Session Manager

For the compliance test, endpoint policy group **SM** was created for Session Manager. Default values were used for each of the rules which comprise the group with the exception of **Application** and **Signaling**. For **Application**, enter the application rule created in **Section 7.8**. For **Signaling**, enter the signaling rule created in **Section 7.10.1**. The details of the default settings for **Media** are showed in **Section 7.9**.

The screenshot shows a 'Policy Group' configuration table. The table has columns for Order, Application, Border, Media, Security, Signaling, and Time of Day. The first row shows a policy group with Order 1, Application 'default-trunk', Border 'default', Media 'default-low-med', Security 'default-low', Signaling 'SessMgr\_SigRules', and Time of Day 'default'.

Order	Application	Border	Media	Security	Signaling	Time of Day
1	default-trunk	default	default-low-med	default-low	SessMgr_SigRules	default



### 7.11.2. Endpoint Policy Group – IntelPeer

For the compliance test, endpoint policy group **Intelpeer-EP** was created for the IntelPeer SIP server. Default values were used for each of the rules which comprise the group with the exception of **Application** and **Signaling**. For **Application**, enter the application rule created in **Section 7.8**. For **Signaling**, enter the signaling rule created in **Section 7.10.2**. The details of the default settings for **Media** are showed in **Section 7.9**.

Policy Group							
							Summary Add
Order	Application	Border	Media	Security	Signaling	Time of Day	
1	default-trunk	default	default-low-med	default-low	Intelpeer-SR	default	Edit Clone

### 7.12. Routing

A routing profile defines where traffic will be directed based on the contents of the Request-URI. A routing profile is applied only after the traffic has matched an endpoint server flow defined in **Section 7.14**. Create a routing profile for Session Manager and the service provider SIP server.

To create a new profile, navigate to **Global Profiles → Routing** in the left pane. In the center pane, select **Add**. A pop-up window (not shown) will appear requesting the name of the new profile, followed by series of pop-up windows in which the profile parameters can be configured. Once complete, the settings are shown in the far right pane. To view the settings of an existing profile, select the profile from the center pane. The settings will appear in the right pane.

## Session Border Controller for Enterprise

AVAYA

Dashboard

Administration

Backup/Restore

System Management

Global Parameters

Global Profiles

- Domain DoS
- Fingerprint
- Server Interworking
- Phone Interworking
- Media Forking
- Routing**
- Server Configuration

Routing Profiles: default

AddClone

Routing Profiles

- default

Routing Profile

Add

Priority	URI Group	Next Hop Server 1	Next Hop Server 2	
1	*	---	---	View Edit

### 7.12.1. Routing – Session Manager

For the compliance test, routing profile **To\_PkwySM** was created for Session Manager. When creating the profile, configure the parameters as follows:

- Set the **URI Group** to the wild card \* to match on any URI.
- Set the **Next Hop Server 1** field to the IP address of Session Manager signaling interface.
- Enable **Next Hop Priority**.
- Set the **Outgoing Transport** field to **TCP**.

View Routing Rule		X
Priority	1	
URI Group	*	
Next Hop Server 1	10.32.128.32	
Next Hop Server 2	---	
Next Hop Priority	<input checked="" type="checkbox"/>	
NAPTR	<input type="checkbox"/>	
SRV	<input type="checkbox"/>	
Next Hop in Dialog	<input type="checkbox"/>	
Ignore Route Header	<input type="checkbox"/>	
Outgoing Transport	TCP	

### 7.12.2. Routing – IntelPeer

For the compliance test, routing profile **To\_Trunks** was created for IntelPeer. When creating the profile, configure the parameters as follows:

- Set the **URI Group** to the wild card \* to match on any URI.
- Set the **Next Hop Server 1** field to the IP address of the IntelPeer SIP server.
- Enable **Next Hop Priority**.
- Set the **Outgoing Transport** field to **UDP**.

View Routing Rule		X
Priority	1	
URI Group	*	
Next Hop Server 1	192.168.123.103	
Next Hop Server 2	---	
Next Hop Priority	<input checked="" type="checkbox"/>	
NAPTR	<input type="checkbox"/>	
SRV	<input type="checkbox"/>	
Next Hop in Dialog	<input type="checkbox"/>	
Ignore Route Header	<input type="checkbox"/>	
Outgoing Transport	UDP	

## 7.13. Topology Hiding

Topology hiding allows the host part of some SIP message headers to be modified in order to prevent private network information from being propagated to the untrusted public network. It can also be used as an interoperability tool to adapt the host portion of these same headers to meet the requirements of the connected servers. The topology hiding profile is applied as part of the endpoint flow in **Section 7.14**.

To create a new profile, navigate to **Global Profiles → Topology Hiding** in the left pane. In the center pane, select **Add**. A pop-up window (not shown) will appear requesting the name of the new profile, followed by a pop-up window in which a header can be selected and configured. Additional headers can be added in this window. Once complete, the settings are shown in the far right pane. To view the settings of an existing profile (e.g., **default**), select the profile from the center pane. The settings will appear in the right pane.

### Session Border Controller for Enterprise

Dashboard

Administration

Backup/Restore

System Management

▸ Global Parameters

▾ Global Profiles

Domain DoS

Fingerprint

Server Interworking

Phone Interworking

Media Forking

Routing

Server Configuration

**Topology Hiding**

Signaling Manipulation

URI Groups

▸ SIP Cluster

▸ Domain Policies

Topology Hiding Profiles

Add

Clone

default

cisco\_th\_profile

It is not recommended to edit the defaults. Try cloning or adding a new profile instead.

Topology Hiding

Header	Criteria	Replace Action	Overwrite Value
Via	IP/Domain	Auto	---
Refer-To	IP/Domain	Auto	---
Record-Route	IP/Domain	Auto	---
To	IP/Domain	Auto	---
SDP	IP/Domain	Auto	---
From	IP/Domain	Auto	---
Request-Line	IP/Domain	Auto	---
Referred-By	IP/Domain	Auto	---

Edit

CTM; Reviewed:  
SPOC 11/13/2014

Solution & Interoperability Test Lab Application Notes  
©2014 Avaya Inc. All Rights Reserved.

68 of 76  
IntPrC63S63SBCE

### 7.13.1. Topology Hiding – Session Manager

For the compliance test, topology hiding profile **PRT-Domain** was created for Session Manager. This profile will be applied to traffic from the Avaya SBCE to Session Manager. When creating the profile, configure the parameters as follows:

- Set **Header** to the header whose host part of the URI is to be modified.
- Set **Criteria** to **IP/Domain** to indicate that the host part should be modified if it is an IP address or a domain.
- Set **Replace Action** to **Auto** for all headers except **Request-Line**, **From**, **To**, **Refer-To** and **Referred-By** which should be set to **Overwrite**.
- For those headers to be overwritten, the **Overwrite Value** is set to the enterprise domain (**avaya.com**).

Topology Hiding			
Header	Criteria	Replace Action	Overwrite Value
Via	IP/Domain	Auto	---
Refer-To	IP/Domain	Overwrite	avaya.com
Record-Route	IP/Domain	Auto	---
To	IP/Domain	Overwrite	avaya.com
SDP	IP/Domain	Auto	---
From	IP/Domain	Overwrite	avaya.com
Request-Line	IP/Domain	Overwrite	avaya.com
Referred-By	IP/Domain	Overwrite	avaya.com
<div>Edit</div>			

### 7.13.2. Topology Hiding – IntelPeer

For the compliance test, topology hiding profile **SP-General** was created for IntelPeer. It is cloned from the predefined **default** profile. This profile will be applied to traffic from the Avaya SBCE to IntelPeer. All settings were unchanged from the **default** profile as shown below:

Topology Hiding			
Header	Criteria	Replace Action	Overwrite Value
Via	IP/Domain	Auto	---
Refer-To	IP/Domain	Auto	---
Record-Route	IP/Domain	Auto	---
To	IP/Domain	Auto	---
SDP	IP/Domain	Auto	---
From	IP/Domain	Auto	---
Request-Line	IP/Domain	Auto	---
Referred-By	IP/Domain	Auto	---
<input type="button" value="Edit"/>			

## 7.14. End Point Flows

Endpoint flows are used to determine the endpoints involved in a call in order to apply the appropriate policies. When a packet arrives at the Avaya SBCE, the content of the packet (IP addresses, URIs, etc) is used to determine which flow it matches. Once the flow is determined, the flow points to policies and profiles which control processing, privileges, authentication, routing, etc. Once routing is applied and the destination endpoint is determined, the policies for the destination endpoint are applied. Thus, two flows are involved in every call: the source endpoint flow and the destination endpoint flow. In the case of the compliance test, the endpoints are Session Manager and the service provider SIP server.

To create a new flow for a server endpoint, navigate to **Device Specific Settings → End Point Flows** in the left pane. In the center pane, select the Avaya SBCE device (**sp-ucsec1**) to be managed. In the right pane, select the **Server Flows** tab and click the **Add** button. A pop-up window (not shown) will appear requesting the name of the new flow and the flow parameters. Once complete, the settings are shown in the far right pane.

The screenshot displays the Avaya Session Border Controller for Enterprise web interface. The left navigation pane shows the hierarchy: Dashboard, Administration, Backup/Restore, System Management, and Device Specific Settings, with 'End Point Flows' selected. The main content area is titled 'End Point Flows: sp-ucsec1'. It features a 'Devices' tab with 'sp-ucsec1' selected, and a 'Server Flows' tab. Below the tabs is a table with columns: Priority, Flow Name, URI Group, Received Interface, Signaling Interface, End Point Policy Group, and Routing Profile. Two flows are listed: 'Avaya-SM' with priority 1 and 'RW-Avaya-SM' with priority 2. Each flow has 'View' and 'Clone' links. An 'Add' button is visible in the top right of the flows section.

Priority	Flow Name	URI Group	Received Interface	Signaling Interface	End Point Policy Group	Routing Profile		
1	Avaya-SM	*	Ext_Sig_Intf	Int_Sig_Intf	SM	To_Trunks	View	Clor
2	RW-Avaya-SM	*	RW_Sig_Outside_229	RW_Sig_Inside_19	Remote_User_SM	default	View	Clor

### 7.14.1. End Point Flow – Session Manager

For the compliance test, endpoint flow **Pkwy-SM** was created for Session Manager. All traffic from Session Manager will match this flow as the source flow and use the specified **Routing Profile To\_Trunks** to determine the destination server and corresponding destination flow. The **End Point Policy** and **Topology Hiding Profile** will be applied as appropriate. When creating the flow, configure the parameters as follows:

- For the **Flow Name**, enter a descriptive name.
- For **Server Configuration**, select the Session Manager server created in **Section 7.7.1**.
- To match all traffic, set the **URI Group**, **Transport**, and **Remote Subnet** to \*.
- Set the **Received Interface** to the external signaling interface.
- Set the **Signaling Interface** to the internal signaling interface.
- Set the **Media Interface** to the internal media interface.
- Set the **End Point Policy Group** to the endpoint policy group defined for Session Manager in **Section 7.11.1**.
- Set the **Routing Profile** to the routing profile defined in **Section 7.12.2** used to direct traffic to the IntelPeer SIP server.
- Set the **Topology Hiding Profile** to the topology hiding profile defined for Session Manager in **Section 7.13.1**.

View Flow: Pkwy-SM				X
Criteria		Profile		
Flow Name	Pkwy-SM	Signaling Interface	Int_Sig_Intf	
Server Configuration	Pkwy-SM	Media Interface	Int_Media_Intf	
URI Group	*	End Point Policy Group	SM	
Transport	*	Routing Profile	To_Trunks	
Remote Subnet	*	Topology Hiding Profile	PRT-Domain	
Received Interface	Ext_Sig_Intf	File Transfer Profile	None	



### 7.14.2. End Point Flow – IntelPeer

For the compliance test, endpoint flow **IntelPeer** was created for the IntelPeer SIP server. All traffic from IntelPeer will match this flow as the source flow and use the specified **Routing Profile To\_PkwySM** to determine the destination server and corresponding destination flow. The **End Point Policy** and **Topology Hiding Profile** will be applied as appropriate. When creating the flow, configure the parameters as follows:

- For the **Flow Name**, enter a descriptive name.
- For **Server Configuration**, select the IntelPeer SIP server created in **Section 7.7.2**.
- To match all traffic, set the **URI Group**, **Transport**, and **Remote Subnet** to \*.
- Set the **Received Interface** to the internal signaling interface.
- Set the **Signaling Interface** to the external signaling interface.
- Set the **Media Interface** to the external media interface.
- Set the **End Point Policy Group** to the endpoint policy group defined for IntelPeer in **Section 7.11.2**.
- Set the **Routing Profile** to the routing profile defined in **Section 7.12.1** used to direct traffic to Session Manager.
- Set the **Topology Hiding Profile** to the topology hiding profile defined for IntelPeer in **Section 7.13.2**.

View Flow: Intelpeer				X
Criteria		Profile		
Flow Name	Intelpeer	Signaling Interface	Ext_Sig_Intf	
Server Configuration	SP-Intelpeer	Media Interface	Ext_Media_Intf	
URI Group	*	End Point Policy Group	Intelpeer-EP	
Transport	*	Routing Profile	To_PkwySM	
Remote Subnet	*	Topology Hiding Profile	SP-General	
Received Interface	Int_Sig_Intf	File Transfer Profile	None	

## 8. IntelPeer CoreCloud SIP Trunking Service Configuration

IntelPeer is responsible for the network configuration and deployment of the IntelPeer CoreCloud SIP Trunking Service.

IntelPeer will require that the customer provide the IP address and port number used to reach the Avaya SBCE at the edge of the enterprise. IntelPeer will provide the IP address and port number of the IntelPeer SIP proxy/SBC, IP addresses/ports of media sources and Direct Inward Dialed (DID) numbers assigned to the enterprise. This information is used to complete the Communication Manager, Session Manager and the Avaya SBCE configuration discussed in the previous sections.

The configuration between IntelPeer and the enterprise is a static configuration. There is no registration of the SIP trunk or enterprise users to the IntelPeer network.

## 9. Verification Steps

This section provides verification steps that may be performed in the field to verify that the solution is configured properly. This section also provides a list of useful troubleshooting commands that can be used to troubleshoot the solution.

Verification Steps:

1. Verify that endpoints at the enterprise site can place calls to the PSTN and that the call remains active for more than 35 seconds. This time period is included to verify that proper routing of the SIP messaging has satisfied SIP protocol timers.
2. Verify that endpoints at the enterprise site can receive calls from the PSTN and that the call can remain active for more than 35 seconds.
3. Verify that a user on the PSTN can end an active call by hanging up.
4. Verify that an endpoint at the enterprise site can end an active call by hanging up.

Troubleshooting:

1. Communication Manager:
  - **list trace station** <extension number> - Traces calls to and from a specific station.
  - **list trace tac** <trunk access code number> - Trace calls over a specific trunk group.
  - **status station** <extension number> - Displays signaling and media information for an active call on a specific station.
  - **status trunk** <trunk access code number> - Displays real-time trunk group information.
  - **status trunk** <trunk access code number/channel number> - Displays real-time signaling and media information for an active trunk channel.

## 2. Session Manager:

- **Call Routing Test** - The Call Routing Test verifies the routing for a particular source and destination. To run the routing test, navigate to **Elements → Session Manager → System Tools → Call Routing Test**. Enter the requested data to run the test.

## 10. Conclusion

These Application Notes describe the configuration necessary to connect Avaya Aura® Communication Manager, Avaya Aura® Session Manager and the Avaya Session Border Controller for Enterprise to the IntelPeer CoreCloud SIP Trunking Service. The IntelPeer CoreCloud SIP Trunking Service provides businesses a flexible, cost-saving alternative to traditional hardwired telephony trunks. Please refer to **Section 2.2** for any exceptions or workarounds.

## 11. References

This section references the documentation relevant to these Application Notes. Additional Avaya product documentation is available at <http://support.avaya.com>.

- [1] *Installing and Configuring Avaya Aura® System Platform*, Release 6.3.4, July 2014.
- [2] *Administering Avaya Aura® System Platform*, Release 6.3.4, July 2014.
- [3] *Administering Avaya Aura® Communication Manager*, Release 6.3, July 2014, Document Number 03-300509.
- [4] *Avaya Aura® Communication Manager Feature Description and Implementation*, Release 6.3, July 2014, Document Number 555-245-205.
- [5] *Upgrading Avaya Aura® System Manager to 6.3.8 on System Platform*, Release 6.3.8, June 2014.
- [6] *Administering Avaya Aura® System Manager for Release 6.3.8*, Release 6.3.8, August 2014.
- [7] *Installing Service Packs for Avaya Aura® Session Manager*, Release 6.3, July 2014.
- [8] *Administering Avaya Aura® Session Manager*, Release 6.3, August 2014.
- [9] *Avaya 1600 Series IP Deskphones Administrator Guide Release 1.3.5*, May 2014, Document Number 16-601438.
- [10] *Avaya one-X® Deskphone Edition H.323 9608,9611G,9621G and 9641G Administrator Guide*, Release 6.3.1, January 2014, Document Number 16-300698.
- [11] *Avaya one-X® Deskphone Edition SIP 9608/9611G/9621G/9641G Administrator Guide*, Release 6.2, January 2014, Document Number 16-601944.
- [12] *Administering Avaya one-X® Communicator*, July 2014.
- [13] *Implementing and Administering the Avaya A175 Desktop Video Device with the Avaya Flare® Experience*, Release 1.1, May 2012.
- [14] *Administering Avaya Flare® Experience for Windows*, September 2013, Document Number 18-604156.
- [15] RFC 3261 *SIP: Session Initiation Protocol*, <http://www.ietf.org/>
- [16] RFC 2833 *RTP Payload for DTMF Digits, Telephony Tones and Telephony Signals*, <http://www.ietf.org/>

---

**©2014 Avaya Inc. All Rights Reserved.**

Avaya and the Avaya Logo are trademarks of Avaya Inc. All trademarks identified by ® and ™ are registered trademarks or trademarks, respectively, of Avaya Inc. All other trademarks are the property of their respective owners. The information provided in these Application Notes is subject to change without notice. The configurations, technical data, and recommendations provided in these Application Notes are believed to be accurate and dependable, but are presented without express or implied warranty. Users are responsible for their application of any products specified in these Application Notes.

Please e-mail any questions or comments pertaining to these Application Notes along with the full title name and filename, located in the lower right corner, directly to the Avaya DevConnect Program at [devconnect@avaya.com](mailto:devconnect@avaya.com).