



**Application Notes for Jabra LINK 35 EHS Adapter and  
Jabra Motion Office to Interoperate with Avaya 96x0  
Deskphones from the 9600 Series of IP Deskphones  
- Issue 1.0**

**Abstract**

These Application Notes describe the configuration steps required to integrate Jabra LINK 35 EHS (Electronic Hook Switch) Adapter and the Jabra PRO 925 Jabra Motion Office with Avaya 96x0 Deskphones from the 9600 Series of IP Deskphones. Jabra LINK 35 provides Jabra Motion Office the ability to hear ring tones, to answer and to end calls directly from the headset when the user is away from their desk.

Readers should pay attention to section 2, in particular the scope of testing as outlined in Section 2.1 as well as the observations noted in Section 2.2, to ensure that their own use cases are adequately covered by this scope and results.

Information in these Application Notes has been obtained through DevConnect compliance testing and additional technical discussions. Testing was conducted via the DevConnect Program at the Avaya Solution and Interoperability Test Lab.

## 1. Introduction

These Application Notes describe the configuration steps required to integrate Jabra LINK 35 EHS (Electronic Hook Switch) Adapter and Jabra Motion Office with Avaya 96x0 Deskphones from the 9600 Series of IP Deskphones. Jabra LINK 35 provides Jabra Motion Office the ability to hear ring tones, and to answer and end calls directly from the headset when the user is away from their desk.

## 2. General Test Approach and Test Results

The interoperability compliance test included feature and serviceability testing. The feature testing focused on placing calls to and from the Avaya 96x0 IP Deskphones with the Jabra LINK 35 EHS Adapter and Jabra Motion Office and verifying two-way audio. The call types included calls to and from local extensions, the PSTN and to voicemail.

The serviceability testing focused on verifying the usability of Jabra Motion Office after restarting the 96x0 IP Deskphones and power cycling the headset base.

DevConnect Compliance Testing is conducted jointly by Avaya and DevConnect members. The jointly-defined test plan focuses on exercising APIs and/or standards-based interfaces pertinent to the interoperability of the tested products and their functionalities. DevConnect Compliance Testing is not intended to substitute full product performance or feature testing performed by DevConnect members, nor is it to be construed as an endorsement by Avaya of the suitability or completeness of a DevConnect member's solution.

Avaya's formal testing and Declaration of Conformity is provided only on the headsets/handsets that carry the Avaya brand or logo. Avaya may conduct testing of non-Avaya headset/handset to determine interoperability with Avaya phones. However, Avaya does not conduct the testing of non-Avaya headsets/handsets for: Acoustic Pressure, Safety, Hearing Aid Compliance, EMC regulations, or any other tests to ensure conformity with safety, audio quality, long-term reliability or any regulation requirements. As a result, Avaya makes no representations whether a particular non-Avaya headset will work with Avaya's telephones or with a different generation of the same Avaya telephone.

Since there is no industry standard for handset interfaces, different manufacturers utilize different handset/headset interfaces with their telephones. Therefore, any claim made by a headset vendor that its product is compatible with Avaya telephones does not equate to a guarantee that the headset will provide adequate safety protection or audio quality.

## 2.1. Interoperability Compliance Testing

All test cases were performed manually. The following features were verified:

- Placing calls to the voicemail system. Voice messages were recorded and played back to verify that the playback volume and recording level were good.
- Placing calls to/from internal extensions to verify two-way audio.
- Placing calls to/from the PSTN to verify two-way audio.
- Hearing ring back tone for incoming and outgoing calls.
- Answering and ending calls using the call control button on the headset.
- Using the volume control buttons on the Jabra headset to adjust the audio volume.
- Using the mute control button on the Jabra headset to mute and un-mute the audio.

For the serviceability testing the 96x0 IP Deskphone was restarted to verify proper operation of the headset after the reboot was completed. Power cycling of the headset base was also performed to verify proper operation after it powered up.

## 2.2. Test Results


All test cases passed.

## 2.3. Support

For technical support of Jabra Motion Office and Jabra products in general, please refer to [www.jabra.com](http://www.jabra.com). On the Jabra website, support hotline numbers can be found for specific countries.

### 3. Reference Configuration

**Figure 1** illustrates the test configuration used to verify Jabra LINK 35 EHS Adapter and Jabra Motion Office with Avaya 96x0 Series IP Deskphones. The configuration consists of an Avaya S8800 Server running Communication Manager with an Avaya G650 Media Gateway providing connectivity to the PSTN via an ISDN-PRI trunk. Avaya Aura® Messaging was used as the voicemail system.

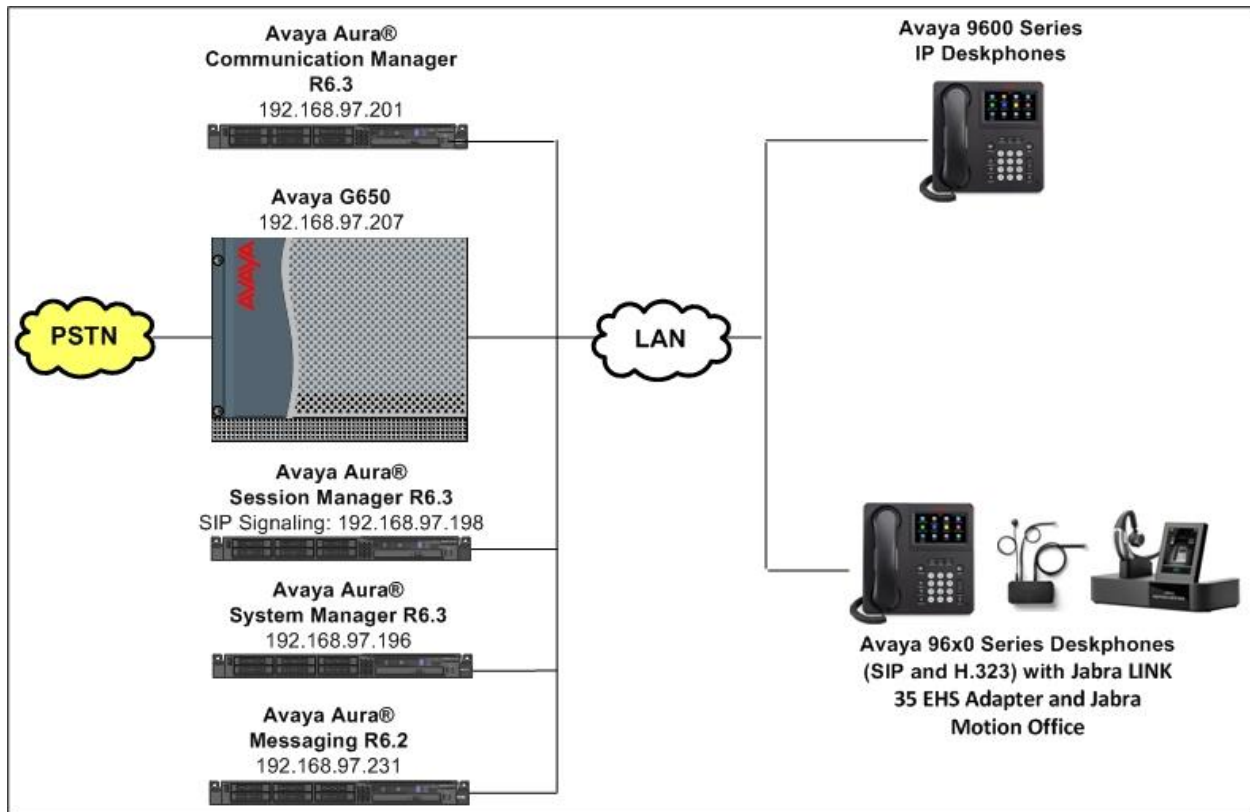

**Figure 1: Avaya 96x0 Series IP Deskphone with Jabra LINK 35 EHS Adapter and the Jabra Motion Office**

### 3.1. Answering, Ending, and Placing Calls

To answer, end, or place a call using Jabra Motion Office follow the instructions below.

- To Answer a Call
- Press the call control button on the headset to answer an incoming call. This would automatically activate the headset button on the IP telephone.  
  
Alternatively, if the headset button on the IP telephone is pressed first, then press the call control button on the headset, if it isn't already activated, to answer an incoming call. Note that pressing the headset button on the IP telephone does not automatically activate the call control button on the headset.
  - If auto-answer is enabled and the headset button on the IP telephone *and* the call control button on the headset are activated, subsequent incoming calls will be answered automatically and a two-way audio path will be established to the headset.

To End a Call

Press the call control button on the headset to terminate a call. This automatically deactivates the headset button on the IP telephone.

Alternatively, if the call is terminated by pressing the headset button on the IP telephone, the headset remains activated and the control button on the headset must also be pressed to deactivate the headset. Note that pressing the headset button on the IP telephone does not automatically deactivate the headset.

To Place a Call

The call button on the headset is not used to initiate a call. Alternatively select the desk phone on the Jabra Motion Office touchscreen and then press the green handset icon to get dial tone and dial the number. This would automatically activate the headset button on the IP telephone.

Alternatively, if the headset button on the IP telephone is pressed first, then select the desk phone on the Jabra Motion Office touchscreen and press the green handset icon to activate the headset. Pressing the headset button on the IP telephone does not automatically activate the headset.

## 4. Equipment and Software Validated

The following equipment and software were used for the sample configuration provided:

Equipment/Software	Release/Version
Avaya Aura® Session Manager running on S8800 Server	Release: 6.3.2.0.632023
Avaya Aura® System Manager running on S8800 Server	6.3.0 - FP2 Build No. - 6.3.0.8.5682-6.3.8.1627
Avaya Aura® Communication Manager running on Avaya S8800Server	R016x.03.0.124.0 patch 21172
Avaya G650 Media Gateway IPSI TN2312BP CLAN TN799DP IP Media Processor TN2302AP Digital Line TN2224	HW06, FW043 HW01, FW026 HW20, FW117 000006
Avaya Aura® Messaging	6.2
Avaya 96x0 Series IP Deskphones (H.323)	3.2.2
Avaya 96x0 Series IP Deskphones (SIP)	2.6.11.4
Jabra LINK 35 EHS Adapter	P/N 14201-35
Jabra Motion Office	1.17.0

## 5. Configure Avaya Aura® Communication Manager

No special configuration is needed on Communication Manager but for completeness this section covers the station configuration for an Avaya 9650C IP Deskphone. The configuration is performed via the System Access Terminal (SAT) on Communication Manager.

### 5.1. Configure a Station for Avaya 96x0 Series IP Deskphone

Use the **add station** command to create a station for the 9650 IP Deskphone. Set the **Type** field to the station type to be emulated. In this example, *9650* was used. Configure a **Security Code** as the password to be used by the Avaya Deskphone to log in.

**Note:** To enable Auto Answer on the IP telephone set the **Auto Answer** field on **Page 2** (not shown) to the appropriate value, such as *all*.

```
add station 53005                                     Page 1 of 5
                                                    STATION
Extension: 53005                                     Lock Messages? n          BCC: 0
  Type: 9650                                         Security Code: 1234      TN: 1
  Port: IP                                           Coverage Path 1: 1       COR: 1
  Name: 9650 H323                                    Coverage Path 2:         COS: 1
                                                    Hunt-to Station:        Tests? y
STATION OPTIONS
  Loss Group: 19                                     Time of Day Lock Table:
  Speakerphone: 2-way                               Personalized Ringing Pattern: 1
  Display Language: english                         Message Lamp Ext: 53005
  Survivable GK Node Name:                          Mute Button Enabled? y
  Survivable COR: internal                           Button Modules: 0
  Survivable Trunk Dest? y                           Media Complex Ext:
                                                    IP SoftPhone? n
                                                    IP Video? n
  Short/Prefixed Registration Allowed: default
                                                    Customizable Labels? y
```

## 6. Configure Jabra LINK 35 and Jabra Motion Office

To connect Jabra Motion Office to an Avaya 96x0 Series IP Deskphone, use the supplied AUX cable to connect the Jabra LINK 35 EHS Adapter to the wireless base of Jabra Motion Office via the AUX port on each device. Connect the RJ-9 cable from the LINK 35 EHS adapter to the headset port of the 96x0 Series IP Deskphone. Connect the adhesive end on the ring sensor cable connected to the LINK 35 EHS adapter to the speakerphone grill of the Avaya 96x0 Series IP Deskphone. See the diagram below. Finally connect the cable that comes with the headset, from the headset base to the LINK 35 EHS adapter via the blue ports marked with a phone symbol (not shown).

**Connect ring sensor to  
speakerphone grill.**





## 7. Verification Steps

Verify that the Jabra LINK 35 and Jabra Motion Office have been connected to the Avaya 96x0 Deskphone. Once the headset is connected to the phone, verify that incoming and outgoing calls are established with two-way audio to the headset and that the headset can get dial tone and end an active call.

## 8. Conclusion

These Application Notes describe the configuration steps required to integrate Jabra LINK 35 EHS Adapter and Jabra Motion Office with Avaya 96x0 Deskphones from the 9600 Series of IP Deskphones. All test cases were completed successfully.

## 9. Additional References

This section references product documentation relevant to these Application Notes.

Documentation for Avaya products can be found at <http://support.avaya.com>.

[1] *Administering Avaya Aura® Communication Manager Release 6.3*, Document Number 03-300509, Issue 9, October 2013

[2] *Avaya Aura® Communication Manager Feature Description and Implementation Release 6.3*, Document Number 555-245-205, Issue 11, October 2013

[3] *Avaya one-X® Deskphone Edition for 9600 Series IP Telephones Installation and Maintenance Guide Release 3.2*, Document Number 16-300694, Issue 9, January 2013

Documentation for Jabra Motion Office and Jabra products can be found at <http://www.jabra.com>.

[4] *Jabra MOTION™ OFFICE User Manual*, Rev A, 2014

---

**©2014 Avaya Inc. All Rights Reserved.**

Avaya and the Avaya Logo are trademarks of Avaya Inc. All trademarks identified by ® and ™ are registered trademarks or trademarks, respectively, of Avaya Inc. All other trademarks are the property of their respective owners. The information provided in these Application Notes is subject to change without notice. The configurations, technical data, and recommendations provided in these Application Notes are believed to be accurate and dependable, but are presented without express or implied warranty. Users are responsible for their application of any products specified in these Application Notes.

Please e-mail any questions or comments pertaining to these Application Notes along with the full title name and filename, located in the lower right corner, directly to the Avaya DevConnect Program at [devconnect@avaya.com](mailto:devconnect@avaya.com).