



## Avaya Solution & Interoperability Test Lab

---

# Application Notes for Metropolis OfficeWatch Call Accounting System with Avaya IP Office 8.0 – Issue 1.0

### Abstract

These Application Notes describe the steps required to integrate the Metropolis OfficeWatch Call Accounting System with Avaya IP Office 8.0. Metropolis OfficeWatch Call Accounting System captures call records from Avaya IP Office using a Station Message Detail Recording (SMDR) link. In turn, Metropolis OfficeWatch processes the call records and generates detailed reports.

Information in these Application Notes has been obtained through DevConnect compliance testing and additional technical discussions. Testing was conducted via the DevConnect Program at the Avaya Solution and Interoperability Test Lab.

## 1. Introduction

These Application Notes describe the steps required to integrate the Metropolis OfficeWatch Call Accounting System with Avaya IP Office 8.0. Metropolis OfficeWatch Call Accounting System captures call records from Avaya IP Office using a Station Message Detail Recording (SMDR) link. In turn, Metropolis OfficeWatch processes the call records and generates detailed reports.

## 2. General Test Approach and Test Results

DevConnect Compliance Testing is conducted jointly by Avaya and DevConnect members. The jointly-defined test plan focuses on exercising APIs and/or standards-based interfaces pertinent to the interoperability of the tested products and their functionalities. DevConnect Compliance Testing is not intended to substitute full product performance or feature testing performed by DevConnect members, nor is it to be construed as an endorsement by Avaya of the suitability or completeness of a DevConnect member's solution.

This section describes the compliance testing used to verify interoperability of Metropolis OfficeWatch Call Accounting System with Avaya IP Office 8.0. This section covers the general test approach and the test results. The testing covered feature and serviceability test cases. The feature testing covered the ability of OfficeWatch to capture and process call records.

The call records captured and displayed by OfficeWatch were compared for accuracy to the call records displayed by Avaya IP Office Monitor. Call records for various call types were generated, including internal calls, inbound and outbound trunk calls, PSTN calls, transferred calls, and conference calls.

The serviceability testing focused on the ability of OfficeWatch to recover from adverse conditions such as loss of network connectivity. It was also verified that call records that were generated while OfficeWatch was disconnected from the network were not lost.

### 2.1. Interoperability Compliance Testing

Interoperability compliance testing covered the following features and functionality:

- Sending call records from IP Office to OfficeWatch for various call types, including internal calls, inbound and outbound trunks, PSTN calls, transferred calls, and conference calls
- Call records were captured and displayed on OfficeWatch
- Call records were processed by OfficeWatch, which generated detailed reports
- Proper system recovery after loss of network connectivity and power loss

## 2.2. Test Results

OfficeWatch passed compliance testing with Avaya IP Office 8.0.

## 2.3. Support

For technical support on Metropolis OfficeWatch Call Accounting System, contact Metropolis Customer Service by phone, through their website, or email.

**Phone:** (954) 414-2900 x32


**Web:** <http://www.metropolis.com/support.html>

**Email:** [support2012@metropolis.com](mailto:support2012@metropolis.com)

### 3. Reference Configuration

Figure 1 illustrates the configuration used for the compliance test. In the sample configuration, two sites, Sites A and B, are connected via an ISDN-PRI trunk. OfficeWatch only monitors the calls at Site B. Site A is primarily used to generate inter-site calls and PSTN calls.

Site A has an Avaya S8800 Servers running Avaya Aura® Communication Manager with an Avaya G650 Media Gateway. Site B consists of Avaya IP Office and Avaya IP and Digital Telephones. OfficeWatch connects via the LAN and establishes a SMDR link to IP Office at Site B.

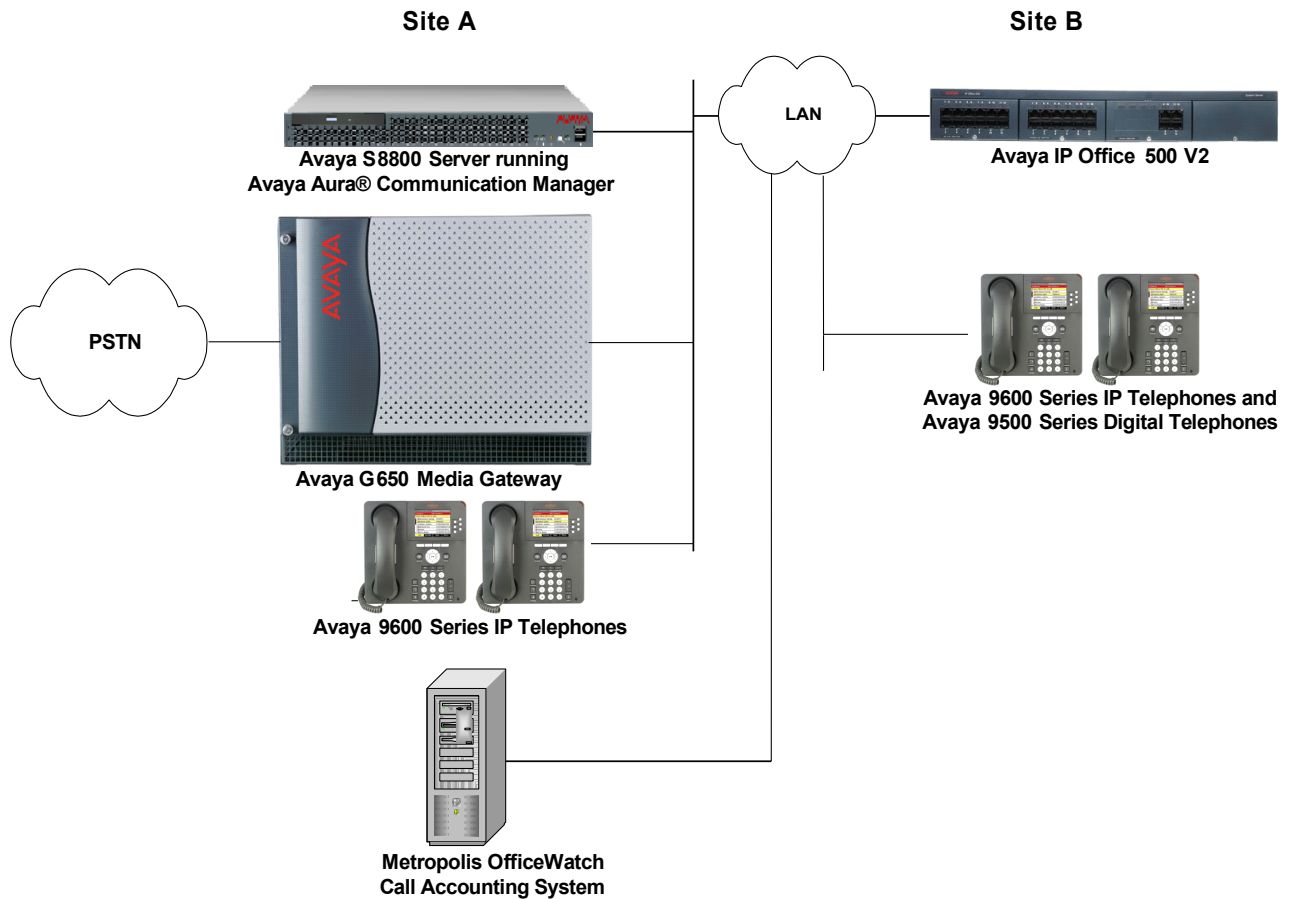

**Figure 1: Metropolis OfficeWatch Call Accounting System with Avaya IP Office**

## 4. Equipment and Software Validated

The following equipment and software/firmware were used for the sample configuration provided:


Equipment	Software/Firmware
Avaya IP Office	8.0(44)
Avaya Aura® Communication Manager running on Avaya S8800 Server with Avaya G650 Media Gateway.	6.0.1 (R016x.00.1.510.1) with Service Pack 5.01 (Patch 19303)
Avaya 9600 Series IP Telephones	3.1 SP 4 (H.323)
Avaya 9500 Series Digital Telephones	--
Metropolis OfficeWatch Call Accounting System	2012.07.20

## 5. Configure Avaya IP Office

This section describes the IP Office configuration at Site A that is required to interoperate with OfficeWatch. In the test configuration, OfficeWatch did not monitor Site B so only the configuration for Site A is shown. This section covers the configuration of the SMDR link.

Launch the Avaya IP Office Manager application, select the proper IP Office system, and log in with the appropriate credentials. From the configuration tree in the left pane, select **System** to display the **devcon-ipo** screen in the right pane. Select the **SMDR** tab. Select *SMDR Only* from the **Output** field drop-down list to display the **SMDR** section.

For **IP Address**, enter the IP address of the Metropolis OfficeWatch server. For **TCP Port**, enter *12000*. Modify the **Records to Buffer** field if desired, and check **Call Splitting for Diverts**. The record buffer is used by IP Office to cache SMDR records in the case of a communication failure with Metropolis OfficeWatch.

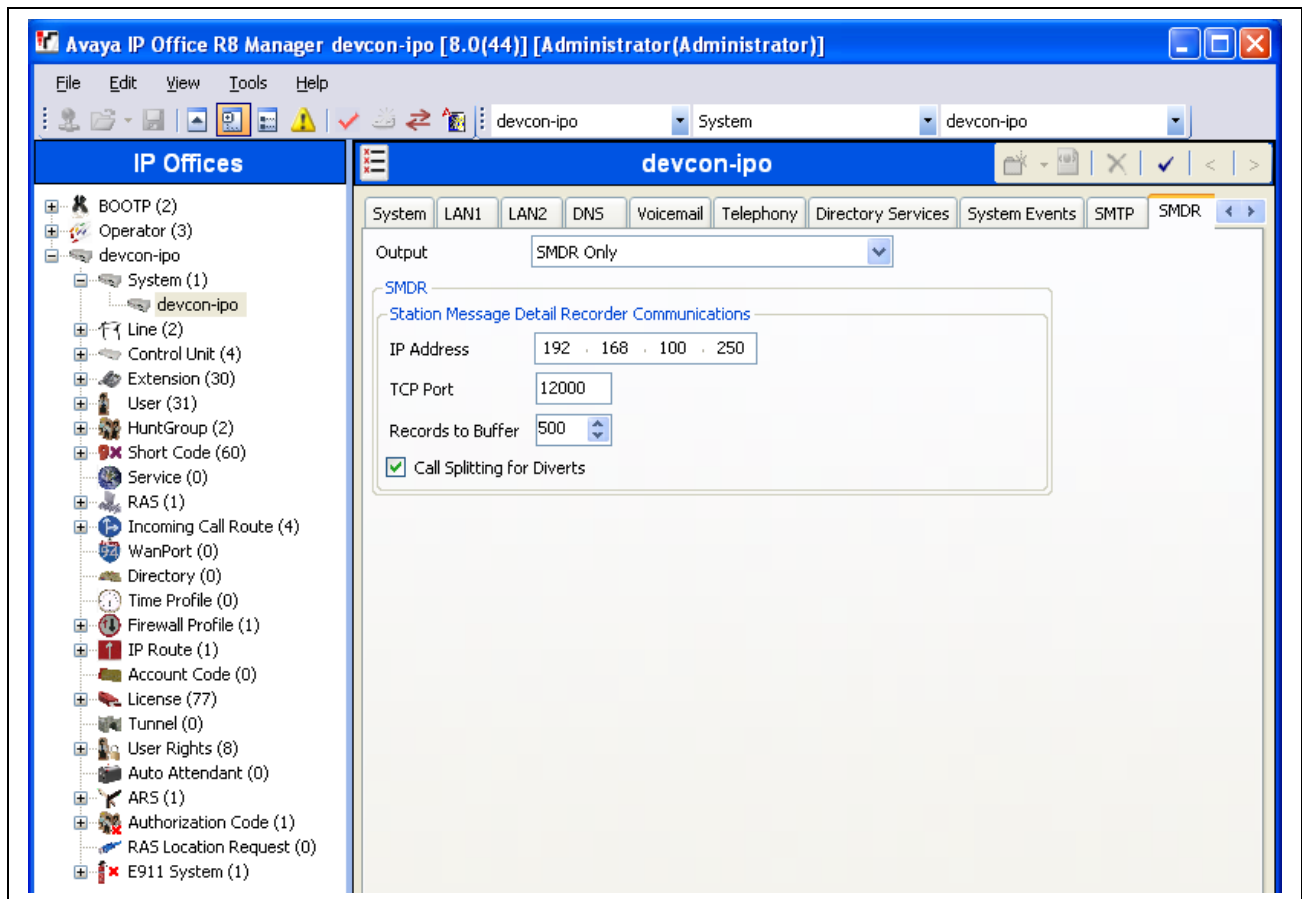

## 6. Configure Metropolis OfficeWatch Call Accounting System

This section provides the procedures for configuring Metropolis OfficeWatch Call Accounting System. The procedures include the following areas:


- Administer PBX
- Administer Customize
- Administer Grace Periods

### 6.1. Administer PBX

From the Metropolis OfficeWatch Call Accounting System server, launch **OfficeWatch** to display the **OfficeWatch Telemangement 2012** screen as shown below. Select **Setup** → **PBX** from the top menu.




The **Password Security** screen is displayed. Enter the appropriate credentials.

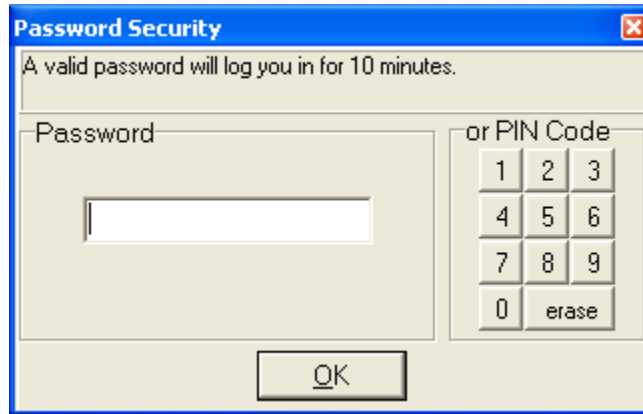

The **Select PBX** screen is displayed next. Enter the following values for the specified fields, and retain the default values for the remaining fields.

- **PBX Model:** Select an applicable type, in this case *Avaya IP Office SMDR (comma-based)*.
- **Receive data using:** *I.P. Port (PBX sends data to IP port)*
- **Listen Port:** The remote port number from **Section 5**.
- **Optional protocol:** *None selected*

Click **Modify PBX Settings** in the left pane.

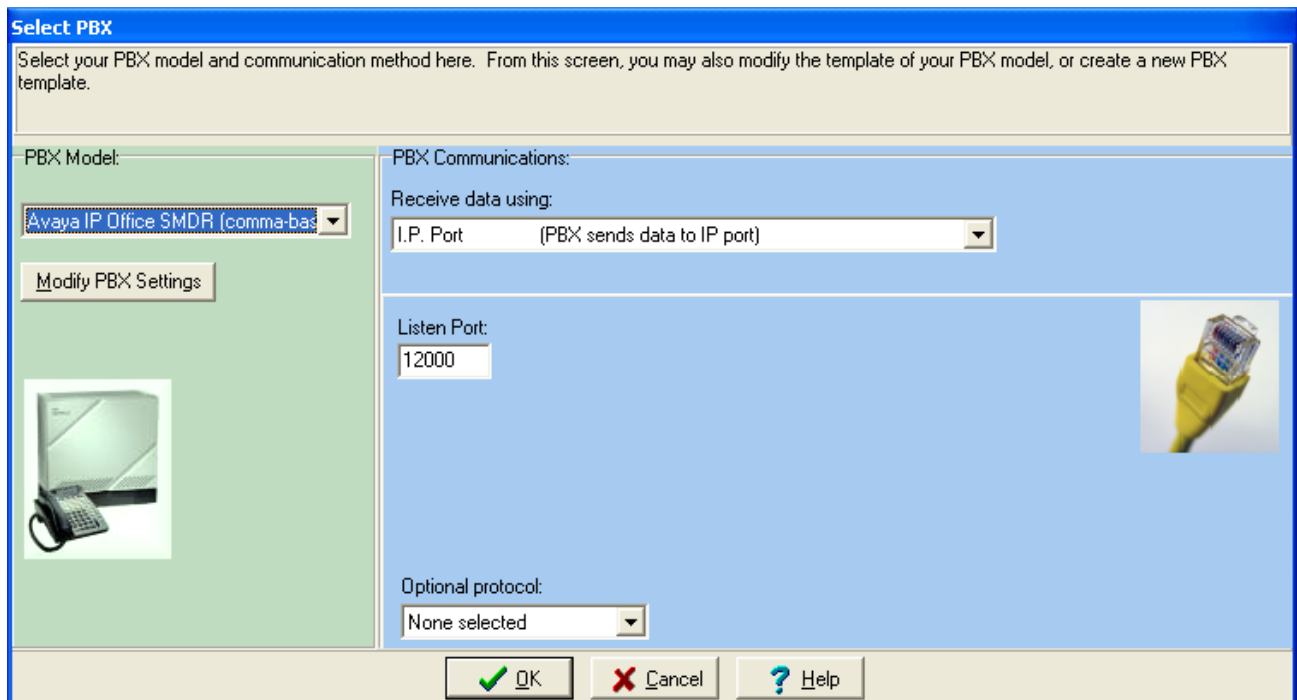



The **Modify PBX** screen is displayed. Note that in a live customer environment, SMDR data may start appearing in the top portion of the screen. Select the **Outgoing Calls** tab. For **Extension Length**, enter the maximum number of digits used for internal extensions on Avaya IP Office, in this case “5”. Retain the default values in the remaining fields.

**Modify PBX - Avaya IP Office SMDR (comma-based)**

Data Received from PBX

No data has been received from the PBX.

**Outgoing Calls** | Incoming Calls | Model | Filters | Translations | Trunks | Misc.

	Col	Format		Col	Length
Time:	1	2) hh:mm:ss	Extension:	12	5
Date:	1	24) yyyy/mm/dd	Digits:	6	15
Duration:	2	1) hh:mm:ss	Trunk:	0	0
			Account:	0	0
			PIN Code:	0	0

OK Cancel Help

Select the **Incoming Calls** tab. For **Extension Length**, enter the maximum number of digits used for internal extensions on Avaya IP Office. Retain the default values in the remaining fields.

**Modify PBX - Avaya IP Office SMDR (comma-based)**

Data Received from PBX

No data has been received from the PBX.

Outgoing Calls | **Incoming Calls** | Model | Filters | Translations | Trunks | Misc.

	Col	Format		Col	Length
Time:	1	2) hh:mm:ss	Extension:	12	5
Date:	1	24) yyyy/mm/dd	Digits:	4	15
Duration:	2	1) hh:mm:ss	Trunk:	0	0
			Account:	0	0
			PIN Code:	0	0
			Call ID Name:	0	0


Incoming Call Identifiers:  
Col: 5

Ascii Codes: 73 or 0 or 0 [Ascii Chart...](#)

## 6.2. Administer Customize


From the **OfficeWatch Telemanagement 2012** screen shown in **Section 6.1** select **Setup** → **Customize** from the top menu to display the **Customize** screen.

Check **Process Incoming calls** and **Process extension-to-extension (internal) calls**, if desired. Set the appropriate value for **Maximum Internal Extension Length**, and retain the default values in the remaining fields. The screenshot below shows the settings used for the compliance testing.

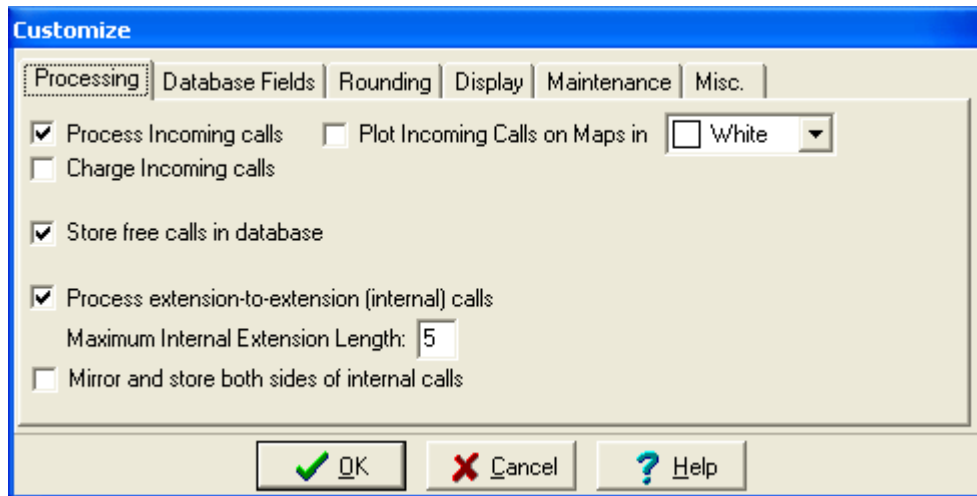

## 6.3. Administer Grace Periods

From the **OfficeWatch Telemanagement 2012** screen shown in **Section 6.1** select **Charges** → **Grace Periods** from the top menu to display the **Grace Periods** screen. Modify the grace period value for each type of call if desired. Note that calls with duration shorter than the grace period will not be logged. The screenshot below shows the settings used for the compliance testing.

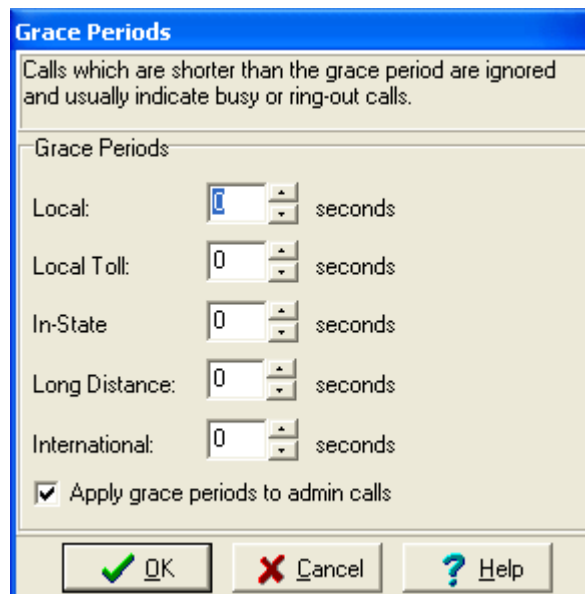


## 7. Verification Steps


This section provides the tests that can be performed to verify proper configuration of Avaya IP Office and Metropolis OfficeWatch Call Accounting System.

### 7.1. Verify Avaya IP Office


Launch the Avaya IP Office Monitor application to display the **Avaya IP Office R8.0 SysMonitor** screen as shown below. Click on the **Filter** icon.

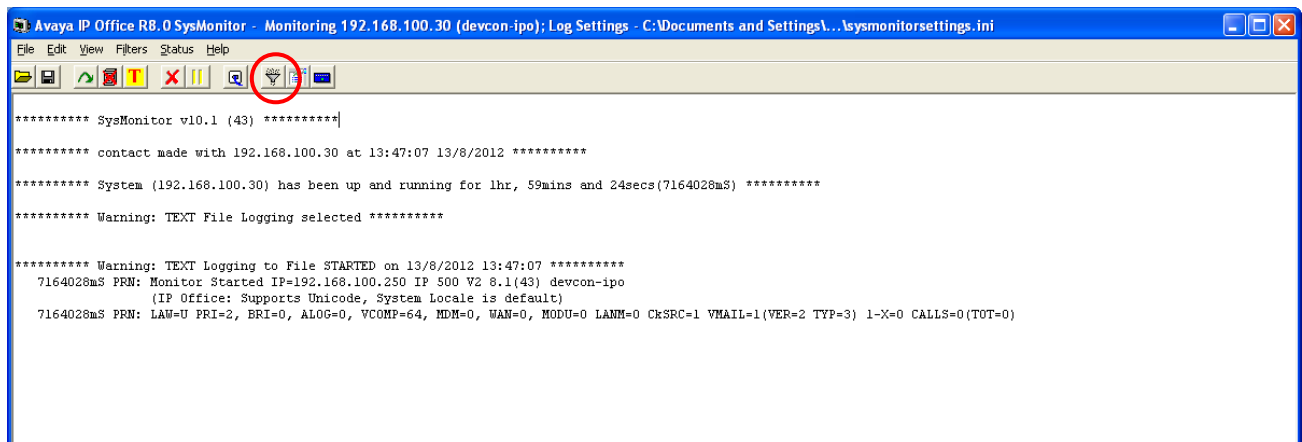

The **All Settings** screen is displayed. Check **Call Detail Records** and **CDR Extra diagnostics** as shown below.

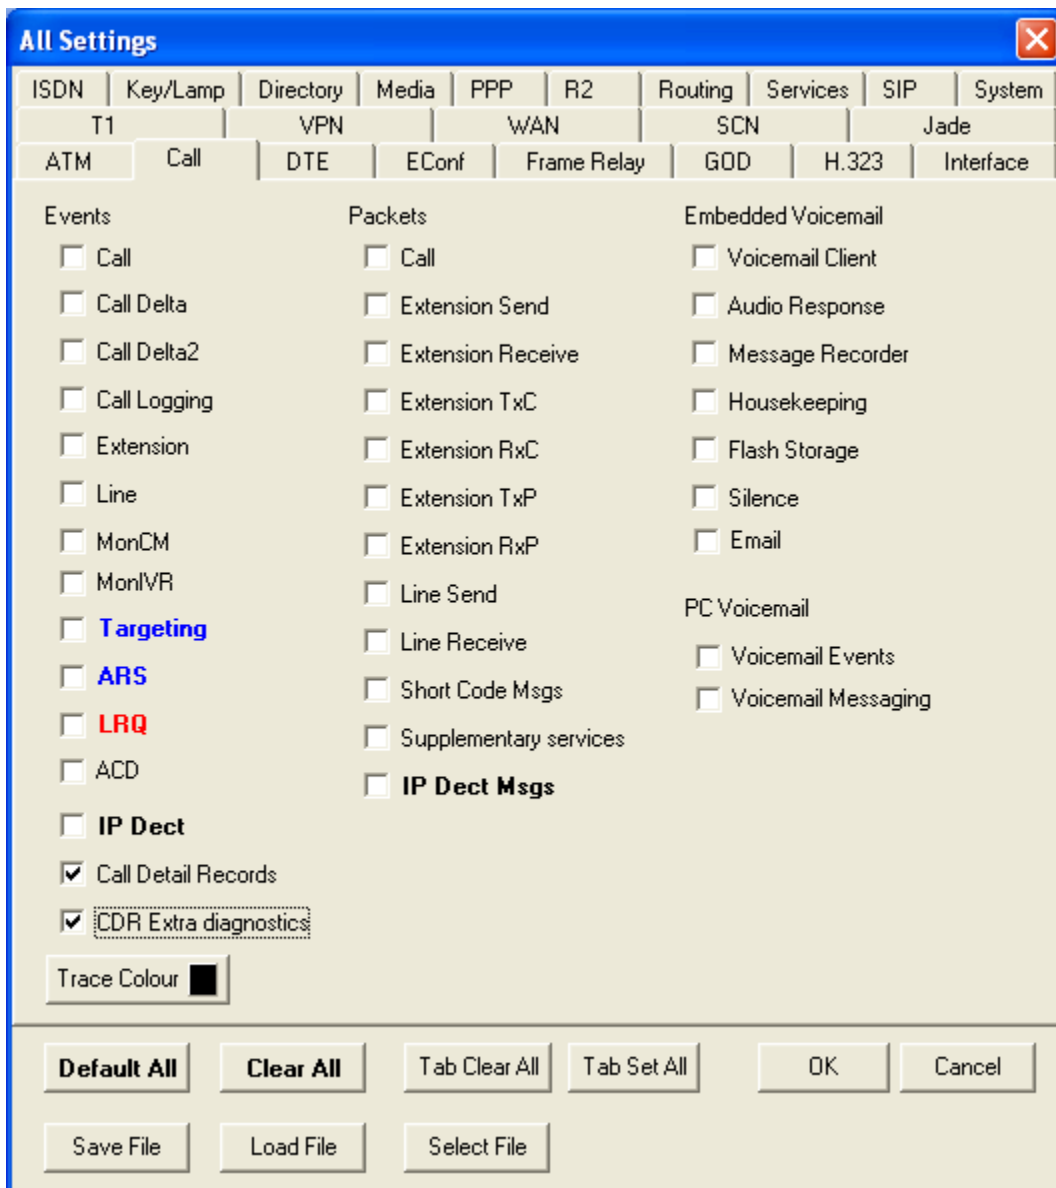

Make and complete a few phone calls, including internal, inbound from the PSTN, and outbound to the PSTN. Verify that raw SMDR data is displayed on the **Avaya IP Office R8.0 SysMonitor** screen as shown below.

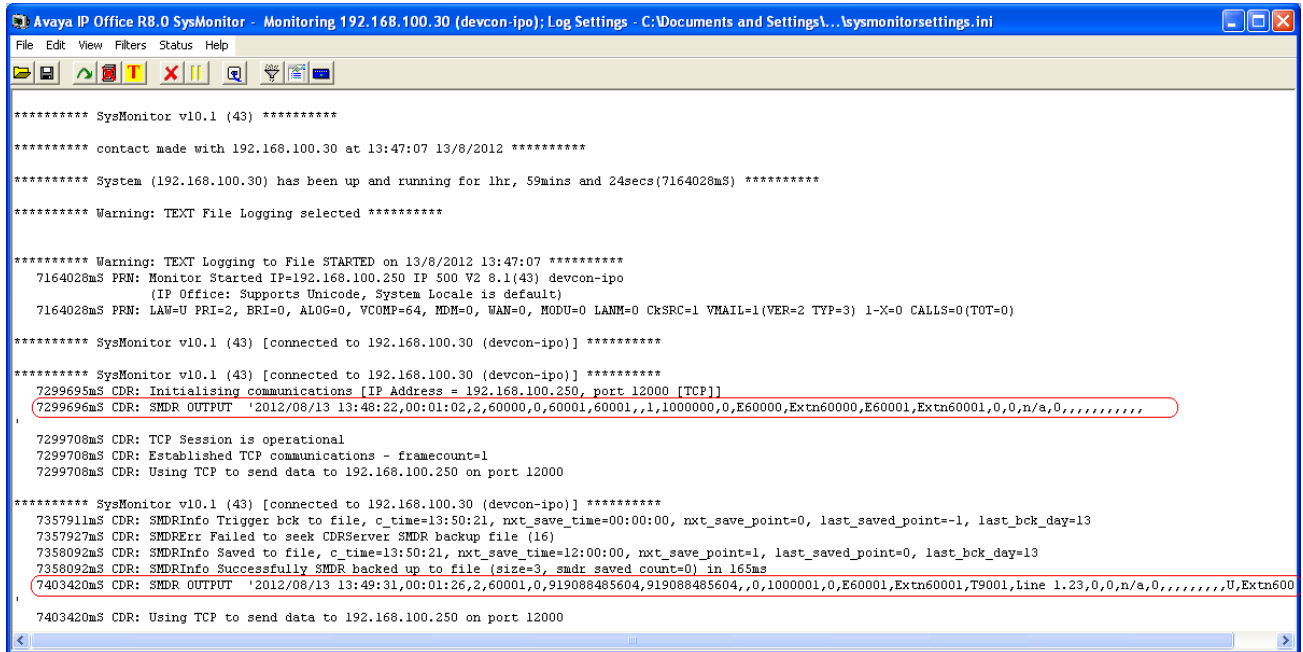

## 7.2. Verify Metropolis OfficeWatch Call Accounting System

From the Metropolis OfficeWatch server, follow the navigation in **Section 6.1** to display the **OfficeWatch Telemangement 2012** screen. Verify that an entry is displayed for each SMDR record output from **Section 7.1**. Note that the **Cost** data shown below is estimated by OfficeWatch based on call destination and duration.

The screenshot displays the OfficeWatch Telemangement 2012 application window. The main area shows a table of call records with the following data:

Date	Time	Ext	Digits	Location	Duration	Class	Cost	Total
08/13/12	13:48	60000	60001	Internal_Ext	00:01:02	EXT	\$0.00	\$0.00
08/13/12	13:49	60001	9088485604	NJ-Bernardsvl	00:01:26	LDC	\$0.20	\$0.00

Below the table, there is a 'Volume' graph showing call volume over time, with a peak at 1:52p. To the right of the graph is a system status panel with indicators for PBX (green), Disk (green), and Support (green). A world map is also visible, with a location marker in the US. The status bar at the bottom shows 'Status: OK' and 'PBX: OK'.

Follow the navigation in **Section 6.1** to display the **Modify PBX** screen. In the top portion of the screen, verify that an entry is displayed for each SMDR record output from **Section 7.1** with matching values.

**Modify PBX - Avaya IP Office SMDR (comma-based)**

Data Received from PBX

Column 1	Column 2	Column 3	Column 4	Column 5	Column 6	Column 7	Co
2012/08/13 13:48:22	00:01:02	2	60000	0	60001	60001	
2012/08/13 13:49:31	00:01:26	2	60001	0	919088485604	919088485604	

Outgoing Calls | Incoming Calls | Model | Filters | Translations | Trunks | Misc.

	Col	Format		Col	Length
Time:	1	2) hh:mm:ss	Extension:	12	5
Date:	1	24) yyyy/mm/dd	Digits:	6	15
Duration:	2	1) hh:mm:ss	Trunk:	0	0
			Account:	0	0
			PIN Code:	0	0

OK Cancel Help



From the **OfficeWatch Telemanagement 2012** screen (not shown below), select **Reports** → **Report Generator** from the top menu. The **Reports Generator** screen is displayed. Select **Extension** → **Extension Details Report** from the top menu, and click **Report**.

The screenshot shows the 'Reports Generator' application window with the 'Extension Details Report' selected. The interface includes a menu bar with options like 'Extension', 'Dept', 'Account', 'Directories', 'Profit', 'Trunk', 'Time', 'Caller', 'Other', 'Custom', and 'Options'. Below the menu is a title bar for the report and a descriptive text box. The main area contains several input fields: 'Extension Range' (0 to 999999), 'Date and Time Range' (13-Aug-12, 00:00), 'To' (13-Aug-12, 23:59), and 'Sort entries by' (Extension). There is also a checkbox for 'Start each extension on a new page'. To the right, a 'Departments' list is shown with a 'Clear All' button, containing items like 'Default Staff', 'Reception', 'Sales Dept', 'Customer Service', 'Accounting', 'Marketing', 'Shipping', 'GeoGlobal Inc. Offices', 'Transworld Inc. Offices', 'Board Rooms', and 'Leased Offices'. Below this is an 'Include Calls of Type' dropdown set to 'Outgoing + Incoming'. At the bottom left, there are options for 'Send output to' (Screen, Printer, File) and an 'Email' checkbox. At the bottom right, there are three buttons: 'Report!', 'Close', and 'Help'.

The **Extension Details Report** automatically pops up in a browser window. Verify that the report entries match to the entries on the **OfficeWatch Telemangement 2010** screen.

OfficeWatch - Extension Details Report - Windows Internet Explorer

C:\OfficeWatch\report.htm

OfficeWatch - Extension Details Report

Extension Details Report  
 Outgoing + Incoming calls  
 Extension Range: 0 to 999999  
 Date Range: 13-Aug-12 to 13-Aug-12

DEV CONNECT DEMO  
 BASKING RIDGE, NJ

Report Date: 13-Aug-12 13:53:02

Dept: Default Staff  
 Ext: 60000

Date	Time	Number Dialed	Location	Duration	Charge	Tax	Total
08/13/12	13:48	60001	Internal_Ext	00:01:02	0.00	0.00	0.00
		<b>Calls: 1</b>	<b>Average Dur: 01:02</b>	<b>00:01:02</b>	<b>0.00</b>	<b>0.00</b>	<b>0.00</b>

Dept: Default Staff  
 Ext: 60001

Date	Time	Number Dialed	Location	Duration	Charge	Tax	Total
08/13/12	13:49	9088485604	NJ-Bernardsvl	00:01:26	0.00	0.00	0.00
		<b>Calls: 1</b>	<b>Average Dur: 01:26</b>	<b>00:01:26</b>	<b>0.00</b>	<b>0.00</b>	<b>0.00</b>

**Totals**

<b>Total Calls: 2</b>				<b>00:02:28</b>	<b>0.00</b>	<b>0.00</b>	<b>0.00</b>
-----------------------	--	--	--	-----------------	-------------	-------------	-------------

My Computer 100%

## 8. Conclusion

These Application Notes describe the steps required to configure Metropolis OfficeWatch Call Accounting System to interoperate with Avaya IP Office 8.0. All feature and serviceability tests were completed successfully.

## 9. Additional References

This section references the product documentation relevant to these Application Notes.

- [1] *Avaya IP Office R8.0 Manager 10.0*, August 8<sup>th</sup> 2012, Issue 28p, Document Number 15-601011, available at <http://support.avaya.com>.
- [2] *Metropolis OfficeWatch Call Accounting User Guide*, available at <http://www.metropolis.com>.

---

**©2012 Avaya Inc. All Rights Reserved.**

Avaya and the Avaya Logo are trademarks of Avaya Inc. All trademarks identified by ® and ™ are registered trademarks or trademarks, respectively, of Avaya Inc. All other trademarks are the property of their respective owners. The information provided in these Application Notes is subject to change without notice. The configurations, technical data, and recommendations provided in these Application Notes are believed to be accurate and dependable, but are presented without express or implied warranty. Users are responsible for their application of any products specified in these Application Notes.

Please e-mail any questions or comments pertaining to these Application Notes along with the full title name and filename, located in the lower right corner, directly to the Avaya DevConnect Program at [devconnect@avaya.com](mailto:devconnect@avaya.com).