



Application Notes for Jabra PC Suite and Jabra Motion Office with Avaya one-X[®] Agent – Issue 1.0

Abstract

These Application Notes describe a solution comprised of Avaya one-X[®] Agent, Jabra PC Suite and Jabra Motion Office. Jabra Motion Office is a wireless headset that uses Jabra PC Suite software installed on the PC running Avaya one-X[®] Agent to control calls.

Readers should pay attention to Section 2, in particular the scope of testing as outlined in Section 2.1 as well as the observations noted in Section 2.2, to ensure that their own use cases are adequately covered by this scope and results.

Information in these Application Notes has been obtained through DevConnect compliance testing and additional technical discussions. Testing was conducted via the DevConnect Program at the Avaya Solution and Interoperability Test Lab.

1. Introduction

These Application Notes describe the configuration steps required for Jabra PC Suite software and Jabra Motion Office to successfully interoperate with Avaya one-X[®] Agent and Avaya Aura[®] Communication Manager. The Jabra Motion Office Headset connects to the PC running Avaya one-X[®] Agent via a USB cable and the Jabra PC Suite software serves as an interface between Avaya one-X[®] Agent and Jabra Motion Office.

2. General Test Approach and Test Results

The compliance testing of Jabra Motion Office and Jabra PC Suite software interoperating with Avaya one-X Agent was manually performed. No performance testing was done and the tests listed in **Section 2.1** were executed and verified.

DevConnect Compliance Testing is conducted jointly by Avaya and DevConnect members. The jointly-defined test plan focuses on exercising APIs and/or standards-based interfaces pertinent to the interoperability of the tested products and their functionalities. DevConnect Compliance Testing is not intended to substitute full product performance or feature testing performed by DevConnect members, nor is it to be construed as an endorsement by Avaya of the suitability or completeness of a DevConnect member's solution.

Avaya's formal testing and Declaration of Conformity is provided only on the headsets/handsets that carry the Avaya brand or logo. Avaya may conduct testing of non-Avaya headset/handset to determine interoperability with Avaya phones. However, Avaya does not conduct the testing of non-Avaya headsets/handsets for: Acoustic Pressure, Safety, Hearing Aid Compliance, EMC regulations, or any other tests to ensure conformity with safety, audio quality, long-term reliability or any regulation requirements. As a result, Avaya makes no representations whether a particular non-Avaya headset will work with Avaya's telephones or with a different generation of the same Avaya telephone.

Since there is no industry standard for handset interfaces, different manufacturers utilize different handset/headset interfaces with their telephones. Therefore, any claim made by a headset vendor that its product is compatible with Avaya telephones does not equate to a guarantee that the headset will provide adequate safety protection or audio quality.

2.1. Interoperability Compliance Testing

The compliance testing included the following test scenarios with one-X Agent using the H.323 protocol.

- Verification of acceptable two-way audio path for local and PSTN calls
- Jabra Motion Office mute button operation
- Jabra Motion Office volume controls
- Jabra Motion Office Multi-function button (MFB) for answering and terminating calls remotely
- Interoperability with one-X Agent controls
- Interoperability with voicemail

The serviceability testing focused on verifying the ability of Jabra Motion Office to recover from adverse conditions, such as disconnecting and reconnecting the USB cable, restarting one-X Agent, power cycling the Jabra Motion Office and walking out and back into wireless range.

2.2. Test Results

The objectives outlined in **Section 2.1** were verified and all test cases passed.

2.3. Support

For technical support for the Jabra Motion Office Headset, and Jabra products in general, please refer to www.jabra.com. On the Jabra website, support hotline numbers can be found for specific countries.

3. Reference Configuration

Figure 1 illustrates the test configuration used during the compliance testing between Avaya one-X Agent, Jabra Motion Office and Jabra PC Suite.

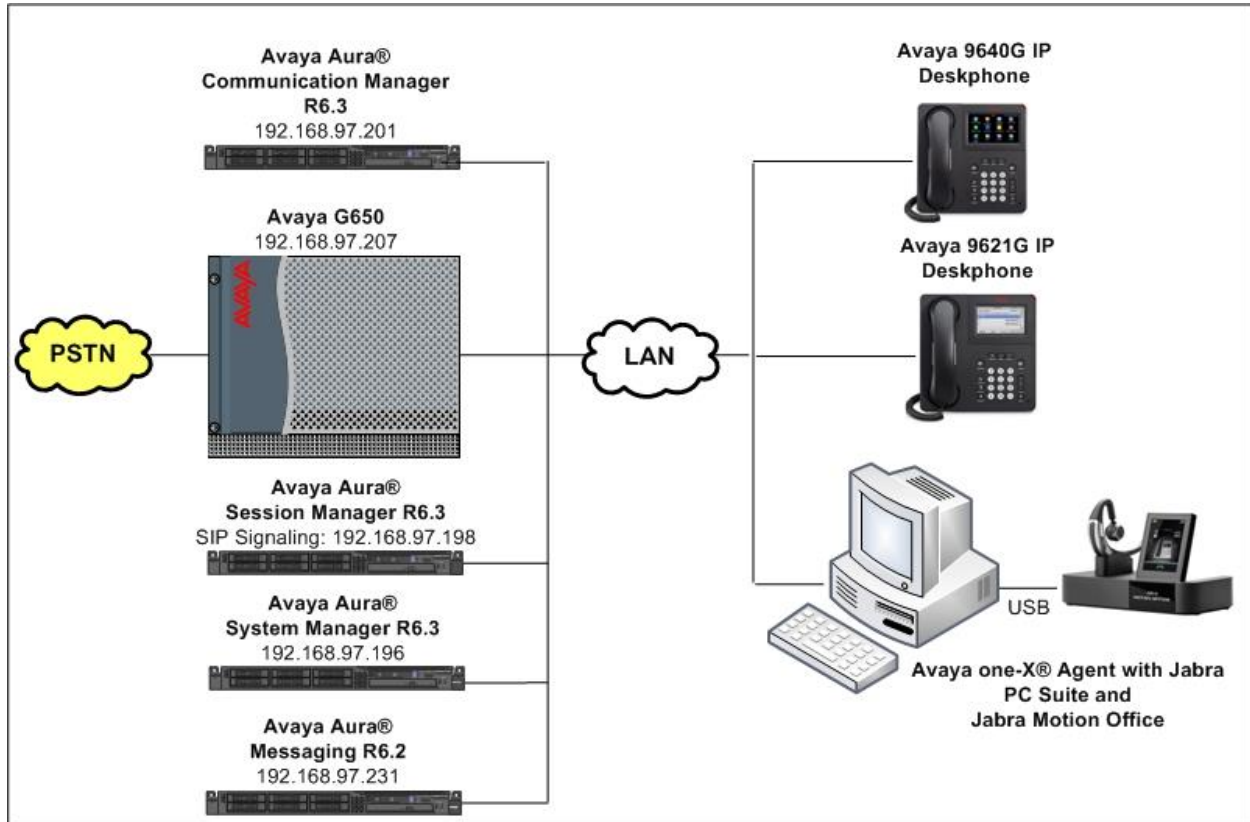


Figure 1: Reference Configuration Diagram

4. Equipment and Software Validated

The following equipment and software was used during the lab testing:

Equipment/Software	Release/Version
Avaya Aura® Session Manager running on S8800 Server	Release: 6.3.2.0.632023
Avaya Aura® System Manager running on S8800 Server	6.3.0 - FP2 Build No. - 6.3.0.8.5682-6.3.8.1627
Avaya Aura® Communication Manager running on Avaya S8800Server	R016x.03.0.124.0 patch 21172
Avaya G650 Media Gateway IPSI TN2312BP CLAN TN799DP IP Media Processor TN2302AP Digital Line TN2224	HW06, FW043 HW01, FW026 HW20, FW117 000006
Avaya Aura® Messaging	6.2
Avaya one-X® Agent	2.5.5 (2.5.50022.0)
Avaya 9621G IP Deskphone (SIP)	6.3.0.73
Avaya 9640 IP Deskphone (H.323)	3.2.1
Jabra PC Suite	2.14.5888
Jabra Motion Office	1.17.0

5. Configure Avaya Aura® Communication Manager

These Application Notes assume that Communication Manager is configured and operational. There is no Communication Manager configuration for Jabra Motion Office to interoperate with Avaya one-X Agent.

This section describes the steps to provision a station for Avaya one-X Agent in Communication Manager by System Administration Terminal (SAT). For detailed information on how to configure and administer Communication Manager, please refer to **Section 10 [1]**.

Use the SAT command **add station x** to add a new extension in Communication Manager where **x** is the new extension number as in the figure below. Enter the model of IP deskphone in the **Type** field, a name in the **Name** field, a code in the **Security Code** field and 'y' in the **IP Softphone?** field and keep the other fields as default.

```
add station 53055                                     Page 1 of 5

                                STATION

Extension: 53055                                Lock Messages? n                BCC: 0
Type: 9620                                       Security Code: 12345            TN: 1
Port: IP                                         Coverage Path 1:                COR: 1
Name: IP Softphone One-X                       Coverage Path 2:                COS: 1
                                                Hunt-to Station:                Tests? y

STATION OPTIONS

                                Time of Day Lock Table:
Loss Group: 19                                Personalized Ringing Pattern: 1
Speakerphone: 2-way                           Message Lamp Ext: 53055
Display Language: english                     Mute Button Enabled? y
Survivable GK Node Name:
Survivable COR: internal                       Media Complex Ext:
Survivable Trunk Dest? y                       IP SoftPhone? y

                                IP Video Softphone? n
Short/Prefixed Registration Allowed: default

                                Customizable Labels? y
```


6. Configure Avaya one-X® Agent

Select  → **Agent Preferences** as shown below.



The **Agent Preferences** window appears as shown below. Select **Audio** from the left pane and select the **Advanced** tab.

In the **Advanced** tab, select **Jabra Motion Office** in the **Playback Device** and **Recording Device** sections. Click the **OK** button to close the window. Please note that Jabra Motion Office needs to be connected to the PC as in **Section 7.2** before Avaya one-X Agent is started so it will be available for selection on the following screen.

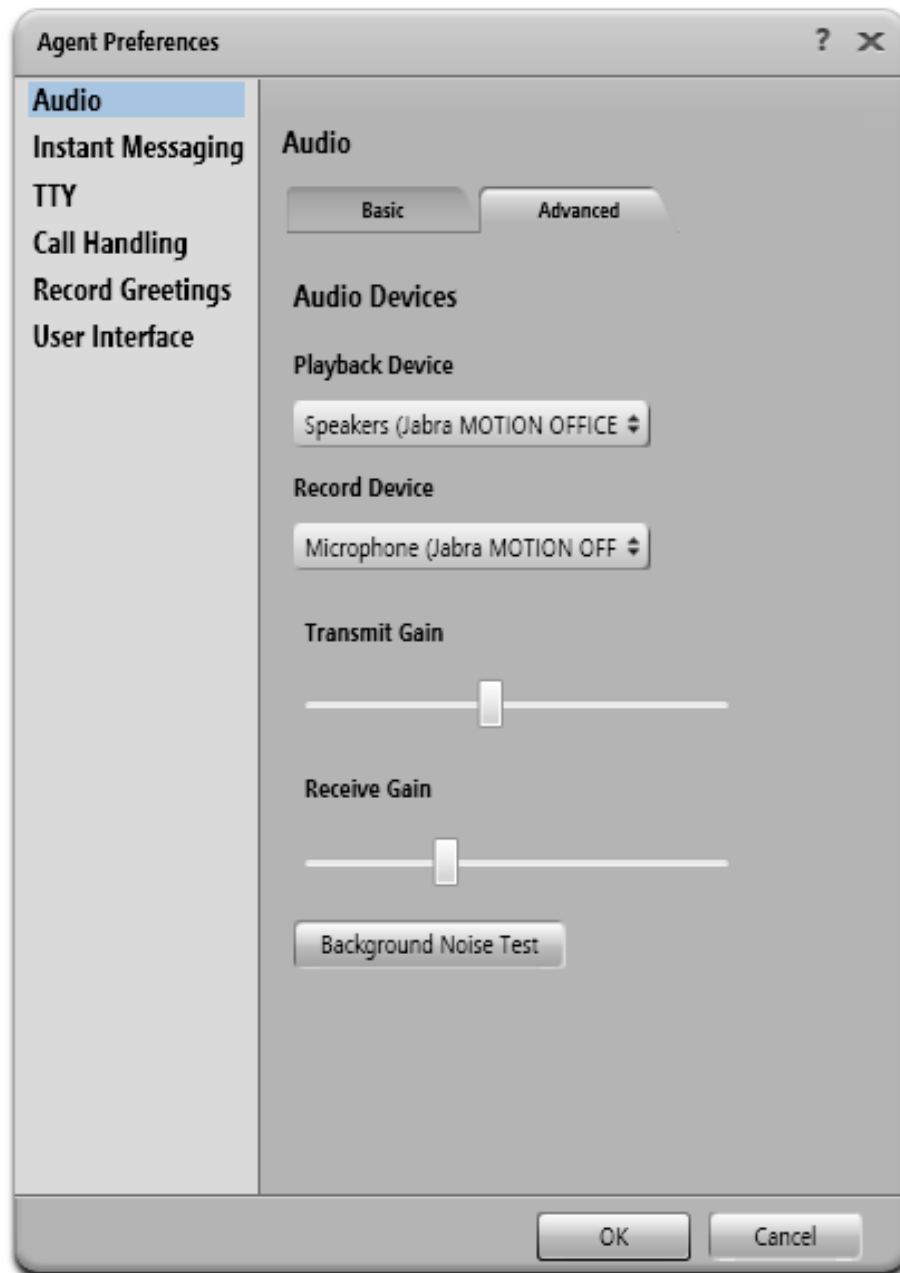


7. Configure Jabra Motion Office


This section describes the configuration steps for Jabra Motion Office and Jabra PC Suite for operation with Avaya one-X Agent. For more information on how to use Jabra Motion Office please refer to the manual listed in **Section 10 [4]**.

7.1. Configure Jabra PC Suite

Included in the Jabra PC Suite is the Jabra Control Center program. The Jabra Control Center program serves as an interface between the Motion Office and Avaya one-X Agent. The **Headset** tab of **Jabra Control Center** displays the type of headset which the program is managing and its configuration as shown below.

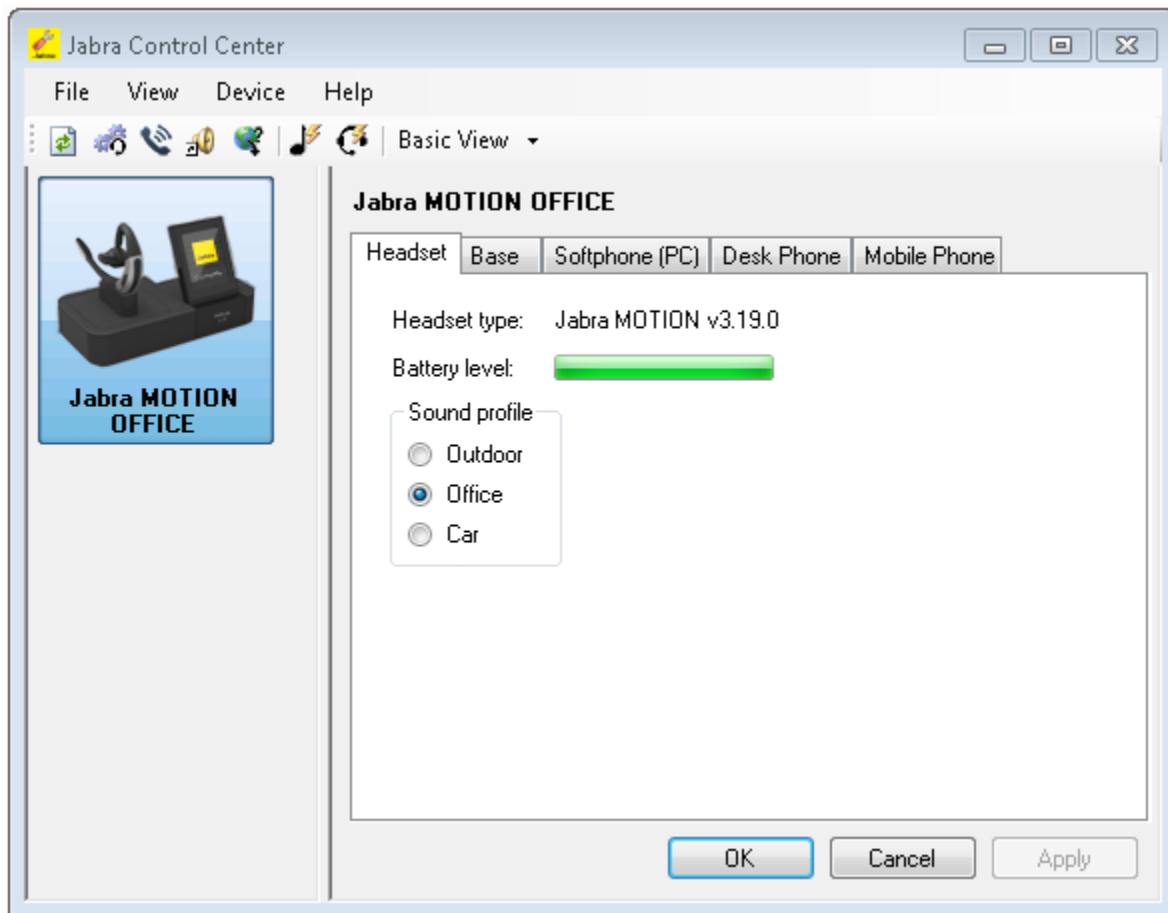


Click on the **Softphone** tab and verify that **Connect to softphone (PC)** is selected as shown.

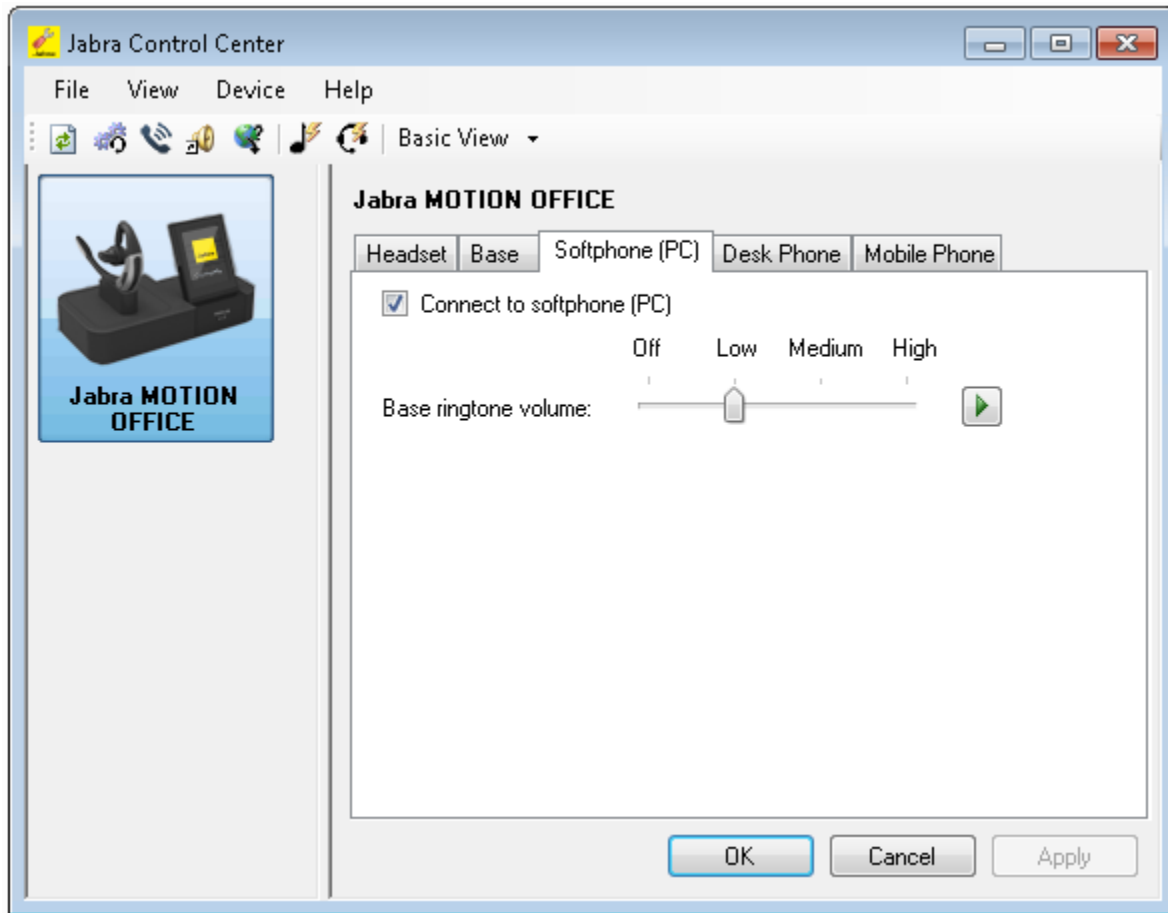

Click the **Apply** button to apply any changes and then click the **OK** button.

7.2. Connect Jabra Motion Office to PC

The following procedure shows the steps to connect Jabra Motion Office to the PC.


- Plug the supplied USB cable into the port marked  on the Jabra Motion Office base
- Connect the other end of the USB cable to a free USB port on the PC

This should be done before starting Avaya one-X Agent as in **Section 6**.

8. Verification Steps

This section provides tests that can be performed to verify proper installation and configuration of Jabra PC Suite and Jabra Motion Office with Avaya one-X Agent.

Included in the Jabra PC Suite is the Jabra Device Service program. Run the **Jabra Device Service** program and verify that the **Softphone Status** for **Avaya one-X / Aura Agent Desktop** is **Connected** as shown below.

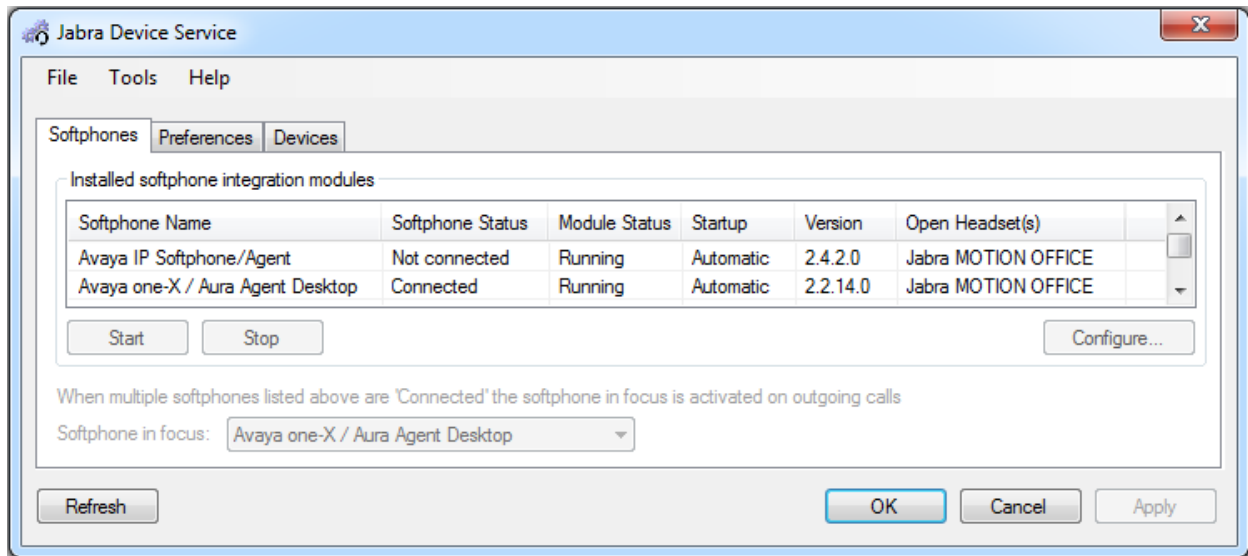

Perform a test call as follows:

- Start the Avaya one-X Agent application
- Place an incoming call to Avaya one-X Agent
- Answer the call using the Multi-function button on the headset
- Verify two-way talk path between the headset and the calling phone
- Disconnect the call from the headset using the Multi-function button
- Verify that the call is properly disconnected

9. Conclusion

These Application Notes describe the configuration steps required for Jabra Motion Office and Jabra PC Suite to interoperate with Avaya one-X[®] Agent. All feature and serviceability test cases were completed and passed as per **Section 2**.

10. Additional References

This section references product documentation relevant to these Application Notes.

Documentation for Avaya products can be found at <http://support.avaya.com>.

- [1] *Administering Avaya Aura® Communication Manager*, Release 6.3, Document Number 03-300509, Issue 9, October 2013
- [2] *Avaya Aura® Communication Manager Feature Description and Implementation*, Release 6.3, Document Number 555-245-205, Issue 11, October 2013
- [3] *Administering Avaya one-X® Agent*, Release 2.5.4 (h.323), Issue 1, December 2013

Documentation for Jabra Motion Office and Jabra products can be found at <http://www.jabra.com>.

- [4] *Jabra MOTION™ OFFICE User Manual*, Rev A, 2014

©2014 Avaya Inc. All Rights Reserved.

Avaya and the Avaya Logo are trademarks of Avaya Inc. All trademarks identified by ® and ™ are registered trademarks or trademarks, respectively, of Avaya Inc. All other trademarks are the property of their respective owners. The information provided in these Application Notes is subject to change without notice. The configurations, technical data, and recommendations provided in these Application Notes are believed to be accurate and dependable, but are presented without express or implied warranty. Users are responsible for their application of any products specified in these Application Notes.

Please e-mail any questions or comments pertaining to these Application Notes along with the full title name and filename, located in the lower right corner, directly to the Avaya DevConnect Program at devconnect@avaya.com.