

Avaya Solution & Interoperability Test Lab

Application Notes for Jabra PRO 920 Wireless Headsets with Avaya 96x1 Series IP Deskphones - Issue 1.0

Abstract

These Application Notes describe the configuration steps required to integrate the Jabra PRO 920 Wireless Headsets with Avaya 96x1 Series IP Deskphones.

Readers should pay attention to section 2, in particular the scope of testing as outlined in Section 2.1 as well as the observations noted in Section 2.2, to ensure that their own use cases are adequately covered by this scope and results.

Information in these Application Notes has been obtained through DevConnect compliance testing and additional technical discussions. Testing was conducted via the DevConnect Program at the Avaya Solution and Interoperability Test Lab.

1. Introduction

These Application Notes describe the configuration steps required to integrate the Jabra PRO 920 Wireless Headsets with Avaya 96x1 Series IP Deskphones. The Jabra PRO 920 Wireless Headset was used to exercise the call control functions.

2. General Test Approach and Test Results

DevConnect Compliance Testing is conducted jointly by Avaya and DevConnect members. The jointly-defined test plan focuses on exercising APIs and/or standards-based interfaces pertinent to the interoperability of the tested products and their functionalities. DevConnect Compliance Testing is not intended to substitute full product performance or feature testing performed by DevConnect members, nor is it to be construed as an endorsement by Avaya of the suitability or completeness of a DevConnect member's solution.

Avaya's formal testing and Declaration of Conformity is provided only on the headsets/handsets that carry the Avaya brand or logo. Avaya may conduct testing of non-Avaya headset/handset to determine interoperability with Avaya phones. However, Avaya does not conduct the testing of non-Avaya headsets/handsets for: Acoustic Pressure, Safety, Hearing Aid Compliance, EMC regulations, or any other tests to ensure conformity with safety, audio quality, long-term reliability or any regulation requirements. As a result, Avaya makes no representations whether a particular non-Avaya headset will work with Avaya's telephones or with a different generation of the same Avaya telephone.

Since there is no industry standard for handset interfaces, different manufacturers utilize different handset/headset interfaces with their telephones. Therefore, any claim made by a headset vendor that its product is compatible with Avaya telephones does not equate to a guarantee that the headset will provide adequate safety protection or audio quality.

The interoperability compliance test included feature and serviceability testing. The feature testing focused on placing calls to Communication Manager Extensions, answering and ending calls using the call control button on the headset, and verifying two-way audio. The call types included calls between local extensions, and from the PSTN.

The serviceability testing focused on verifying the usability of the Jabra headset solution after reconnecting the Jabra headset to the Deskphone.

2.1. Interoperability Compliance Testing

All test cases were performed manually. The following features were verified:

- Placing calls to internal extensions to verify two-way audio.
- Placing calls from the PSTN and to Voicemail to verify two-way audio.
- Answering and ending calls using the call control button on the headset.
- Using the Voice Control button on the Jabra headset to mute and un-mute the audio.
- Verifying incoming call notification on Jabra headset.
- Verifying call ended notification on Jabra headset.

For the serviceability testing, the Jabra headset was disconnected from the Avaya 96x1 IP Deskphone to confirm proper operation of the headset after it was reconnected.

2.2. Test Results

All test cases passed.

2.3. Assumptions

These Application Notes do not provide any configuration details for the following list of assumptions:

- Avaya Aura® Communication Manager has been installed and is operational.
- Avaya 96x1 Series IP Deskphones has been installed and operational.

2.4. Support

For support on this Jabra headset solution, contact Jabra Technical Support at:

■ Phone: (800) 697-8757

Website: http://www.jabra.com/NA-US/Support/pages/Default.aspx

■ Email: <u>JabraSupport.US@jabra.com</u>

3. Reference Configuration

Figure 1 illustrates the test configuration used to verify the Jabra PRO 920 Wireless Headsets solutions. The configuration consists of Avaya Aura® Communication Manager with and Avaya G430 Media Gateway providing connectivity to the PSTN via an ISDN-PRI trunk. The Jabra headsets were connected to the Avaya 96x1 Series IP Deskphones via a Jabra LINK 33 EHS Cable connected to the headset port.

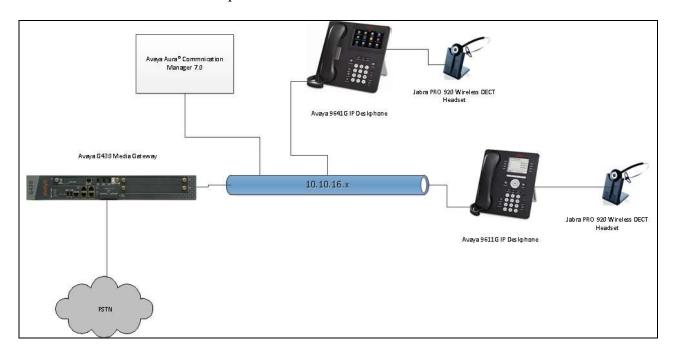


Figure 1: Avaya 96x1 Series IP Deskphones with 920 PRO Wireless Headsets

4. Equipment and Software Validated

The following equipment and software were used for the sample configuration provided.

Equipment/Software	Release/Version	
Avaya Aura® Communication Manager	R17x.00.0.441.0	
	Build 7.0.0.3.0.441.22856	
Avaya Communicator for Windows	2.1.3.80	
G430 Media Gateway	R37.21.0	
9611G IP Deskphone H.323 9641G IP Deskphone H.323	R6.6029	
Jabra 920 PRO Wireless Headset	NA	

5. Configure Avaya Aura® Communication Manager

This section will add stations to allow the 96x1 IP deskphone to register with Communication Manager. These are H.323 stations that must be configured with the following.

- A maximum of 3 Call Appearance lines per agent station
- Restrict Last Appearance must be enabled on all agent stations

Issue **add station** <**n**> command, where **n** is an available extension number. Enter the following values for the specified fields, and retain the default values for the remaining fields.

- **Type:** Enter station type **9630**
- Name: A descriptive name.
- **Security Code:** Enter a valid code ex: 1234.

add station 8270006		Page	Э	1 of	5
STATION					
Extension: 8270006		Lock Messages? n		BCC	C: 0
Type: 9630	Security Code: 1234 TN: 1				J: 1
Port: IP		Coverage Path 1:		COF	₹: 1
Name: Jabra Station		Coverage Path 2:		CC	S: 1
Hunt-to Station:					
STATION OPTIONS					
	Time of Day Lock Table:				
Loss Group:	19	Personalized Ringing Pattern:	1		
		Message Lamp Ext:	510	02	
Speakerphone:	2-way	Mute Button Enabled?	У		
Display Language:	english	Button Modules:	0		
Survivable GK Node Name:					
Survivable COR:	internal	Media Complex Ext:			
Survivable Trunk Dest?	У	IP SoftPhone?	У		
IP Video Softphone?		У			
Short/Prefixed Registration Allowed:		def	fault		
		Customizable Labels?	У		

Navigate to **Page 2** and enter the following values for the specified fields, and retain the default values for the remaining fields.

Restrict Last Appearance: y

On Page 4 of the Station form assign three "call-appr" in Button Assignments section.

```
add station 8270006
                                                            Page 4 of
                                     STATION
SITE DATA
                                                        Headset? n
     Room:
      Jack:
                                                        Speaker? n
                                                       Mounting: d
     Cable:
      Floor:
                                                    Cord Length: 0
  Building:
                                                      Set Color:
ABBREVIATED DIALING
                                List2:
                                                          List3:
    Li st1:
BUTTON ASSIGNMENTS
                                         5:
1: call-appr
2: call-appr
                                         6:
3: call-appr
                                                7:
                                         8:
```

6. Configure Jabra USB Headsets

This section covers the steps to integrate Jabra Jabra PRO 920 Wireless headsets with Avaya 96x1 IP Deskphones. The Link 33 EHS cable is connected to the Headset port on the back of the 96x1 Series IP Deskphones. No further configuration is required.

7. Verification Steps

This section verifies that the Jabra solution has been successfully integrated with 96x1 Series IP Deskphones.

- 1. Verify that the Jabra headset has been successfully installed and is ready for use with 96x1 Series IP Deskphones.
- 2. Once the Jabra headset is selected in 96x1 Series IP Deskphones, verify that incoming and outgoing calls can be established with two-way audio to the headset.

8. Conclusion

These Application Notes describe the configuration steps required to integrate Jabra 920 PRO Wireless Headset via a Jabra LINK 33 EHS cable with 96x1 Series IP Deskphones. All test cases were completed successfully with observations noted in **Section 2.2**.

9. Additional References

This section references the Avaya and Jabra documentation that are relevant to these Application Notes.

The following Avaya product documentation can be found at http://support.avaya.com.

- [1] Administering Avaya Aura® Communication Manager, Release 7.0, Issue 1, August 2015, Document Number 03-300509.
- [2] Communication Manager Overview and Specification, Release 7.0, Issue 1.0, August 2015, Document Number 03-604233.
- [3] Administering Avaya 9608/9608G/9611G/9621G/9641G/9641GS IP Deskphones H.323, Release 6.6, April 2015
- [4] The installation documentation for Jabra Direct can be found at http://www.jabra.com/support/

©2016 Avaya Inc. All Rights Reserved.

Avaya and the Avaya Logo are trademarks of Avaya Inc. All trademarks identified by ® are registered trademarks or trademarks, respectively, of Avaya Inc. All other trademarks are the property of their respective owners. The information provided in these Application Notes is subject to change without notice. The configurations, technical data, and recommendations provided in these Application Notes are believed to be accurate and dependable, but are presented without express or implied warranty. Users are responsible for their application of any products specified in these Application Notes.

Please e-mail any questions or comments pertaining to these Application Notes along with the full title name and filename, located in the lower right corner, directly to the Avaya DevConnect Program at devconnect@avaya.com.